



OA254AP Series



AC Fans - 115, 230V
254mm x 89mm (10" x 3.5")

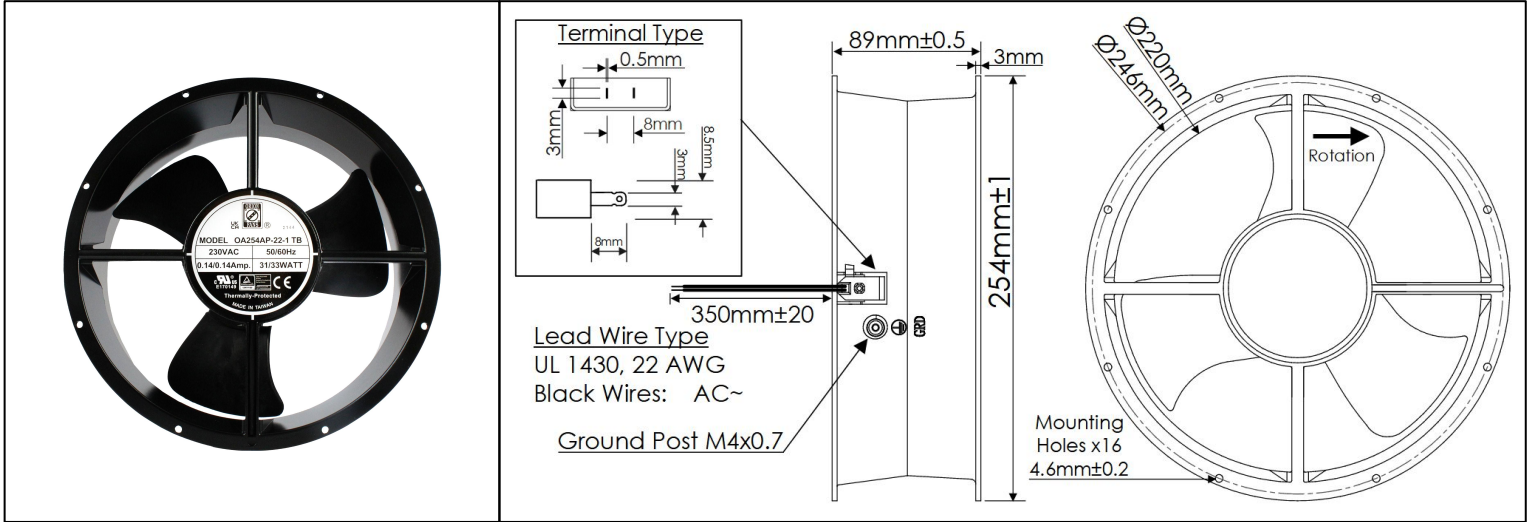

Frame	Die Cast Aluminum, Black Finish	Operating Temperature -20°C ~ +80°C Storage Temperature -40°C ~ +80°C Life Expectancy 60,000 Hours (L10 at 40°C) Available Options Tachometer Output IP Ratings Weight: 4.2 lbs.
Impeller	PBT, UL94 V-0 Plastic	
Connection	2x Wire Leads, 22 AWG, or Terminals	
Motor	AC Capacitor Induction, Thermally Protected	
Bearing System	Ball Bearings	
Dielectric Strength	1500VAC/min, <1mA	
Insulation Resistance	≥10MΩ @ 500 VDC	

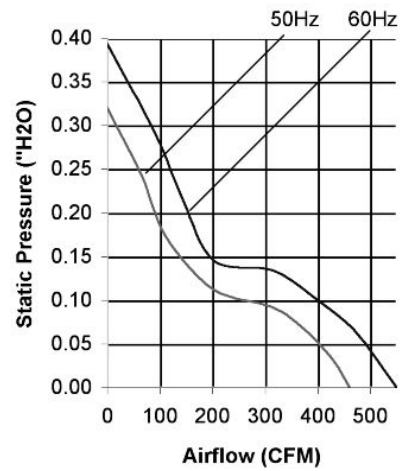

Part Number	Rated Voltage (Volts AC)	Frequency Range (Hertz)	Voltage Range (Volts AC)	Rated Current (Amps)	Locked Current (Amps)	Input Power (Watts)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure (\"H ₂ O)
OA254AP-11-1*B	115	50 / 60	80 ~ 130	0.30 / 0.29	0.53 / 0.51	31 / 33	1400 / 1650	460 / 547	52 / 55	0.32 / 0.39
OA254AP-22-1*B	230	50 / 60	160 ~ 260	0.14 / 0.14	0.26 / 0.26	31 / 33	1400 / 1650	460 / 547	52 / 55	0.32 / 0.39

*Substitute "W" for Wire Lead type power connection, or "T" for Terminal type power connection.