



OA938AP Series



AC Fans - 115, 230V
92mm x 38mm (3.62" x 1.50")

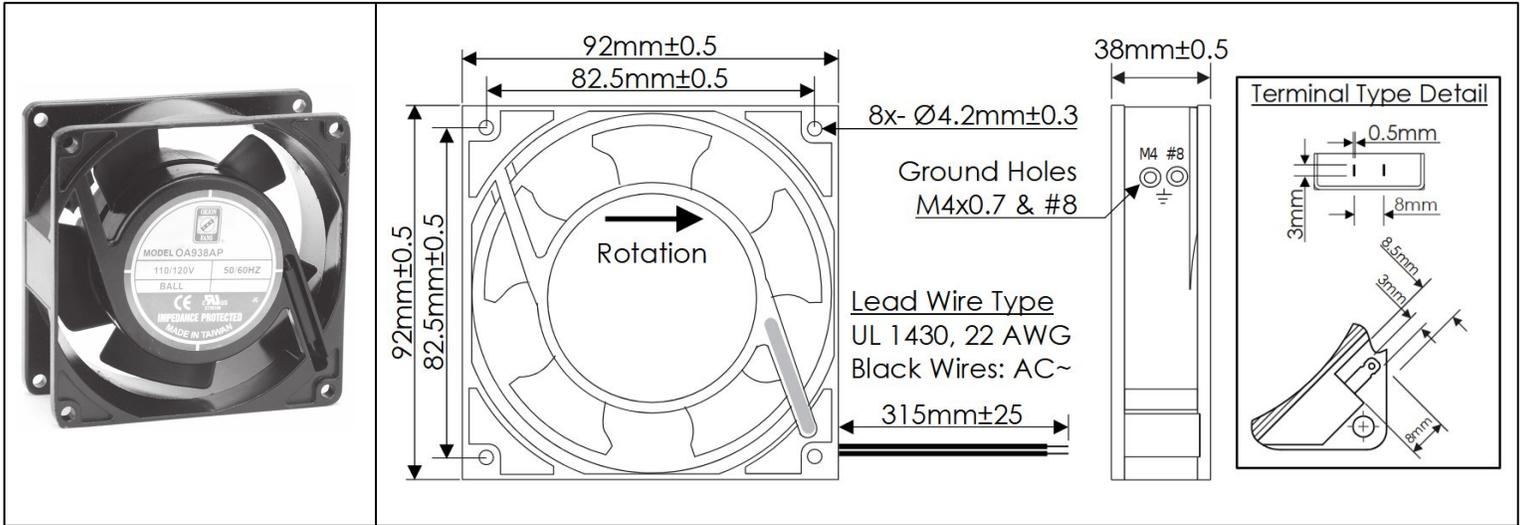

Frame	Die Cast Aluminum, Black Finish	<u>Operating Temperature</u> -20°C ~ +70°C <u>Storage Temperature</u> -40°C ~ +100°C <u>Life Expectancy</u> 90,000 Hours (L10 at 45°C) <u>Available Options</u> IP Ratings Weight: 1.1 lbs.
Impeller	PBT, UL94 V-0 Plastic	
Connection	2x Wire Leads, UL 1430 22 AWG, or Terminals	
Motor	Shaded Pole, Impedance Protected	
Bearing System	Dual Ball Bearings	
Dielectric Strength	1500VAC/min, <1mA	
Insulation Resistance	≥10MΩ @ 500 VDC	

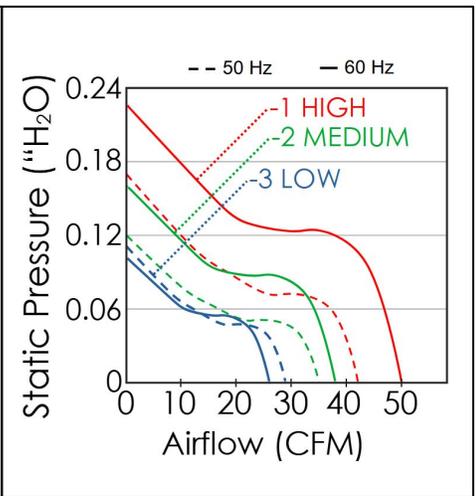

Part Number	Rated Voltage (Volts AC)	Voltage Range (Volts AC)	Frequency (Hz)	Input Power (Watts)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H ₂ O)
OA938AP-11-1*B	115	100 ~ 130	50 / 60	11 / 9	2600 / 3100	42 / 50	33.1	0.17 / 0.22
OA938AP-11-2*B	115	100 ~ 130	50 / 60	7 / 5	2350 / 2500	35 / 38	27.4	0.12 / 0.16
OA938AP-11-3*B	115	100 ~ 130	50 / 60	4 / 3	2200 / 1850	29 / 26	24.2	0.11 / 0.10
OA938AP-22-1*B	230	200 ~ 255	50 / 60	11 / 9	2600 / 3100	42 / 50	33.1	0.17 / 0.22
OA938AP-22-2*B	230	200 ~ 255	50 / 60	7 / 5	2350 / 2500	35 / 38	27.4	0.12 / 0.16
OA938AP-22-3*B	230	200 ~ 255	50 / 60	4 / 3	2200 / 1850	29 / 26	24.2	0.11 / 0.10

* Substitute "T" for Terminal type power connection, or "W" for Wire Lead power connection.