


OD9225 IP68 Series



DC Fans - 12, 24, 48V
92mm x 25mm (3.62" x 1.0")

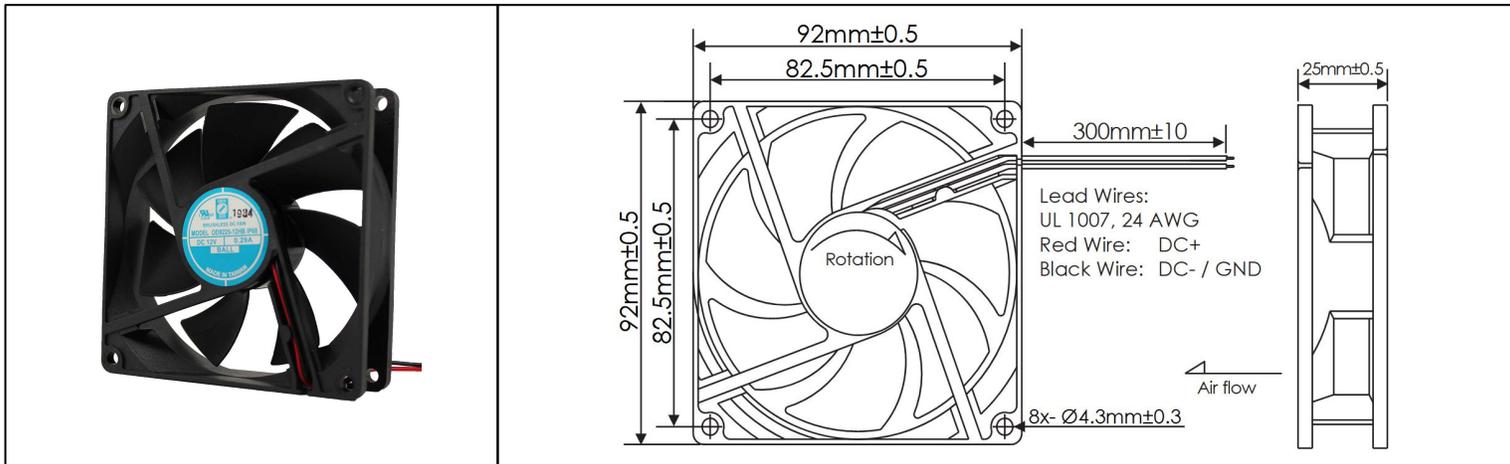

Frame	PBT, UL94 V-0 Plastic	Operating Temperature -20°C ~ +65°C
Impeller	PBT, UL94 V-0 Plastic	
Connection	2x Lead Wires, 24 AWG	Storage Temperature -20°C ~ +75°C
Motor	Brushless DC, Auto Cutoff, Auto Restart, Polarity Protected, Electronically Protected, IP68	
Bearing System	Dual Ball Bearings	Life Expectancy 70,000 Hours (L10 at 40°C)
Dielectric Strength	500VDC/min, <1mA	
Insulation Resistance	≥10M Ohm @ 500 VDC	Available Options Tachometer Output Alarm Output PWM Speed Control Input 5V Models IP Ratings

Weight: 0.21 lbs.

Part Number	Rated Voltage (Volts DC)	Voltage Range (Volts DC)	Input Power (Watts)	Rated Current (Amps)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H ₂ O)
OD9225-12HHBIP68	12	8 ~ 13.8	3.0	0.29	3325	60.2	38	0.25"
OD9225-12HBIP68	12	8 ~ 13.8	3.0	0.29	2900	49.8	35	0.24"
OD9225-12MBIP68	12	8 ~ 13.8	2.1	0.20	2475	35.3	30	0.18"
OD9225-12LBIP68	12	8 ~ 13.8	1.4	0.12	1850	25.1	23	0.12"
OD9225-24HHBIP68	24	15 ~ 26.4	3.5	0.18	3325	60.2	38	0.25"
OD9225-24HBIP68	24	15 ~ 26.4	3.5	0.18	2900	49.8	35	0.24"
OD9225-24MBIP68	24	15 ~ 26.4	2.8	0.12	2475	35.3	30	0.18"
OD9225-24LBIP68	24	15 ~ 26.4	2.4	0.10	1850	25.1	23	0.12"
OD9225-48HHBIP68	48	28 ~ 52.8	4.3	0.09	3325	60.2	38	0.25"
OD9225-48HBIP68	48	28 ~ 52.8	4.3	0.09	2900	49.8	35	0.24"
OD9225-48MBIP68	48	28 ~ 52.8	2.4	0.05	2475	35.3	30	0.18"
OD9225-48LBIP68	48	28 ~ 52.8	1.9	0.04	1850	25.1	23	0.12"