



SELECTION GUIDE

Storage Solutions



[broadcom.com](https://www.broadcom.com)

The amount and variety of data produced by content-rich Internet, cloud and enterprise applications poses unprecedented challenges for data centers of all sizes.

Table of Contents

- 3** HBAs
- 4** MegaRAID Entry (iMR)
- 5** MegaRAID®
- 6** Advanced Software
- 7** Cache Protection Options
- 8** SAS/SATA Cables for 93xx and 94xx Series
- 9** U.2 Enabled Cables for 94xx Series; Tri-Mode Cables for 95xx Series

New approaches and technologies are needed to manage this deluge of data: to store it, protect it, and maximize the value from it. These challenges present opportunities to help the world make the most from its data.


Broadcom is focused on helping customers in wireless communications, wired infrastructure, enterprise storage and industrial and other markets solve their challenges. Broadcom has the industry's broadest portfolio of storage solutions, backed by decades of experience and trusted by the world's leading server and storage suppliers. Broadcom provides the building blocks for storage solutions that help customers understand, prioritize, store and protect critical data.

Whether you need to protect data, power your storage solutions, or deliver the performance needed by critical applications, Broadcom's 12Gb/s SAS/SATA/NVMe Tri-Mode MegaRAID® controller cards and Host Bus Adapters (HBAs), and Advanced Software Options are the smart choice.



Host Bus Adapters (HBAs)

Equip storage solutions with the connectivity needed to meet any scaling needs from the smallest SMBs to the largest data centers. Broadcom HBAs can enable an easy, long-term storage growth strategy in practically any direct-attached storage scenario. Whether solutions use SAS or SATA, NVMe (PCIe), hard disk or flash, or even internal or external storage elements, our HBAs are designed to create the fabric tying any or all of those components together into a unified storage effort.

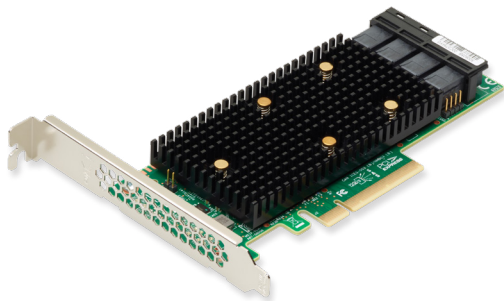


HBA Specifications

Product Name	MPN (SGL)	Form Factor Ports	Ports	Connectors	Bus Interface	Max Devices Supported		RAID Levels
						SAS/SATA	NVMe	
12Gb/s SAS/SATA/NVMe								
9500-16i	05-50077-02	LP-MD2	16	Two SFF-8654	x8 PCIe Gen 4.0	1024	32	JBOD
9500-8i	05-50077-03	LP-MD2	8	One SFF-8654	x8 PCIe Gen 4.0	1024	32	JBOD
9500-16e	05-50075-00	LP-MD2	16	Four SFF-8644	x8 PCIe Gen 4.0	1024	32	JBOD
9500-8e	05-50075-01	LP-MD2	8	Two SFF-8644	x8 PCIe Gen 4.0	1024	32	JBOD
9405W-16i	05-50047-00	LP-MD2	16	Four SFF-8643	x16 PCIe Gen 3.0	1024	24	JBOD
9405W-16e	05-50044-00	LP-MD2	16	Four SFF-8644	x16 PCIe Gen 3.0	1024	24	JBOD
9400-8i8e	05-50031-02	LP-MD2	16	Two SFF-8643; Two SFF-8644	x8 PCIe Gen 3.0	1024	24	JBOD
9400-16i	05-50008-00	LP-MD2	16	Four SFF-8643	x8 PCIe Gen 3.0	1024	24	JBOD
9400-16e	05-50013-00	LP-MD2	16	Four SFF-8644	x8 PCIe Gen 3.0	1024	24	JBOD
9400-8i	05-50008-01	LP-MD2	8	Two SFF-8643	x8 PCIe Gen 3.0	1024	24	JBOD
9400-8e	05-0013-01	LP-MD2	8	Two SFF-8644	x8 PCIe Gen 3.0	1024	24	JBOD
12Gb/s SAS/SATA								
9305-24i	05-25699-00	LP-MD2	24	Six SFF-8643	x8 PCIe Gen 3.0	1024		JBOD
9305-16e	05-25704-00	LP-MD2	16	Four SFF-8644	x8 PCIe Gen 3.0	1024		JBOD
9305-16i	05-25703-00	LP-MD2	16	Four SFF-8643	x8 PCIe Gen 3.0	1024		JBOD
9302-16e	05-25688-00	Full-Height	16	Four SFF-8644	x8 PCIe Gen 3.0	1024		JBOD
9300-8e	H5-25460-00	LP-MD2	8	Two SFF-8644	x8 PCIe Gen 3.0	1024		JBOD
9300-8i	H5-25573-00	LP-MD2	8	Two SFF-8643	x8 PCIe Gen 3.0	1024		JBOD
9300-4i4e	H5-25515-00	LP-MD2	8	One SFF-8643 One SFF-8644	x8 PCIe Gen 3.0	1024		JBOD
9300-4i	H5-25473-00	LP-MD2	4	One SFF-8643	x8 PCIe Gen 3.0	1024		JBOD

MegaRAID Entry (iMR)

MegaRAID SAS/SATA/NVMe entry controller cards provide trusted MegaRAID data protection and reliability for non-business critical applications. Offering the same management features and OS support as the mainstream MegaRAID lineup at an affordable price point, the entry controllers are great solutions for small and medium businesses (SMB) deploying entry-level server platforms and workstations.

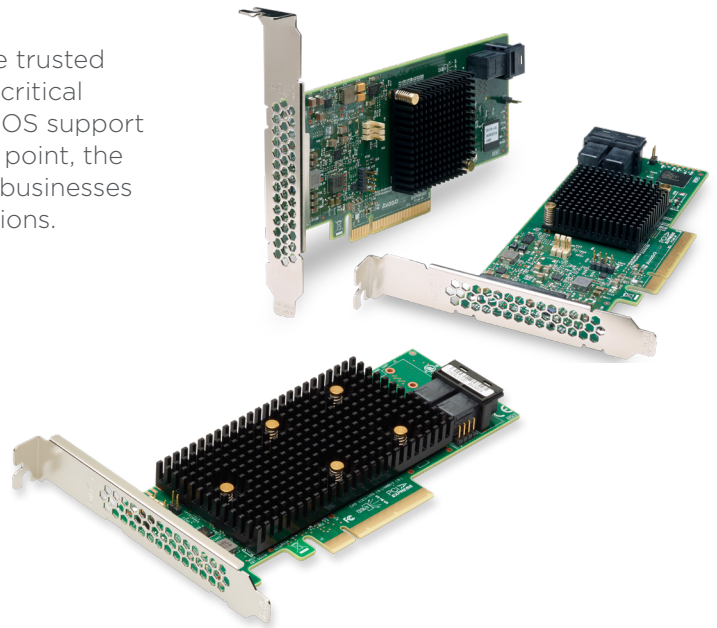

MegaRAID Entry (iMR) Specifications

Product Name	MPN (SGL)	Form Factor	Ports	Connectors	Bus Interface	Processor
12Gb/s SAS/SATA/NVMe						
9440-8i	05-50008-02	LP-MD2	8	Two SFF-8643	x8 PCIe Gen 3.0	SAS3408
12Gb/s SAS/SATA						
9341-4i	05-26105-00	LP-MD2	4	One SFF-8643	x8 PCIe Gen 3.0	SAS3008
9341-8i	05-26106-00	LP-MD2	8	Two SFF-8643	x8 PCIe Gen 3.0	SAS3008




MegaRAID

Ensure critical data is protected and available with the most widely deployed RAID data protection architecture. Broadcom enables high performance storage connectivity and flexible system designs that support any combination of NVMe, SAS and SATA devices with the industry’s first hardware RAID adapter with Tri-Mode SerDes technology.

The MegaRAID Tri-Mode storage adapters bring NVMe performance benefits to the storage tier by providing connectivity and data protection that MegaRAID technology has offered for over 20 years for SAS/SATA interfaces.

Broadcom’s Tri-Mode SerDes technology enables operation of NVMe, SAS or SATA deices in a single drive bay. A single controller can operating in all three modes concurrently servicing NVMe, SAS or SATA devices. Tri-Mode support provides a non-disruptive way to evolve existing data center infrastructure.

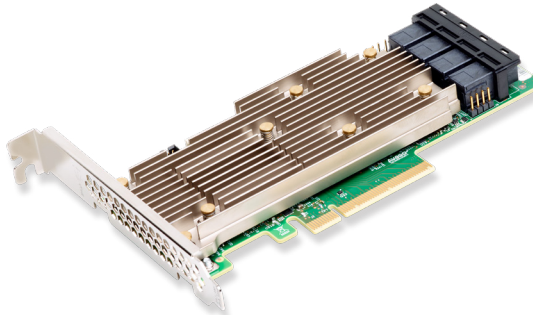

MegaRAID Specifications


Product Name	MPN (SGL)	Form Factor	Ports	Connectors	Bus Interface	Max Devices Supported		Cache Memory	Cache Protection*
						SAS/SATA	NVMe		
12Gb/s SAS/SATA/NVMe									
9560-16i	05-50077-00	LP-MD2	16	Two SFF-8654	x8 PCIe Gen 4.0	240	32	8GB	CVPM05
9560-8i	05-50077-01	LP-MD2	8	One SFF-8654	x8 PCIe Gen 4.0	240	32	4GB	CVPM05
9580-8i8e	05-50076-00	LP-MD2	16	Two SFF-8654, Two SFF-8644	x8 PCIe Gen 4.0	240	32	8GB	CVPM05
9460-16i	05-50011-00	LP MD2	16	Four SFF-8643	x8 PCIe Gen 3.0	240	24	4GB	CVPM05
9460-8i	05-50011-02	LP MD2	8	Two SFF-8643	x8 PCIe Gen 3.0	240	24	2GB	CVPM05
9480-8i8e	05-50031-00	LP MD2	16	Two SFF-8643, Two SFF-8644	x8 PCIe Gen 3.0	240	24	4GB	CVPM05
12Gb/s SAS/SATA									
9365-28i	05-50028-00	LP MD2	28	Six SFF-8643, One SFF-8654	x8 PCIe Gen 3.0	240		4GB	CVPM05
9361-24i	05-50011-00	LP MD2	24	Six SFF-8643	x8 PCIe Gen 3.0	240		4GB	CVPM02
9361-16i	05-25708-00	LP MD2	16	Four SFF8643	x8 PCIe Gen 3.0	240		2GB	CVPM02
9361-8i	05-25420-08	LP MD2	8	Two SFF-8643	x8 PCIe Gen 3.0	128		1GB	CVM02
	05-25420-17	LP MD2	8	Two SFF-8643	x8 PCIe Gen 3.0	128		2GB	CVM02
9361-4i	05-25420-10	LP MD2	4	One SFF-8643	x8 PCIe Gen 3.0	128		1GB	CVM02
9380-8e	05-25528-04	LP MD2	8	Two SFF-8644	x8 PCIe Gen 3.0	240		1GB	CVM02
9380-8i8e	05-25716-00	LP MD2	16	Two SFF-8643, Two SFF-8644	x8 PCIe Gen 3.0	240		2GB	CVPM02
9380-4i4e	05-25190-02	LP MD2	8	One SFF-8643, OneSFF-8644	x8 PCIe Gen 3.0	240		1GB	CVM02

* CacheVault Kit/Power Module sold separately

Advanced Software

SafeStore™

Whether it is sensitive customer information, intellectual property or proprietary data that helps a company reach its strategic objectives, a company's data may be its most valuable asset. If this data is misplaced or stolen, organizations run the risk of lost revenue, legal implications and a tarnished reputation. With SafeStore™ software, businesses can be assured that the highest level of security is placed on their data, while preserving system performance and ease-of-use. Together with self-encrypting drives (SEDs), SafeStore software secures a drive's data from unauthorized access or modification resulting from theft, loss or repurposing of drives.

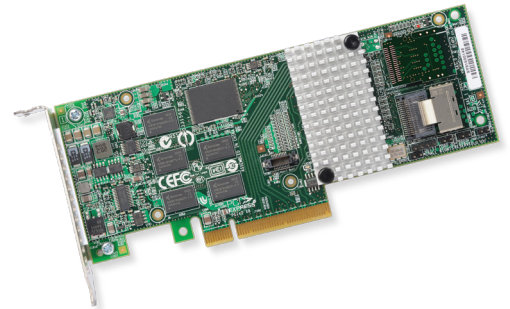


SafeStore Software

Product	MPN	Product Name
MegaRAID SafeStore Software Physical Key*	L5-25188-01	MegaRAID 9361, 9380, 9460 and 9480 Series

*Enabled by default on MegaRAID 95xx Series

CacheCade® Pro 2.0

CacheCade Pro 2.0 software provides a combination of caching intelligence and trusted MegaRAID data protection to accelerate applications in direct-attached storage environments. When IT pushes hard disk drives (HDD) arrays to reach their I/O potential, data "hot spots" become inevitable. Utilizing a small solid state drive (SSD) investment as a front-side flash cache for the much larger disk array, CacheCade Pro 2.0 software dynamically keeps the "hottest" data in flash memory. This can dramatically improve read/write speeds and drop latency.

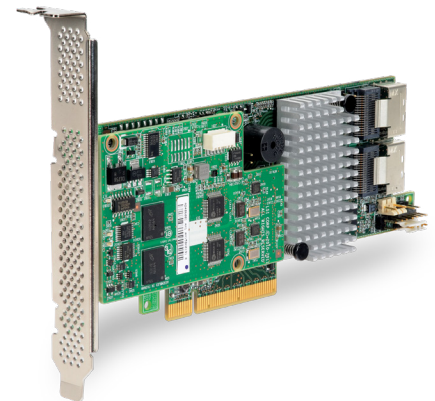

CacheCade Pro 2.0 Software

Product	MPN	Product Name
MegaRAID CacheCade Pro 2.0 Software Pack with Fast Path (physical key)	L5-25188-04	MegaRAID 9361 and 9380 Series

Cache Protection Options

RAID caching is a cost-effective way to improve I/O performance by writing data to a controllers' cache before it is written to disk. In write-back mode, data written to cache is vulnerable until it is made permanent on disk. To help avoid the possibility of data loss or corruption during a power or server failure, Broadcom offers the CacheVault flash cache protection module or the battery backup units for MegaRAID SAS controllers cards.

Cache Protection Product Specifications

Cache Protection Option	MPN	Compatible Controller Cards
CVPM05	05-50039-00	MegaRAID 9365, 9460, 9480, 9560 and 9580 Series
CVPM02	05-50038-00	MegaRAID 9361, 9380 Series
CVM02	05-25444-00	MegaRAID 9361 and 9380 Series
BBU-BRACKET-05	L5-25376-00	MegaRAID Remote Mounting Board for LSI BBUs and CacheVault Power Modules

For additional details, view the Cache Protection Options Matrix.



SAS/SATA Cables for 93xx and 94xx Series

Cable Specifications

Product	MPN	Length	Sideband Support	To Controller	To Drives/ Backplane	Compatible Controllers ("i" = internal connectivity, "e" = external connectivity)
CBL-SFF8644-8088-10M	L5-25196-00	1.0m		SFF-8644	SFF-8088	External connectivity: MegaRAID 9380 (-4i4e, -8e) MegaRAID 9480-8i8e SAS 9305-16e SAS 9300 (-4i4e, -8e) HBA 9400-16e (-8e) HBA 9405W-16e
CBL-SFF8644-8088-20M	L5-25199-00	2.0m				
CBL-SFF8644-8088-60M	L5-25194-00	6.0m				
CBL-SFF8644-10M	L5-25198-00	1.0m		SFF-8644	SFF-8644	
CBL-SFF8644-20M	L5-25201-00	2.0m				
CBL-SFF8644-60M	L5-25195-00	6.0m				
CBL-SFF8643-8087-06M	05-26117-00	0.6m		SFF-8643	SFF-8087	Internal connectivity: MegaRAID 9380-4i4e MegaRAID 9361 (-4i, -8i) MegaRAID 9341 (-4i, -8i) MegaRAID 9365-28i MegaRAID 9460-16i (-8i) MegaRAID 9480-8i8e MegaRAID 9440-8i SAS 9305 (16i, 24i) SAS 9300 (-4i, -4i4e, -8i) HBA 9400-16i (-8i) HBA 9405W-16i
CBL-SFF8643-8087-08M	05-26118-00	0.8m				
CBL-SFF8643-8087-10M	05-26119-00	1.0m				
CBL-SFF8643-06M	05-26114-00	0.6m		SFF-8643	SFF-8643	
CBL-SFF8643-08M	05-26113-00	0.8m				
CBL-SFF8643-10M	05-26112-00	1.0m				
CBL-SFF8643-SATASB-05M	L5-00219-00	0.5m	✓	SFF-8643	x4 SATA	
CBL-SFF8643-SATASB-06M	L5-00220-00	0.6m	✓			
CBL-SFF8643-SATASB-10M	L5-00221-00	1.0m	✓			
CBL-SFF8643-SAS8482SB-06M	L5-00222-00	0.6m	✓	SFF-8643	SFF-8482	
CBL-RA8643-04M	L5-00223-00	0.4m		SFF-8643 (RA)	SFF-8643	
CBL, RA x4 SFF-8654 to x4 SFF-8643 1M	05-50066-00	1.0M	✓	SFF-8654 (RA)	SFF-8643	9365-28i

U.2 Enabled Cables for 94xx Series

Cable Specifications

These cables enable connections from 9400 series MegaRAID and HBA Tri-Mode Adapters to NVMe storage devices either through backplane or direct to drive connections.

MPN	Description	Length	Side Bands Supported	To Controller	To Drives/Backplane	Compatible Controllers (i = internal, e = external connectivity)
05-50061-00*	Cable, U.2 Enabler, HD to HD(W) 1M	1m	Yes	x8 SFF-8643	2 x4 SFF-8643 Mini SAS HD (White)	Internal Connectivity: MegaRAID 9460 (-16i, 8i) MegaRAID 9480 (-8i8e) MegaRAID 9440 (-8i) HBA 9400 (-16i, -8i, -8i8e) HBA 9405W (-16i)
05-50062-00	Cable, U.2 Enabler, HD to OCuLink 1M	1m	Yes	x8 SFF-8643	2 x4 SFF-8612 OCuLink	
05-50063-00	Cable, U.2 Enabler, HD to SlimLine 1M	1m	Yes	x8 SFF-8643	2 x4 SFF-8654 SlimLine	
05-50065-00	Cable, U.2 Enabler, HD to SFF8639 0.5M	0.5m	Yes	x8 SFF-8643	2 x4 SFF-8639 Direct Drive Connect	
05-50064-00	Cable, U.2 Enabler, HD to SFF8639 1M	1m	Yes	x8 SFF-8643	2 x4 SFF-8639 Direct Drive Connect	

*U.2 Enabled cable 05-50061-00 designed for SuperMicro NVMe enabled backplanes. These backplanes identify NVMe drive connections through white Mini SAS HD connectors.

Tri-Mode Cable for 95xx Adapter Generation


Cable Specifications

These cables enable connection from 95xx series MegaRAID and HBA Tri-Mode adapters to SAS, SATA, and PCIe (NVMe) devices.

MPN	Description	Length	Side Bands Supported	To Controller	To Devices/Backplane	Compatible Controllers (i = internal, e = external connectivity)
05-60001-00	Cable, x8 8654 to 2x4 8612, AltWiring 1M	1m	Yes	SFF-8654 (SlimSAS)	2 x4 SFF-8612 (OCuLink)	9560-16i 9560-8i 9580-8i8e 9500-16i 9500-8i
05-60002-00	Cable, x8 8654 to 2x4 8643 (W), SMC 1M	1m	Yes	SFF-8654 (SlimSAS)	2 x4 SFF-8643 Mini SAS HD (NVMe Connection)*	
05-60003-00	Cable, x8 8654 to 2x4 8643, 9402 SAS 1M	1m	Yes	SFF-8654 (SlimSAS)	2 x4 SFF-8643 Mini SAS HD (SAS Connections)	
05-60004-00	Cable, x8 8654 to 2x4 8654, 9402 1M	1m	Yes	SFF-8654 (SlimSAS)	2 x4 SFF8654 SlimSAS	
05-60005-00	Cable, x8 8654 to 2xU.2 Direct, 1M	1m	Yes	SFF-8654 (SlimSAS)	2xU.2 Direct Connect	
05-60006-00	Cable, x8 8654 to 8xU.3 Direct 1M	1m	Yes	SFF-8654 (SlimSAS)	8xU.3 Direct Connect	
05-60007-00	Cable, x8 8654 to 1x8 8654, 9402 1M	1m	Yes	SFF-8654 (SlimSAS)	1 x8 SFF8654 SlimSAS	

*Cable 05-60002-00 is designed for SuperMicro NVMe enabled backplanes using white Mini SAS HD connectors for the NVMe connections.

Connecting everything®



Broadcom Inc. is a global infrastructure technology leader built on 50 years of innovation, collaboration and engineering excellence.

Broadcom Inc. (NASDAQ: AVGO) is a global technology leader that designs, develops and supplies a broad range of semiconductor and infrastructure software solutions. Broadcom's category-leading product portfolio serves critical markets including data center, networking, enterprise software, broadband, wireless, storage and industrial. Our solutions include data center networking and storage, enterprise, mainframe and cyber security software focused on automation, monitoring and security, smartphone components, telecoms and factory automation.



For more product information: [broadcom.com/products/storage](https://www.broadcom.com/products/storage)

Copyright © 2020 Broadcom. All Rights Reserved. Broadcom, the pulse logo, connecting everything, MegaRAID, SafeStore and CacheCade are among the trademarks of Broadcom. The term "Broadcom" refers to Broadcom Inc. and/or its subsidiaries. AV00-0315EN June 23, 2020