


MCZ1210DH120CPTA0G



Applications	Commercial Grade
Feature	Multilayer
	Ultra High-speed signal
Series	MCZ
Status	Production
Brand	TDK



Size	
Length(L)	1.25mm ±0.15mm
Width(W)	1.00mm ±0.15mm
Thickness Height	0.50mm ±0.10mm

Electrical Characteristics	
Common-mode Impedance [Typ.]	12Ω at 100MHz
Common-mode Impedance [Min.]	
Common-mode Inductance	
Rated Current	100mA
Rated Voltage	5VDC
Insulation Resistance [Min.]	10MΩ
DC Resistance	1.5Ω Max.




Other	
Operating Temp. Range	-40 to 85°C
Soldering Method	Reflow
	Iron Soldering
AEC-Q200	NO
Packing	Embossed (Plastic)Taping [180mm Reel, Tape width 8mm]
Package Quantity	4000pcs
Weight	0.003g

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

MCZ1210DH120CPTA0G



Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

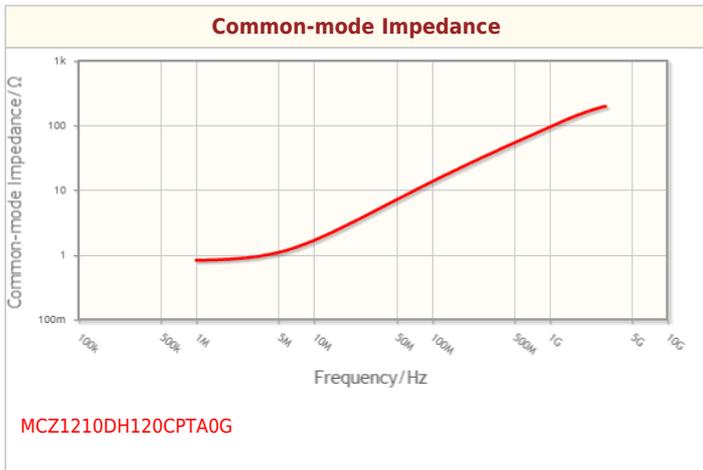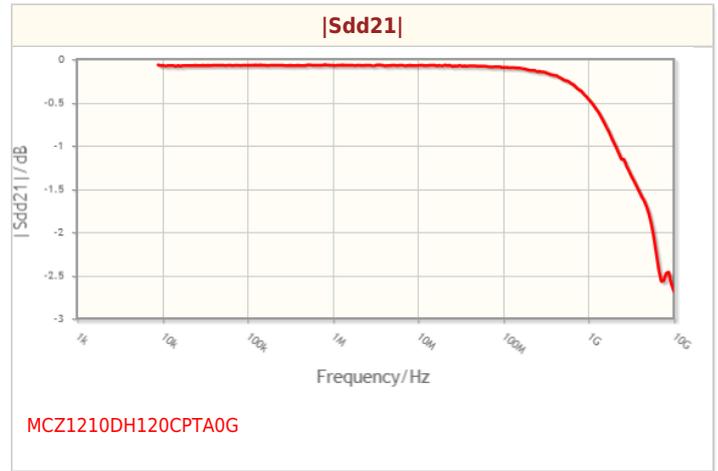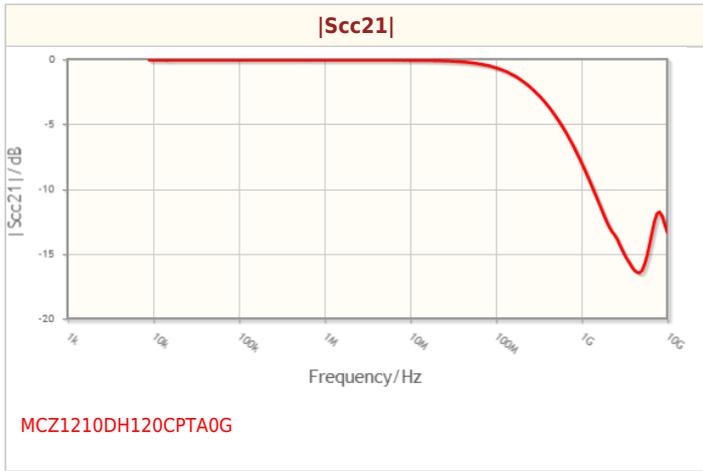

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

MCZ1210DH120CPTA0G



Associated Images

