

TTC-6P-4-24DC-I-P - Surge protection plug



1106015

<https://www.phoenixcontact.com/us/products/1106015>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Surge protection plug with integrated status indicator on the module for a 4-wire floating signal circuit with a high nominal current. Nominal voltage: 24 V DC

Your advantages

- Efficient use of space: the narrowest pluggable surge protection solution for 4-conductor applications
- Easy function monitoring: on-site or optionally via remote signaling, with optical monitoring, without additional effort
- Servicing without affecting the signal: replace the surge protection module without affecting the measuring signal
- Flexible choice: Push-in Technology or screw connection

Commercial data

Item number	1106015
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CL02
Product key	CL216Z
GTIN	4055626990569
Weight per piece (including packing)	17.12 g
Weight per piece (excluding packing)	16.62 g
Customs tariff number	85363010
Country of origin	DE

TTC-6P-4-24DC-I-P - Surge protection plug

1106015

<https://www.phoenixcontact.com/us/products/1106015>

Technical data

Product properties

Product type	Replacement plug
Product family	TERMITRAB complete
Type	Male

Insulation characteristics

Overvoltage category	III
Pollution degree	2


Electrical properties

Nominal voltage U_N	24 V DC
	24 V AC

Connection data

Connection method	pluggable
-------------------	-----------

Dimensions

Dimensional drawing	
Width	6.2 mm +0.1 mm
Height	39 mm
Depth	60.3 mm

Material specifications

Color	light gray (RAL 7035)
Flammability rating according to UL 94	V-0
Insulating material	PBT
Housing material	PBT

Protective circuit

Direction of action	Line-Line & Line-Earth Ground
Maximum continuous operating voltage U_C	36 V DC
	30 V AC
Rated current	2.5 A (60°C for insulated systems)
Surge protection fault message	optical

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
----------------------	------

TTC-6P-4-24DC-I-P - Surge protection plug



1106015

<https://www.phoenixcontact.com/us/products/1106015>

Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	≤ 4000 m (amsl)
Permissible humidity (operation)	5 % ... 95 %

Standards and regulations

Standards/specifications	IEC 61643-21
Note	2000 + corrigendum 2001 + A1:2008, modified + A2:2012

EN 61643-21

Standards/specifications	EN 61643-21
Note	2001 + A1:2009 + A2:2013

Mounting

Mounting type	on base element
---------------	-----------------


TTC-6P-4-24DC-I-P - Surge protection plug

1106015


<https://www.phoenixcontact.com/us/products/1106015>

Drawings

Dimensional drawing

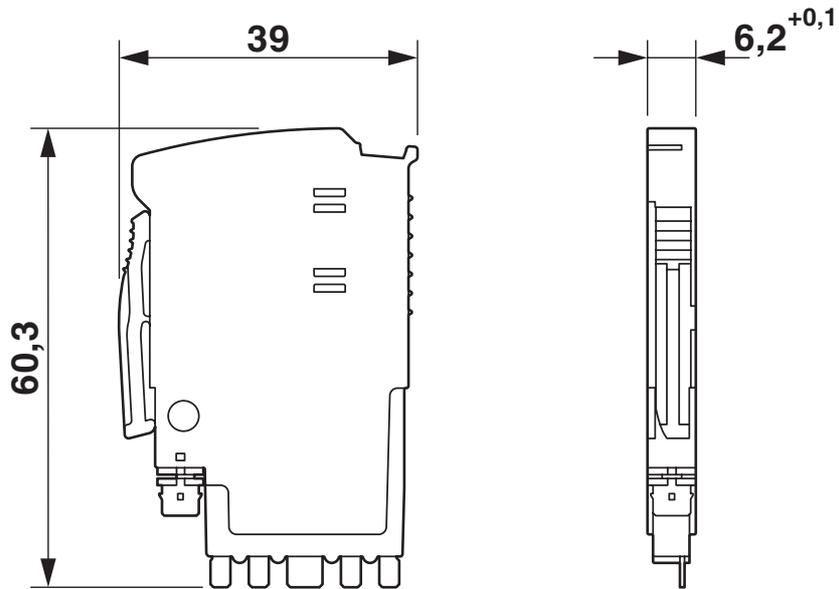

Circuit diagram

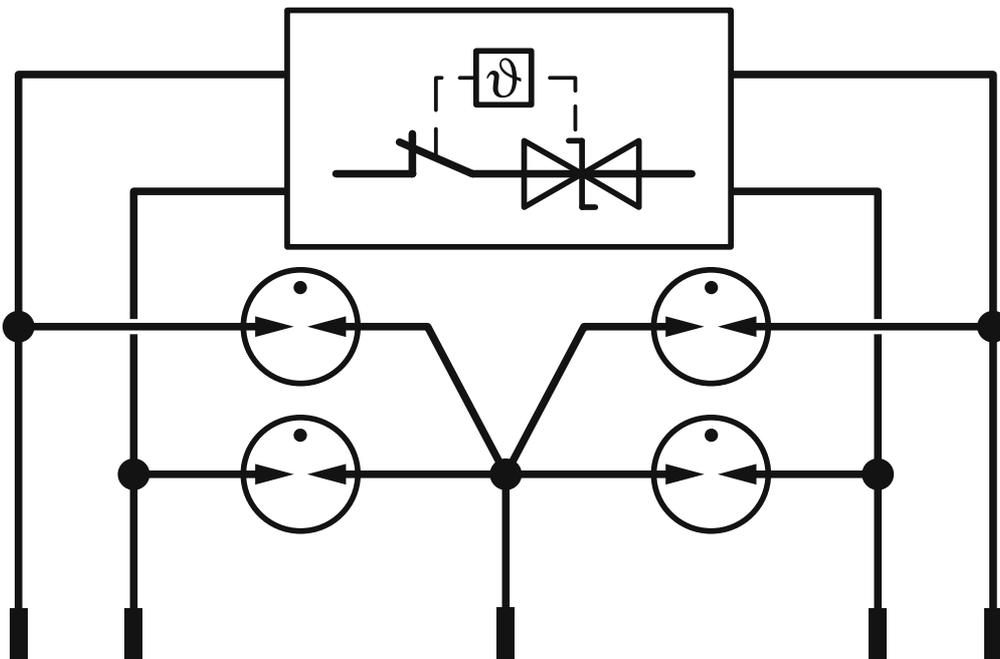

TTC-6P-4-24DC-I-P - Surge protection plug



1106015

<https://www.phoenixcontact.com/us/products/1106015>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1106015>



UL Listed

Approval ID: FILE E 138168

UAE-RoHS

Approval ID: 22-06-16783



UL Listed

Approval ID: FILE E 138168



cUL Listed

Approval ID: FILE E 333250



UL Listed

Approval ID: FILE E 333250



cULus Listed

Approval ID: File E 333250

TTC-6P-4-24DC-I-P - Surge protection plug



1106015

<https://www.phoenixcontact.com/us/products/1106015>

Classifications

ECLASS

ECLASS-13.0	27171592
ECLASS-15.0	27171592

ETIM

ETIM 9.0	EC002497
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

TTC-6P-4-24DC-I-P - Surge protection plug



1106015

<https://www.phoenixcontact.com/us/products/1106015>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	757da08a-0abb-444a-bf4b-bfa26b245432

EF3.0 Climate Change

CO2e kg	1.043 kg CO2e
---------	---------------

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com