

### Customer Part:



#### Description

- 32.768kHz miniature 2 x 1.6mm crystal oscillator in an hermetically sealed ceramic package with a seam sealed metal lid.
- Model IQXO-404
- Model Issue number 5

#### Frequency Parameters

- Frequency 32.7680kHz
- Frequency Stability  $\pm 100.00\text{ppm}$
- Operating Temperature Range  $-40.00$  to  $125.00^\circ\text{C}$
- Ageing  $\pm 3\text{ppm}$  max per year @  $25^\circ\text{C}$

#### Electrical Parameters

- Supply Voltage  $1.8\text{V} \pm 5\%$
- Current Draw  $0.200\text{mA}$

#### Output Details

- Output Compatibility CMOS
- Drive Capability  $15\text{pF}$  max
- Rise and Fall Time  $100.0\text{ns}$  max
- Duty Cycle 40/60

#### Output Control

- Standby Operation:  
Logic '1' ( $\geq 70\%V_s$ ) to pad 1 enables oscillator output  
Logic '0' ( $\leq 30\%V_s$ ) to pad 1 disables oscillator output; when disabled the oscillator output goes to the high impedance state.  
No connection to pad 1 enables oscillator output.
- Standby Current:  
 $10\mu\text{A}$  max @  $-40$  to  $85^\circ\text{C}$   
 $20\mu\text{A}$  max @  $-40$  to  $125^\circ\text{C}$
- Start-up Time:  $10\text{ms}$  max  
 $0.3\text{ms}$  typ to 90% of final amplitude (under ideal conditions @  $25^\circ\text{C}$ )

#### Environmental Parameters

- Storage Temperature Range:  $-55$  to  $125^\circ\text{C}$
- Shock :  $1500\text{G}$ ,  $0.5\text{ms}$ , 3 times for each surface, total 18 times.
- Vibration: Frequency range:  $20\sim 2000\text{Hz}$ , peak to peak amplitude  $1.52\text{mm}$ , peak acceleration:  $20\text{g}$  ( $196\text{m/s}^2$ ), 3 directions (X, Y, Z), each cycle:  $20\text{min}$ , 4 cycles for each direction.

#### Manufacturing Details


- RoHS Terminations Au over Ni
- RoHS Reflow Temp  $260^\circ\text{C}$  max for 10s max

#### Compliance


- RoHS Status (2015/863/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable



#### Outline (mm)

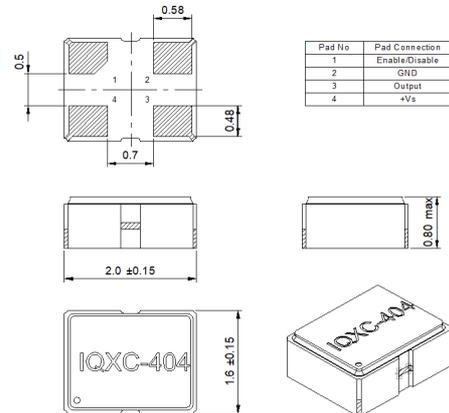

#### Recommended Solder Pad Layout

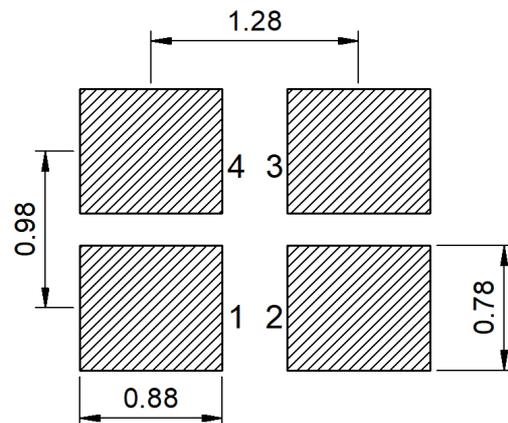

#### Sales Office Contact Details:

UK: +44 (0)1460 270200

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

**Customer Part:**

**Packaging Details**

- Tape & reel in accordance with EIA-481  
Quantities below the standard reel size to be supplied on cut tape.

Standard Pack Quantity: 3,000

---

**Sales Office Contact Details:**

UK: +44 (0)1460 270200

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)