

## Noise suppression filter

For audio lines (Bluetooth and WiFi bands suppression)

MAF series



## MAF0603FA type



## FEATURES

- A compact noise suppression component for audio lines that accommodates high currents.
- Small reductions in volume due to its low resistance, and optimal for devices that require high sound quality as the generating of sound distortions is controlled.
- It is highly effective in suppressing harmonic noise (Bluetooth, WiFi, cellular band) by a Class-D amplifier.
- Operating temperature range: -55 to +125°C

## APPLICATION

- Audio lines for devices such as TWS(True Wireless Stereo), Bluetooth headset, headset, smartphones, tablets and wearable equipments (earphones, microphones, and speakers).
- Audio lines for portable game machines.

## PART NUMBER CONSTRUCTION

<b>MAF</b>	<b>0603</b>	<b>F</b>	<b>AL</b>	<b>470</b>	<b>B</b>	<b>T</b>	<b>000</b>
Series name	L x W x T dimensions 0.6 x 0.3 x 0.3 mm	Characteristics	Internal code	Impedance (Ω) at 100MHz	Type	Packaging style	Internal code

## CHARACTERISTICS SPECIFICATION TABLE

Impedance [100MHz] (Ω)	DC resistance (Ω)	Rated current (mA) max.	Part No.
33 ±25%	0.70	200	<a href="#">MAF0603FAL330BT000</a>
47 ±25%	0.70	200	<a href="#">MAF0603FAL470BT000</a>


## Measurement equipment

Measurement item	Product No. *	Manufacturer
Impedance	4991A+16197A	Keysight Technologies
DC resistance	Type-755611	Yokogawa

\* Equivalent measurement equipment may be used.

# MAF0603FA type

## Z FREQUENCY CHARACTERISTICS

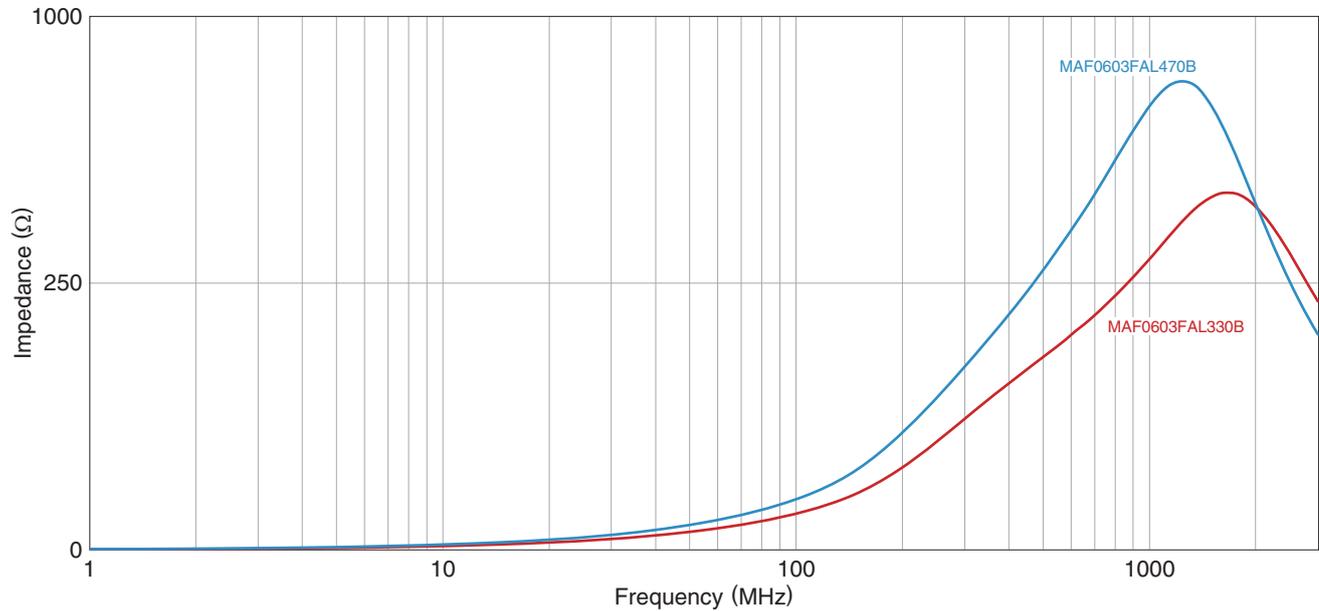


### Measurement equipment

Product No. *	Manufacturer
4991A+16197A	Keysight Technologies


\* Equivalent measurement equipment may be used.

## INSERTION LOSS VS. FREQUENCY CHARACTERISTICS

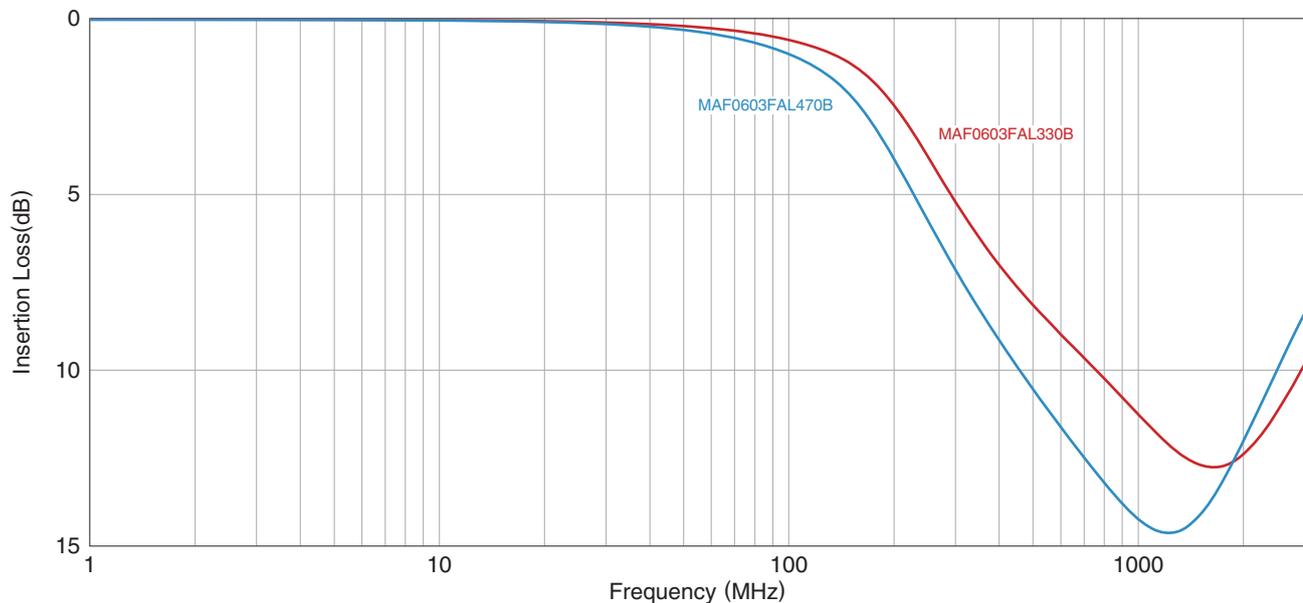


# MAF0603FA type

## SHAPE & DIMENSIONS

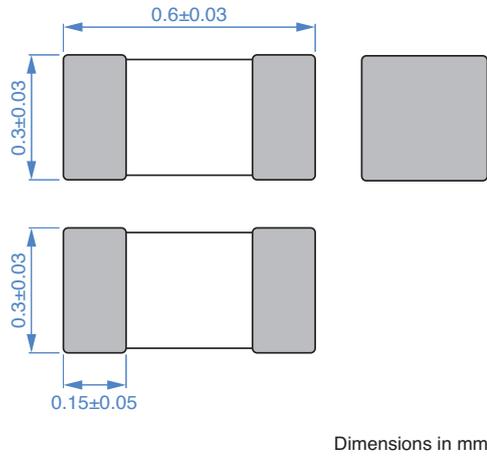


## PACKAGING STYLE


### REEL DIMENSIONS

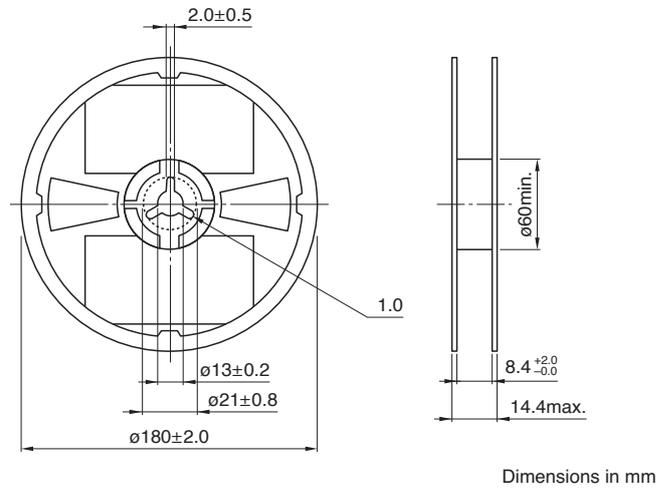

## RECOMMENDED LAND PATTERN


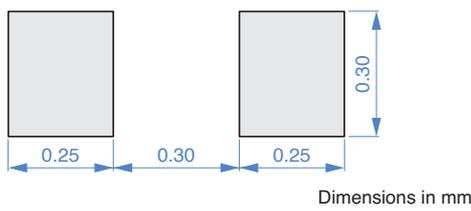


### TAPE DIMENSIONS

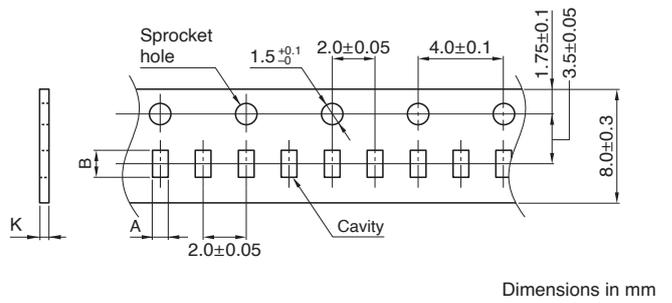

Type	A	B	K
MAF0603FA	0.38±0.05	0.68±0.05	0.5max.

## RECOMMENDED REFLOW PROFILE

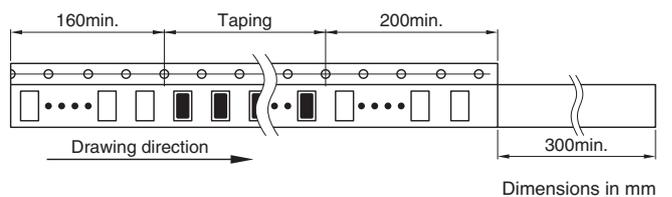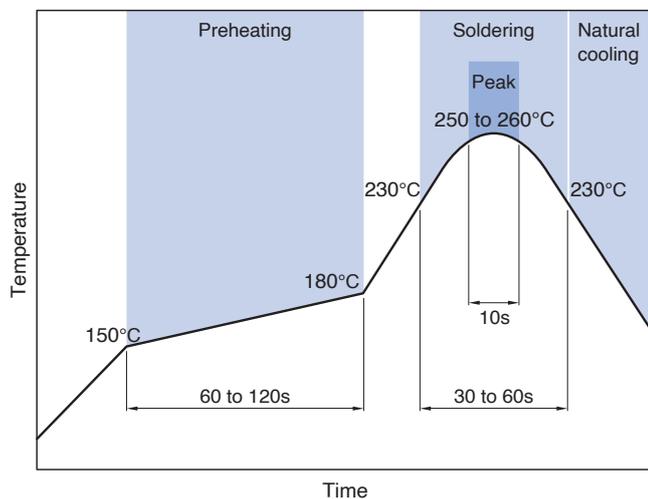

### PACKAGE QUANTITY

Package quantity	15,000 pcs/reel
------------------	-----------------

## TEMPERATURE RANGE, INDIVIDUAL WEIGHT

Operating temperature range	Storage temperature range *	Individual weight
-55 to +125°C	-55 to +125°C	0.3 mg

\* The storage temperature range is for after the assembly.

## REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products

### REMINDERS

- The storage period is within 12 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH or less).  
If the storage period elapses, the soldering of the terminal electrodes may deteriorate.
- Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.  
If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Carefully lay out the coil for the circuit board design of the non-magnetic shield type.  
A malfunction may occur due to magnetic interference.
- Use a wrist band to discharge static electricity in your body through the grounding wire.
- Do not expose the products to magnets or magnetic fields.
- Do not use for a purpose outside of the contents regulated in the delivery specifications.
- The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.  
The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.  
If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- |   |  |
|---|--|
| (1) Aerospace/aviation equipment                                  | (7) Transportation control equipment   |
| (2) Transportation equipment (cars, electric trains, ships, etc.) | (8) Public information-processing equipment                                  |
| (3) Medical equipment   | (9) Military equipment   |
| (4) Power-generation control equipment                            | (10) Electric heating apparatus, burning equipment                           |
| (5) Atomic energy-related equipment                               | (11) Disaster prevention/crime prevention equipment                          |
| (6) Seabed equipment  | (12) Safety equipment  |
|   | (13) Other applications that are not considered general-purpose applications |

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.