

Miniature Slide Switches


Specifications:

Contact rating:	250 V AC, 1 A / 120 V AC or 28 V DC, 3 A
Contact resistance:	< 50 mΩ
Insulation resistance:	> 1000 MΩ
Dielectric strength:	1000 V, 50 Hz for the duration of 1 minute
Operating temperature:	-40 °C to +85 °C
Mechanical life:	minimum 20 000 operations
Material:	Actuator: nylon, black Case: nylon, black Base: nylon, white
Contacts/Terminals:	copper alloy, silver-plating
Soldering conditions:	wave-soldering – max.: 5 sec, 260 °C ± 5 °C


6

Models: Switching functions


MSS 3111 D-R on – on

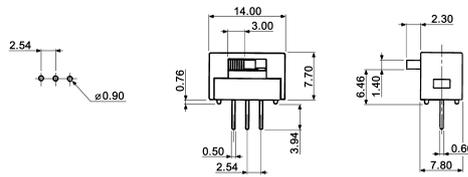



MSS 3112 D on – on

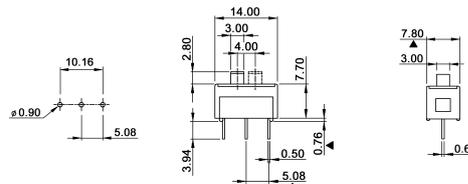

MSS 3122 N on – on

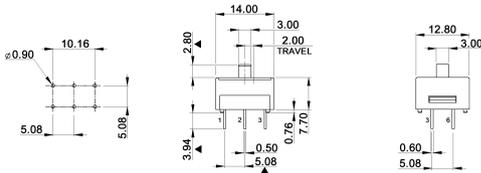

MSS 3122 N-R on – on

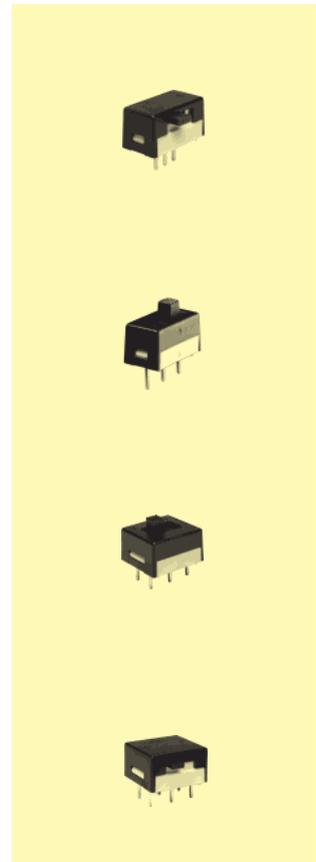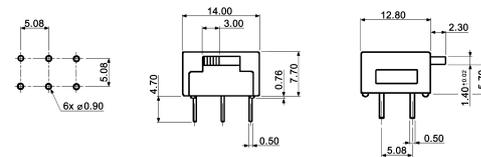

Ordering code:

