



Surface Mount IP67 Sealed Tactile

Specifications

Electrical Ratings	50mA @ 48VDC	Dielectric Strength	250Vrms min
Electrical Life	500,000 cycles typical	Insulation Resistance	≥100MΩ min
Contact Resistance	≤50mΩ initial	Operating Temperature	-40°C to 85°C
Actuation Force	160 ± 50gF 200 ± 50gF 260 ± 50gF	Storage Temperature	-40°C to 85°C
Actuator Travel	.28mm +.20mm / -.10mm	Sealing Degree	IP67
		Quantity per reel	4.3mm = 1K pieces per reel 5.0mm = 1K pieces per reel 7.3mm = 700 pieces per reel


Materials

Actuator	PA6T Nylon
Actuator Cover	Brass, Tin Plated
Switch Housing	PPS
Seal	Silicon, Rubber
Contacts	Stainless Steel, Silver Plated
Terminals	Copper Alloy, Silver Plated


Ordering Information

1. Series	STR	5.0	L	F200	Q	G
STR						
2. Actuator Height 4.3 = 4.3mm 5.0 = 5.0mm 7.3 = 7.3mm						
3. Contact Options L = Stainless Steel Dome						
4. Actuation Force F160 = 160gF F200 = 200gF F260 = 260gF						
5. Contact Material Q = Silver plated contacts						
6. Terminal Options G = Gull Wing						

Recommended Reflow Soldering Diagram

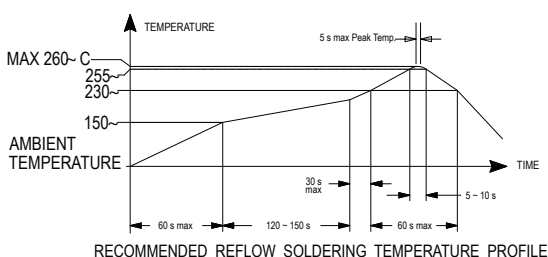

Dimensions

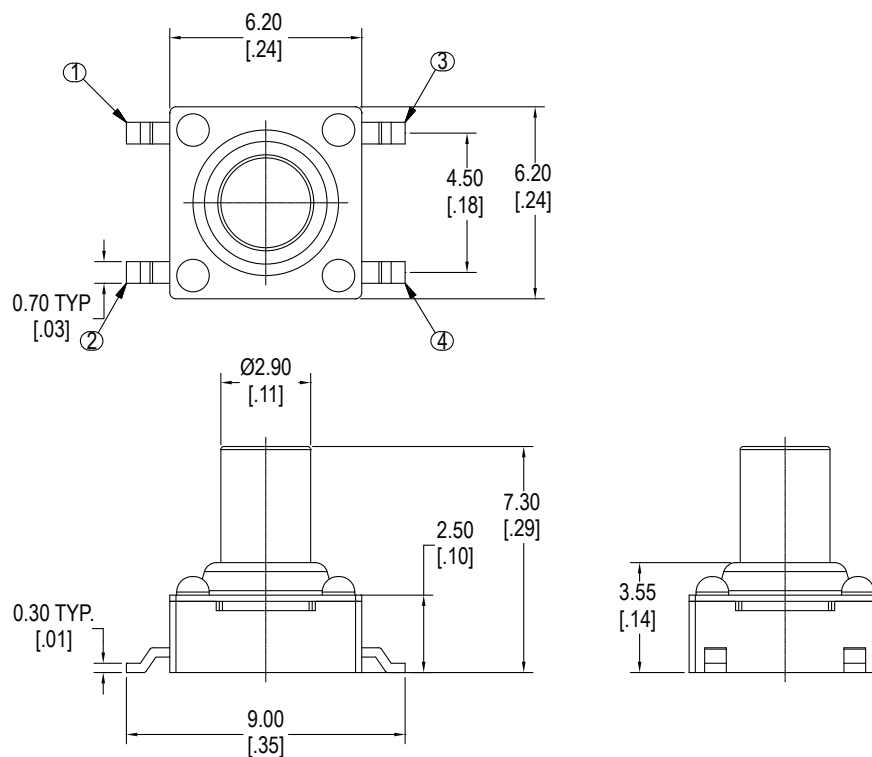

Schematic & PC Layout

