



# SERIES TL 2243 SWITCHES

## TACT SWITCHES - Dual

TACT SWITCHES

NAVIGATION SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

ROCKER SWITCHES

SLIDE SWITCHES

SNAP-ACTION SWITCHES

DIP SWITCHES

KEYLOCK SWITCHES

ROTARY SWITCHES

DETECTOR SWITCHES

CAP OPTIONS



### SPECIFICATIONS

Contact Rating:	50mA @ 12 VDC
Life Expectancy:	30,000 cycles
Contact Resistance:	100mΩ max.
Insulation Resistance:	100MΩ min. @ 100VDC
Dielectric Strength:	250VAC
Actuation Force:	180 ±50 gf
Operating Temperature:	-40 to 85 °C
Travel:	0.25 +0.2mm / -0.1mm

### FEATURES & BENEFITS


- ▶ Low profile
- ▶ Tactile feel
- ▶ Saves space on the PC Board

### APPLICATIONS/MARKETS

- ▶ Telecommunications
- ▶ Consumer Electronics
- ▶ Audio/visual
- ▶ Medical
- ▶ Testing/instrumentation
- ▶ Computer/servers/peripherals



### HOW TO ORDER





Example Ordering Number


TL-2243

Specifications subject to change without notice.

## TL 2243

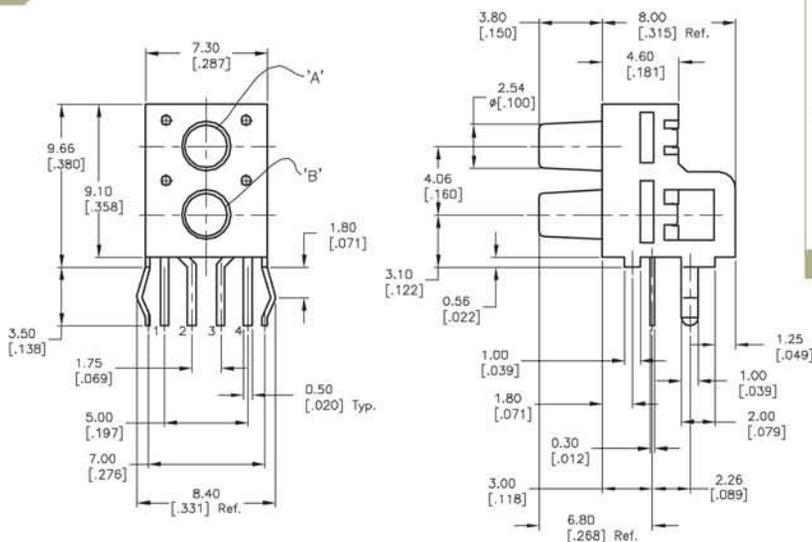

P.C. MOUNTING



SCHEMATIC