


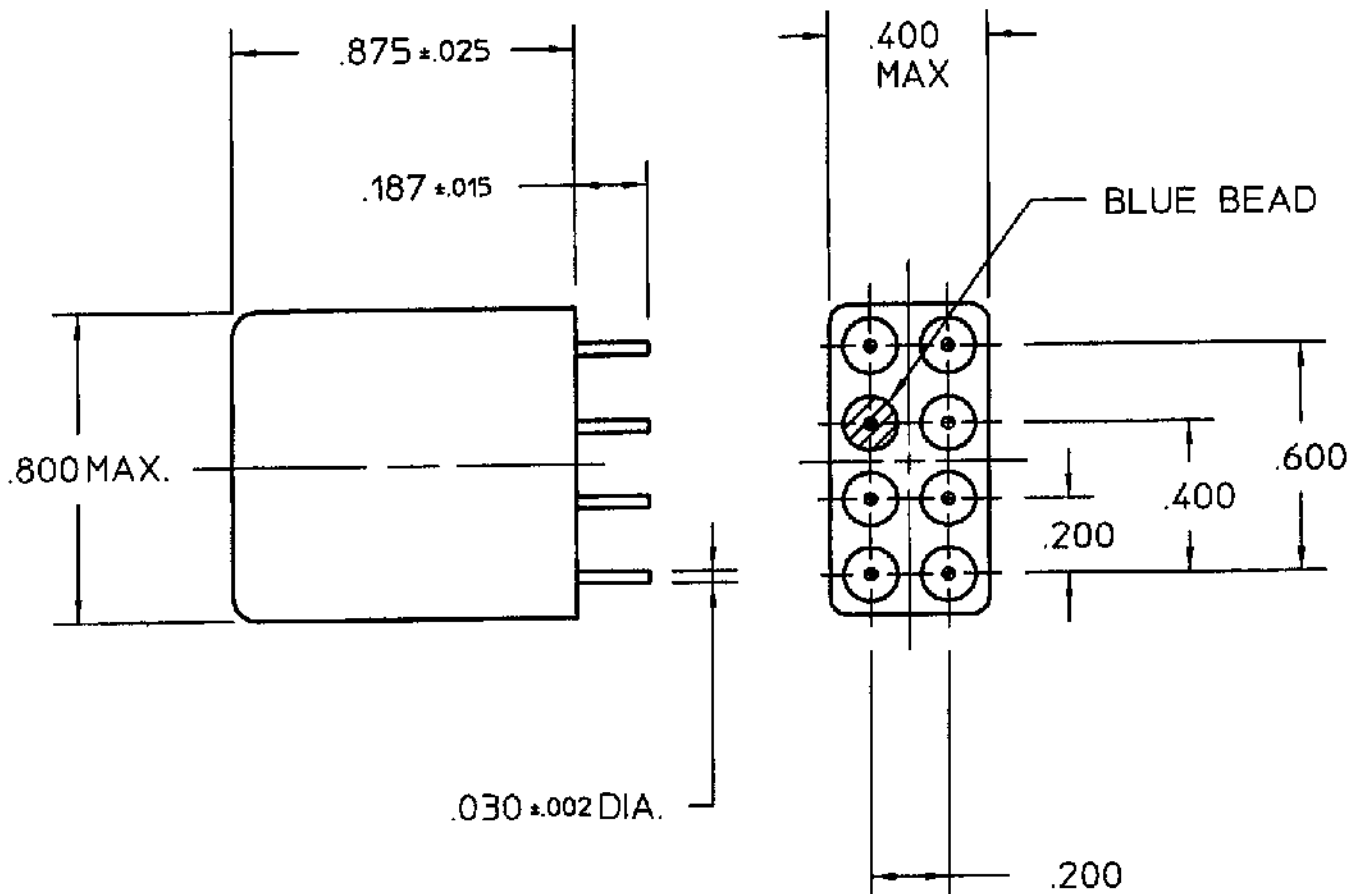

REV. 1
DCO 16356


COIL: @ 25°C
RESISTANCE 540 - 770 OHMS
NOMINAL VOLTAGE 26.5 VDC
MUST OPERATE 13.0 VDC
MUST RELEASE 10.1 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 15 g's
SHOCK 100 g's 6 ± 1 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 6 MS MAX.
CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

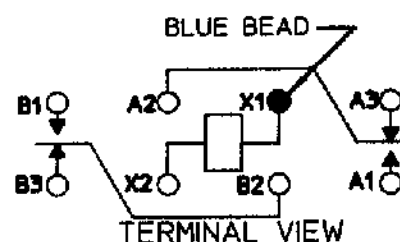

CONTACT RATING: 2A 28 VDC RESISTIVE 100,000
OPERATIONS MINIMUM

DR. PBB 5-5-00 CK. TLG 7-12-00

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M5757/10-054 REV.

"FW" RELAY

FW1201G03