


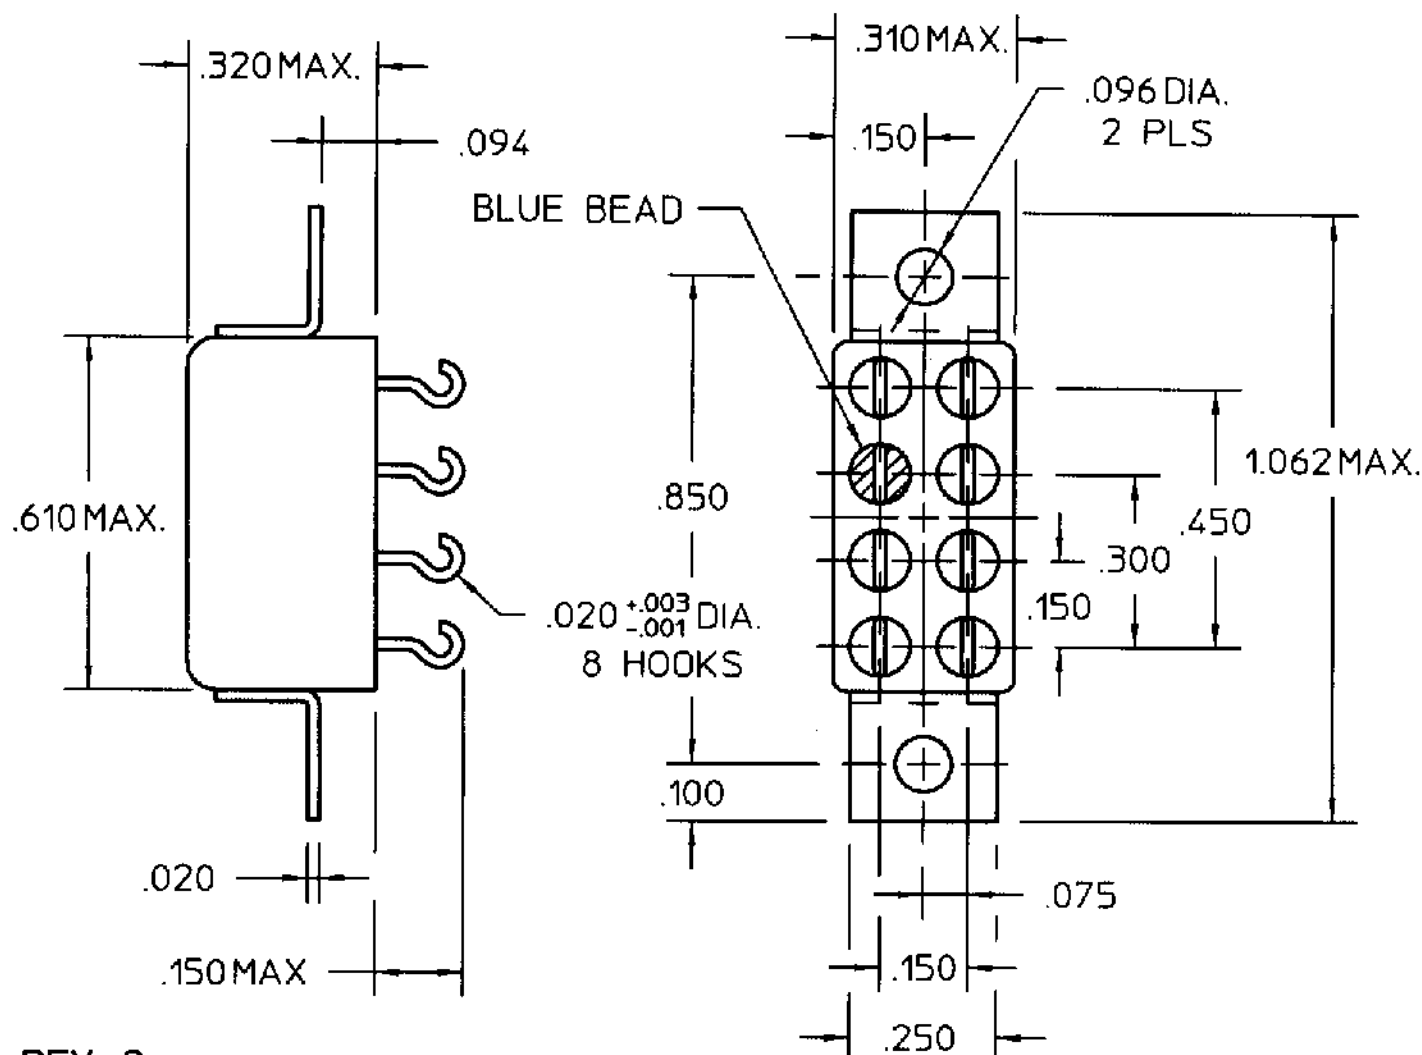

REV. 2

DCO 141326

TOL  $\pm$  .010 UNLESS OTHERWISE SPECIFIED


COIL: @ 25°C  
 RESISTANCE \_\_\_\_\_ 210 OHMS  $\pm$  10%  
 NOMINAL VOLTAGE \_\_\_\_\_ 12.0 VDC  
 MUST OPERATE \_\_\_\_\_ 5.4 VDC  
 \_\_\_\_\_  
 MUST RELEASE \_\_\_\_\_ 3.2 VDC MAX, 0.6 VDC MIN.

ENVIRONMENT:

VIBRATION \_\_\_\_\_ 10 \_\_\_\_\_ CPS TO \_\_\_\_\_ 3000 \_\_\_\_\_ CPS @ \_\_\_\_\_ 30 \_\_\_\_\_ g's  
 SHOCK \_\_\_\_\_ 75 \_\_\_\_\_ g's \_\_\_\_\_ 6 \_\_\_\_\_ MS. DURATION  
 TEMPERATURE \_\_\_\_\_ -65 \_\_\_\_\_ °C TO \_\_\_\_\_ +125 \_\_\_\_\_ °C

NOTES: \_\_\_\_\_ OPERATE & RELEASE 4 MS MAX.  
 \_\_\_\_\_ CONTACT STABILIZATION 2.5 MS MAX.  
 \_\_\_\_\_  
 \_\_\_\_\_

CUSTOMER DATA SHEET

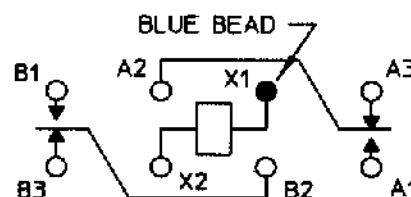

TERMINAL VIEW

CONTACT RATING: \_\_\_\_\_ LOW LEVEL TO  
 \_\_\_\_\_ 2 AMPS 28 VDC RESISTIVE  
 \_\_\_\_\_ 50,000 OPERATIONS

DR. \_\_\_\_\_ R.B. 1/21/97 \_\_\_\_\_ CK. GGH 9/20/99

**COMMUNICATIONS**  
**INSTRUMENTS, INC.**

CUST. \_\_\_\_\_ QPL  
 CUST. NO. \_\_\_\_\_ M39016/13-065M REV. \_\_\_\_\_

'3SBC' RELAY

3SBC1526A2