


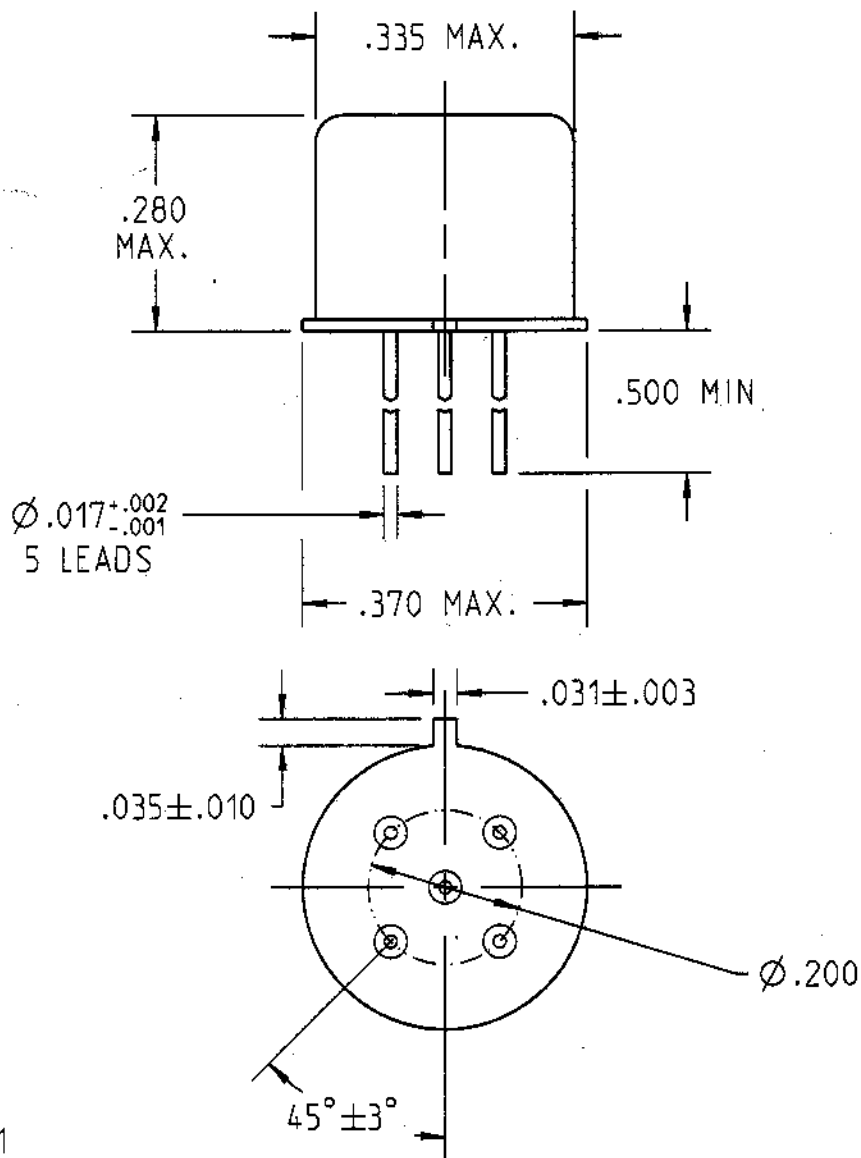

REV. 0


DCO 143541

COIL: @ 25°C
 RESISTANCE 63 OHMS $\pm 10\%$
 NOMINAL VOLTAGE 5.0 VDC
 MUST OPERATE 2.8 VDC
 MUST RELEASE 1.7 VDC MAX., 0.23 VDC MIN.

ENVIRONMENT:
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.
 RELEASE TIME 4.0 MS MAX.
 CONTACT STABILIZATION 2.0 MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 06MAY02

5/6/02

CII Technologies
 advanced control electronic solutions

CUST. QPL
 CUST. NO. M39016/23-025P REV.

"J1MAD" RELAY

J1MACD-5XP