

K10P-11A15-6 ✓ ACTIVE

Potter & Brumfield | Potter & Brumfield K10

TE Internal #: 4-1393144-4

General Purpose Power Relay, AC, Monostable, 2 Form C DPDT-CO, 15 A Contact Rating, 6 VAC Coil Voltage, Potter & Brumfield K10

[View on TE.com >](#)



Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: **General Purpose Power Relay**

Coil Magnetic System: **Monostable**

Contact Arrangement: **2 Form C DPDT-CO**

Current Type: **AC**

Contact Current Rating: **15 A**

Features

Product Type Features

Relay & Contactor Type	General Purpose Power Relay
------------------------	-----------------------------

Configuration Features

Contact Number of Poles	2
Coil Special Features	UL Coil Insulation Class B
Contact Arrangement	2 Form C DPDT-CO

Electrical Characteristics

Contact Limiting Short-Time Current	10 A
Contact Limiting Making Current	10 A
Contact Limiting Continuous Current	10 A
Contact Limiting Breaking Current	10 A
Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Insulation Initial Dielectric Between Adjacent Contacts	1500 Vrms
Contact Switching Load (Min)	300mA @ 12V
Coil Resistance	11 Ω
Coil Power Rating AC	1.2 VA
Insulation Initial Resistance	1000 M Ω
Contact Current Rating	15 A
Coil Voltage Rating	6 VAC



Contact Voltage Rating	120 VAC
------------------------	---------

Insulation Initial Dielectric Between Contacts & Coil	1500 Vrms
---	-----------

Body Features

Product Weight	51 g[1.799 oz]
----------------	----------------

Enclosure Type	Dust Protected
----------------	----------------

Contact Features

Contact Material	Silver Cadmium Oxide
------------------	----------------------

Termination Features

Main Termination & Connection Type	Quick Connect Terminals
------------------------------------	-------------------------

Coil Termination & Connection Type	Quick Connect Terminals
------------------------------------	-------------------------

Mechanical Attachment

Product Mount Type	Panel & Socket Mount
--------------------	----------------------

Dimensions

Product Width	21.84 mm[.86 in]
---------------	------------------

Product Length	28.17 mm[1.109 in]
----------------	--------------------

Product Height	34.98 mm[1.37 in]
----------------	-------------------

Usage Conditions

Operating Temperature Range	-45 – 70 °C[-49 – 158 °F]
-----------------------------	---------------------------

Environmental Category of Protection	RTI
--------------------------------------	-----

Environmental Ambient Temperature (Max)	70 °C[158 °F]
---	---------------

Operation/Application

Coil Magnetic System	Monostable
----------------------	------------

Current Type	AC
--------------	----

Packaging Features

Packaging Method	Tray
------------------	------

Other

	>1.1 – ≤1.8 VA
--	----------------

Contact Current Class	>10 – ≤16 A
-----------------------	-------------

Height Class (Mechanical)	>33 – ≤45 mm[>1.299 – ≤1.772 in]
---------------------------	----------------------------------

Length Class (Mechanical)	>22 – ≤33 mm[>.866 – ≤1.299 in]
---------------------------	---------------------------------

Width Class (Mechanical)	>16 – ≤22 mm[>.63 – ≤.866 in]
--------------------------	-------------------------------



Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) SVHC > Threshold: Cadmium oxide (10% in 209023267) Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <p>TE Part # 1-1419106-9 27E487=SOCKET,K10,8,SCW,PHEN, SURF-MNT</p>	 <p>TE Part # 2-1419106-7 27E895=SOCKET,K10,8,QC,POLY, DINRAIL</p>	 <p>TE Part # 2-1419106-1 27E489=SOCKET,K10,8,PCB,NYL</p>	 <p>TE Part # 2-1419106-0 27E488=SOCKET,K10,8,QC.187,NYL</p>
---	---	--	---

Also in the Series | Potter & Brumfield K10



AC Relays(7)




DC Relays(11)



Electromechanical Relays(18)



Plug-In Relays(14)

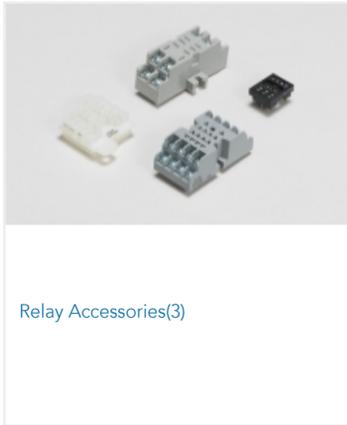

Relay Accessories(3)

Customers Also Bought



TE Part #33458
TERMINAL,SOLIS R 12-10 1/4



TE Part #34105
SOLIS R 22-16 COMM 22-18 MIL 6



TE Part #8-34105-1
SOLIS R 22-16 COMM 22-18 MIL 6



TE Part #35184
TERMINAL,SOLIS R 2 3/8



TE Part #35185
TERMINAL,SOLIS R 2 1/2



TE Part #36195
SOLIS SPD 22-16COMM 22-18MIL 6



TE Part #6-1393238-8
RTD14024



TE Part #2-1419106-1
27E489=SOCKET,K10,8,PCB,NYL



TE Part #6-1437652-7
6PCV-04-006=6PCV ASSEMBLY



TE Part #6609042-2
6VS1=F7247 S0

Documents



CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_4-1393144-4_B.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_4-1393144-4_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_4-1393144-4_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

K10 Series Miniature Relay

English

Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

UL

English