



PUIaudio




Data Sheet

SMT-0927-S-14-R


Specifications

Parameters	Values	Units
Rated Voltage	3.6	V0-pk
Operating Voltage Range	2.5 ~ 4.5	V0-pk
Current Draw at Rated Voltage	45 (Max.)	mA
Coil Resistance	52 ± 3.5	Ohms
Minimum SPL @ 10cm	87	dBA
Resonant Frequency	2,731	Hz
Weight	0.4	Grams
Moisture Sensitivity Level (MSL)	2	-
Environmental Compliances	RoHS/REACH	-
Storage Temperature	-40 ~ 85	°C
Operating Temperature	-40 ~ 85	°C


Measurement Method (Temp: 5 ~ 35 °C; Humidity: 45 ~ 85%; Atmosphere: 860 ~ 1060hPa)

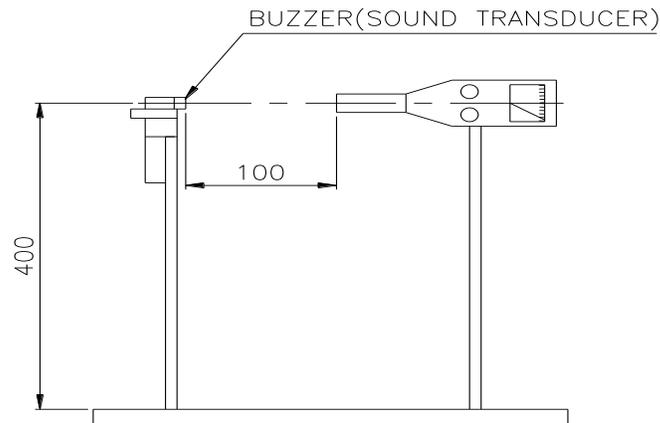

Typical Frequency Response

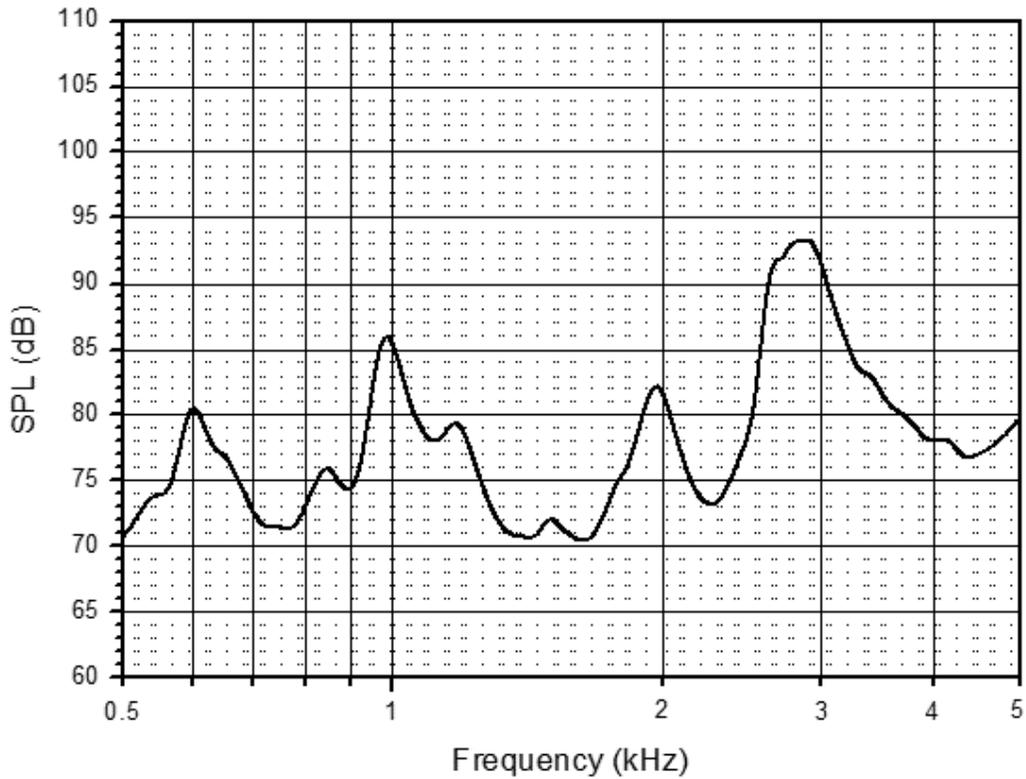

Recommended Land Pattern

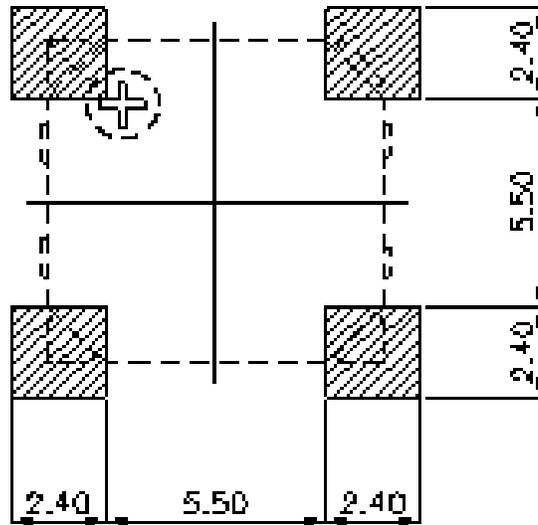


Reliability Testing

Type of Test	Test Specifications
High Temperature Test	96 hours at 85°C
Low Temperature Test	96 hours at -40°C
Humidity Test	12 hours at 60°C with relative humidity at 95%
Temperature Cycle Testing	<p>Run the test for 5 cycles, with each cycle consisting of:</p> <p>1 cycle : 90 min</p>
Vibration Test	<p>Make this test for the directions of X, Y and Z. for 2 hours each (total 6 hours).</p>
Drop Test	Fix transducer on PCB with polyester film(t=0.2mm, gross weight: 100g) and the height of 120cm on each of the six surfaces 3 times each.




After reliability test, let rest for 2 hours before testing.

Dimensions

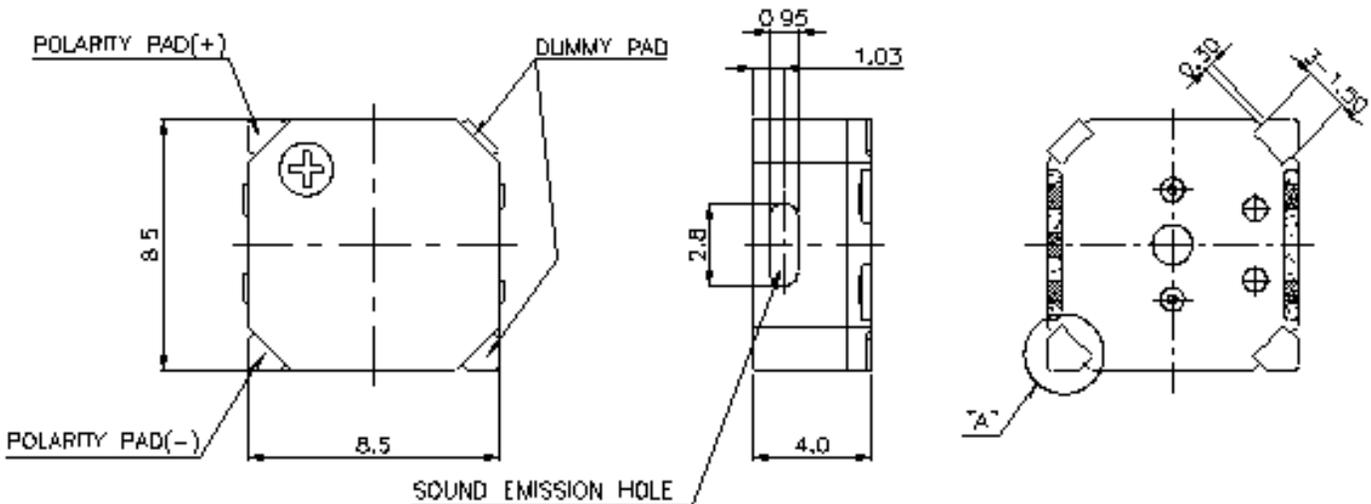


Tolerance: $\pm 0.2\text{mm}$


Packaging

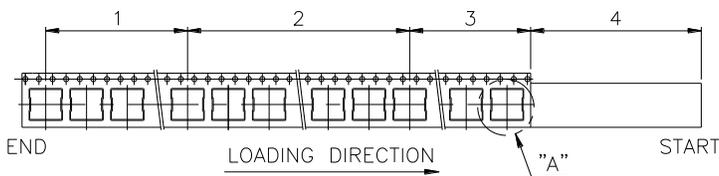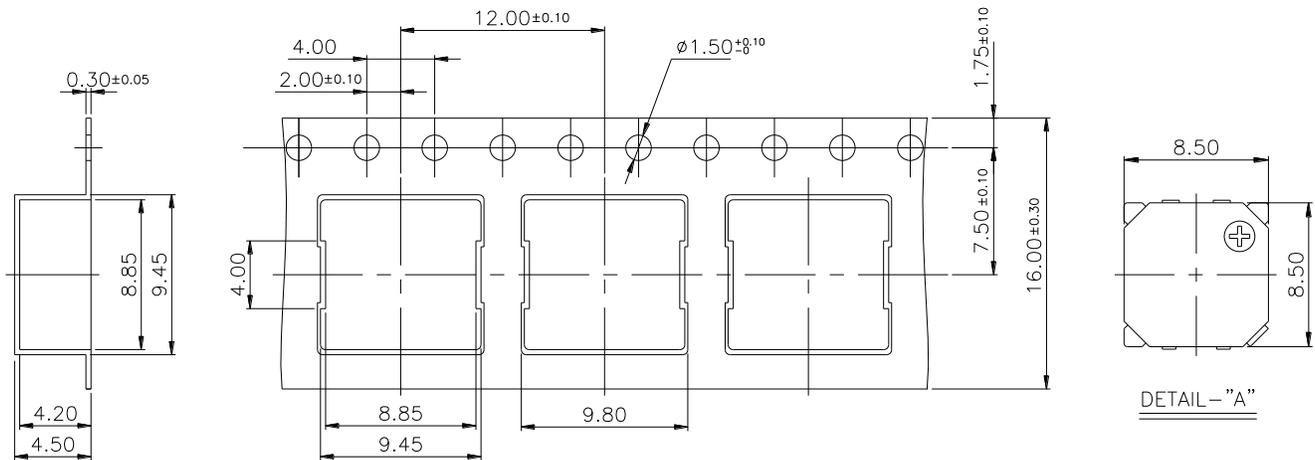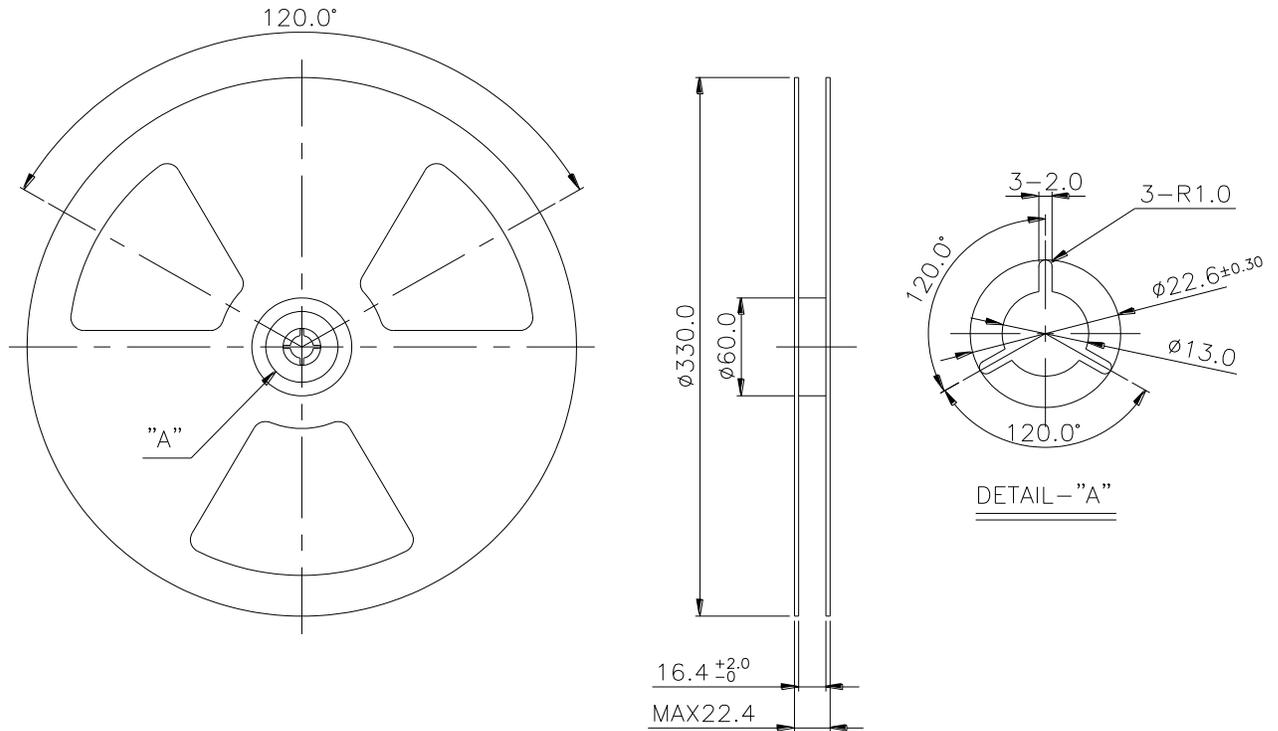


1. BARE EMBOSS AREA : 400mm OVER(35PCS OVER)
2. CHIP MOUNT AREA : 1,000PCS
3. BARE EMBOSS AREA : 400mmOVER(35PCS OVER)
4. LEADER AREA : 100mm OVER

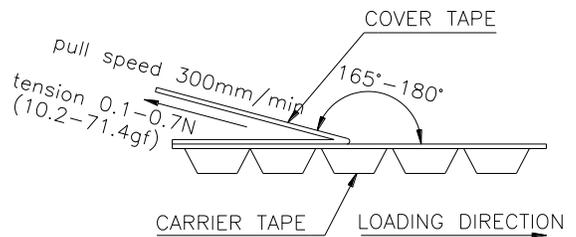

1,000 PCS per 1roll by using the tapping M/C.

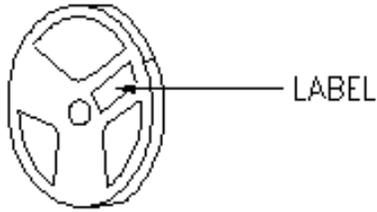

2rolls or 5rolls per 1 double(thick) carton box packed by polypropylene tape.

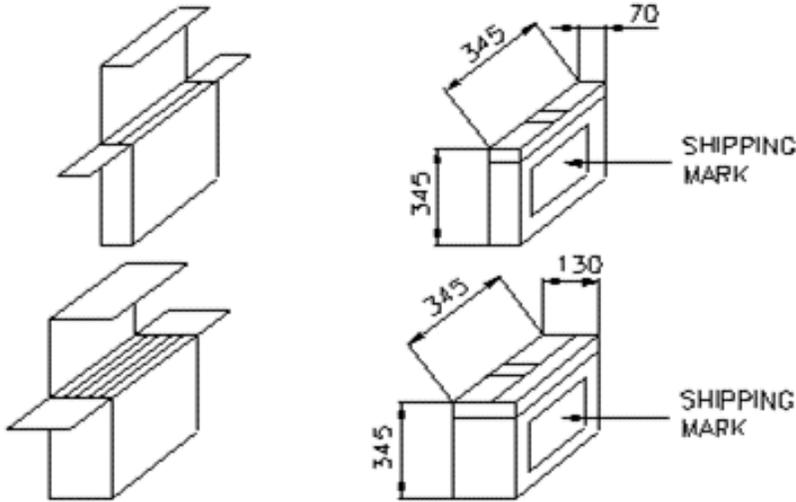

Specifications Revisions

Revision	Description	Date	Approved
A	Released from Engineering	07/25/2022	-
B	Updated Operating Temperature	04/18/2023	-
C	Add details for Packaging, MSL 2	02/24/2025	ML

Note:

1. Unless otherwise specified:
 - A. All dimensions are in millimeters.
 - B. Default tolerances are $\pm 0.5\text{mm}$ and angles are $\pm 3^\circ$.
2. Specifications subject to change or withdrawal without notice.