

# Product data sheet

Specifications



Electronic alarm, Harmony XVS,  
black, PNP, mounting support DIN  
72, 0...90dB, 16tones, 4 channels,  
12...24V DC

XVS72BMBP

Product availability: Stock - Normally stocked in distribution facility

## Main

Range of Product	Harmony XVS
Product or Component Type	Electronic alarm
Device short name	XVS

## Complementary

Color	Black
Material	ABS (acrylonitrile butadiene-styrene): body PC (polycarbonate): terminal cover
Marking	CE
Overvoltage category	Class II conforming to IEC 61140
Mounting Support	72 mm DIN rail
[Us] rated supply voltage	12...24 V DC
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	117 mA 12 V 125 mA 24 V 158 mA 12 V 200 mA 24 V
Clamping Connection Capacity	$\leq 1 \times 1.5 \text{ mm}^2$
Width	2.8 in (72 mm)
Height	2.8 in (72 mm)
Depth	2.7 in (69.3 mm)
Product Weight	0.40 lb(US) (0.18 kg)

## Environment

Discrete output type	PNP
Signalling type	16 tones alarm
Standards	UL 464 IEC 61000-6-3 IEC 61000-6-2
Product Certifications	UR
Protective treatment	TC
Ambient Air Temperature for Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature for Operation	14...122 °F (-10...50 °C)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>IP degree of protection</b>	Panel mounted IP54 IEC 60529
<b>Noise level</b>	0...90 dB continuous or intermittent tone)1 m

## Ordering and shipping details

<b>Category</b>	US100XV22617
<b>Discount Schedule</b>	00XV
<b>GTIN</b>	3606480032905
<b>Returnability</b>	Yes
<b>Country of origin</b>	ID

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Nbr. of units in pkg.</b>	1
<b>Package 1 Height</b>	4.13 in (10.500 cm)
<b>Package 1 Width</b>	3.74 in (9.500 cm)
<b>Package 1 Length</b>	3.74 in (9.500 cm)
<b>Package weight(Lbs)</b>	9.453 oz (268.000 g)
<b>Unit Type of Package 2</b>	S03
<b>Number of Units in Package 2</b>	16
<b>Package 2 Height</b>	11.81 in (30.000 cm)
<b>Package 2 Width</b>	11.81 in (30.000 cm)
<b>Package 2 Length</b>	15.75 in (40.000 cm)
<b>Package 2 Weight</b>	11.385 lb(US) (5.164 kg)

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	7
--	---

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
--	-----

Packaging without single use plastic	Yes
--------------------------------------	-----

<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)
-----------------------------------	--

SCIP Number	Fe0ee3ab-dd49-4abe-bd8e-c49754e2c442
-------------	--------------------------------------

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
---------------------------	---

## Use Again

### Repack and remanufacture


Take-back	No
-----------	----

Dimensions Drawings

Electronic Alarm

---

Dimensions

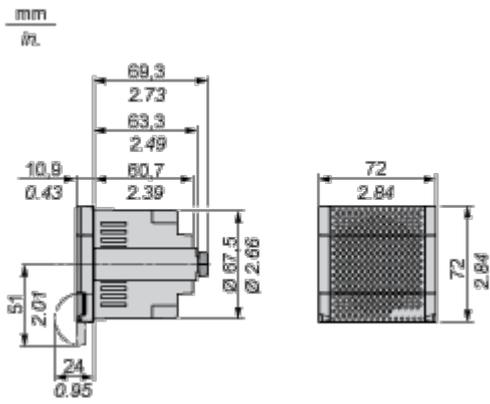

Technical Illustration

Dimensions

---

