


PXF4053CAA Datasheet

Product Name // 01 M, Multimode, Cabled, Rear panel mount fiber connector

 [View Product Page](#)

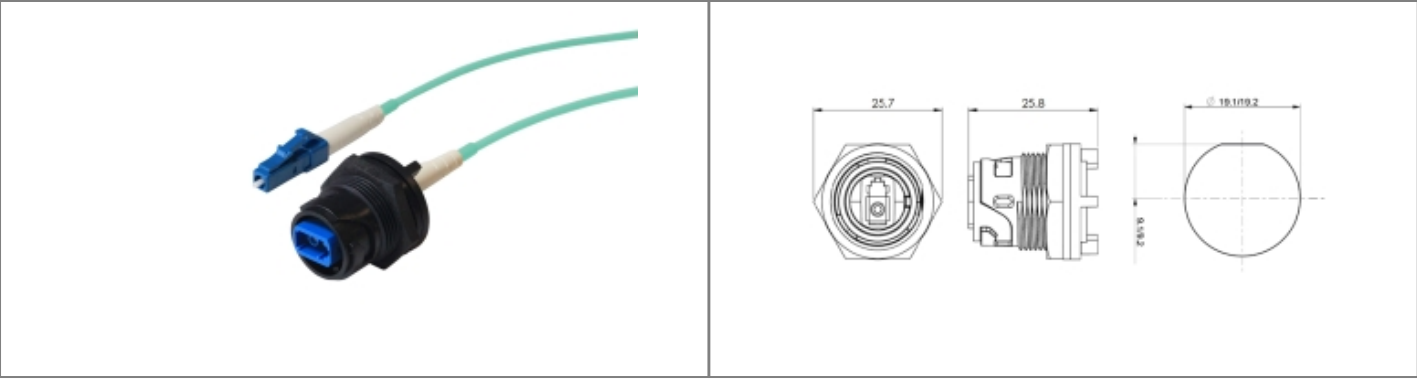

// Product Description:

- ⬢ Rear Panel Mount Fiber Connector to LC type Connector
- ⬢ Sealed to IP66, IP68, IP69K when mated with compatible connector
- ⬢ no cable options, or pre-terminated 1M available
- ⬢ Simplex LC type fiber connector
- ⬢ Choices of OS1, OM1 and OM3 cables for single or multimode
- ⬢ PXP4083 Sealing Cap available separately to maintain IP rating of unmated connectors
- ⬢ Mate with flex fiber connector PXF4050

// General Information:

Product Display Title:	Rear Panel Mount Fiber Connector to LC type Connector
Product Family:	Circular Fiber Connectors
Product Series:	4000 Series - Simplex LC Fiber Buccaneer
Body Material:	Polycarbonate/Polybutylene Terephthalate (PC/PBT)
Contact Type:	LC Fiber
Coupling Type:	30 Degree coupling
Diameter Over Coupling Ring Mm:	19.7mm
Fibre Mode:	OM3
Flamability Rating:	UL94V-0
Function:	Rear Panel Mount to LC Connector Double Ended Fiber Cable
Ip Rating:	IP66, IP68, IP69K
Max Operating Temperature:	+70°C
Min Operating Temperature:	-20°C

// Product PDF Links

 [4000 Series Fiber connectors...](#)

// Product 3D CAD Model Links

 [PXF4053CAA3D CAD Model](#)



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)