


# PXF4054AAB Datasheet

**Product Name // 10 M, Single Mode, Cabled, Flex fiber connector**

 [View Product Page](#)

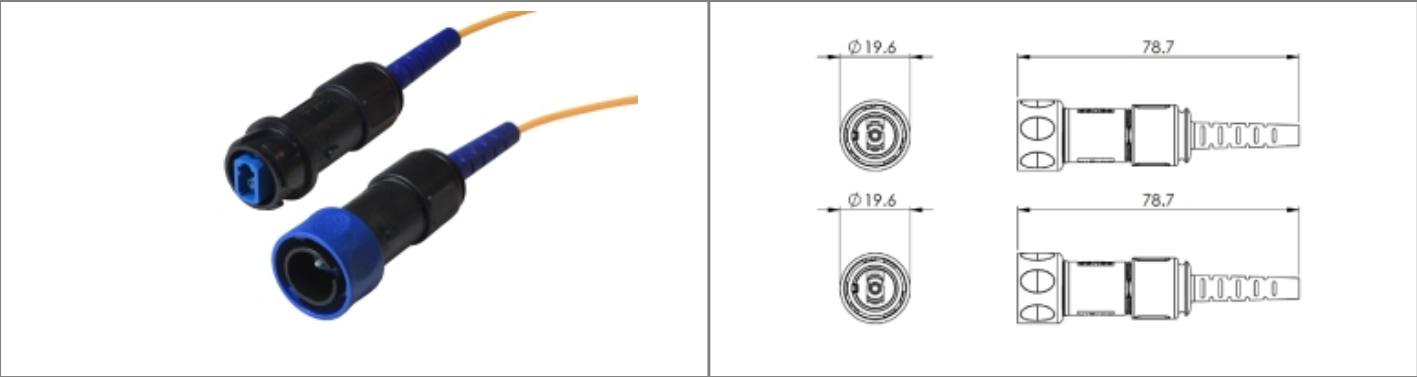

// Product Description:

Flex Fiber Connector to Inline Fiber Connector

Sealed to IP66, IP68, IP69K when mated with compatible connector

no cable options, or pre-terminated from 5M - 450M available

Simplex LC type fiber connector

Choices of OS1, OM1 and OM3 cables for single or multimode

PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors

Mate with Inline fiber connector or panel mount connectors PXF4051, PXF4053

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Material:

Contact Type:

Coupling Type:

Diameter Over Coupling Ring Mm:

Fibre Mode:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature:

Min Operating Temperature:

Flex Fiber Connector to Inline Fiber Connector

Circular Fiber Connectors

4000 Series - Simplex LC Fiber Buccaneer

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

LC Fiber

30 Degree coupling

19.7mm

OS1

UL94V-0

Flex to LC Connector Double Ended Fiber Cable

IP66, IP68, IP69K

+70°C

-20°C

// Product PDF Links

 4000 Series Fiber connectors...

// Product 3D CAD Model Links

 PXF4054AAB3D CAD Model

 Have a question or project enquiry you'd like to talk to us about?

 [Click Here To Contact Us](#)

Bulgin Datasheets

1