


PXF6052AAA Datasheet

Product Name // 01 M, OM3 Multi Mode, Cabled, Rear panel mount fiber connector

 [View Product Page](#)

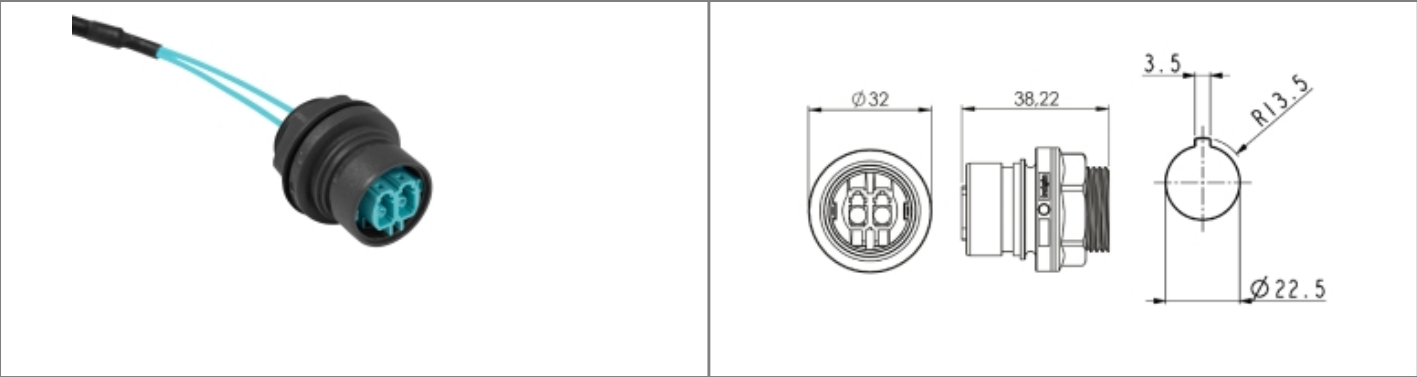

// Product Description:	
 Rear Panel Mount Fiber Connector to LC type connector	 Choices of OS1, OM1 and OM3 cables for single or multimode
 Sealed to IP66, IP68, IP69K when mated with compatible connector	 PXP6081 Sealing Cap available separately to maintain IP rating of unmated connectors
 no cable options, or pre-terminated 1M available	 Mate with flex fiber connector PXF6050
 Duplex LC type fiber connector	

// General Information:	
Product Display Title:	Rear Panel Mount Fiber Connector to LC type Connector
Product Family:	Circular Fiber Connectors
Product Series:	6000 Series - Duplex LC Fiber Buccaneer
Body Material:	Polyamide (PA)
Contact Type:	LC Fiber
Coupling Type:	30 Degree coupling
Diameter Over Coupling Ring Mm:	32mm
Fibre Mode:	OM3
Flamability Rating:	UL94V-0
Function:	Rear Panel Mount to Double LC Connector Double Ended Fiber Cable
Ip Rating:	IP66, IP68, IP69K
Max Operating Temperature:	+70°C
Min Operating Temperature:	-25°C

// Product PDF Links

 6000 Series Fiber connectors...

// Product 3D CAD Model Links

 PXF6052AAA3D CAD Model