



MICROWAVE PRECISION

# Fixed Attenuator


## YAT-4A+

Mini-Circuits

50Ω 1.7 W 4 dB DC to 18 GHz

### THE BIG DEAL

- Exceptional Power Handling
- Wide Bandwidth, DC to 18 GHz
- Miniature Package MCLP™ 2 x 2 mm
- Excellent Attenuation Accuracy & Flatness



Generic photo used for illustration purposes only

CASE STYLE: MC1630

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

### APPLICATIONS

- Cellular
- PCS
- Communications
- Radar
- Defense

### PRODUCT OVERVIEW

YAT-4A+ (RoHS compliant) is a fixed value, absorptive MMIC attenuator fabricated using highly repetitive IPD process technology with thin film resistors on GaAs substrates. This design incorporates through-wafer metallization vias to realize low thermal resistance and wideband operation with outstanding attenuation accuracy and flatness over its full operating bandwidth. **YAT-A** family attenuators are available with nominal attenuation values of 0 to 10 dB (in 1 dB steps), 12, 15, 20, and 30 dB. Packaged in a tiny 2 x 2 mm MCLP™ package, it's ideal for tight spaces in crowded board layouts. Also available in die form (YAT-4A-DG+).

### KEY FEATURES

| Feature  | Advantages   |
|--|--|
| Wideband Operation, DC to 18 GHz   | Supports a wide array of applications including wireless cellular, microwave communications, satellite, defense and aerospace, medical broadband and optic applications.   |
| Small Size and Simple to Use (2 x 2 mm)  | As a single chip solution, the YAT-A series occupies less board space than a "T" or "Pi" pad configuration, and ensures repeatable performance over wide frequency ranges. |
| High Power, Up to 1.7 W  | High power handling in a small size package.   |
| Wide Range of Nominal Attenuation Values 0 to 10 dB (in 1 dB steps), and 12, 15, 20, and 30 dB | Small increment offering enables circuit designer to change attenuation values without motherboard redesign making the YAT-A series ideal for select at test application.  |
| MCLP™ Package  | Low Inductance, repeatable transitions, excellent thermal path make the YAT-A series an ideal solution as an alternative to "do it yourself" resistor based attenuators.   |

REV. B  
ECO-024948  
YAT-4A+  
MCL NY  
250318





### ELECTRICAL SPECIFICATIONS<sup>1</sup> AT +25°C, 50Ω (CPW)

| Parameter       | Frequency (GHz) | Min. | Typ. | Max. | Unit |
|-----------------|-----------------|------|------|------|------|
| Frequency Range |                 | DC   |      | 18   | GHz  |
| Attenuation     | DC - 5          | 3.5  | 3.92 | 4.3  | dB   |
|                 | 5 - 15          | 3.6  | 3.98 | 4.4  |      |
|                 | 15 - 18         | 3.6  | 4.07 | 4.6  |      |
| VSWR            | DC - 5          |      | 1.12 | 1.32 | :1   |
|                 | 5 - 15          |      | 1.16 | 1.90 |      |
|                 | 15 - 18         |      | 1.29 | 1.96 |      |

1. Tested on Mini-Circuits test board TB-YAT-4A+ using coplanar wave guide (CPW) input and output traces (see suggested PCB layout on page 3 of this data sheet).

### ABSOLUTE MAXIMUM RATINGS<sup>2</sup>

| Parameter                               | Ratings         |
|---|-----------------|
| Operating Case Temperature <sup>3</sup> | -40°C to +85°C  |
| Storage Temperature                     | -65°C to +150°C |
| RF Input Power <sup>4</sup>             | 1.7 W           |


2. Permanent damage may occur if any of these limits are exceeded.

3. Case is defined as ground lead.

4. RF Power at +25°C case temperature: 1.7 Watt. Derate linearly to 1.0 W at +85°C.

### PAD DESCRIPTION

| Function | Pad Number                 | Description                    |
|----------|----------------------------|--------------------------------|
| RF-IN    | 2                          | RF input pad                   |
| RF-OUT   | 5                          | RF output pad                  |
| GND      | 1,3,4,6 Bottom Exposed Pad | Connected to ground externally |

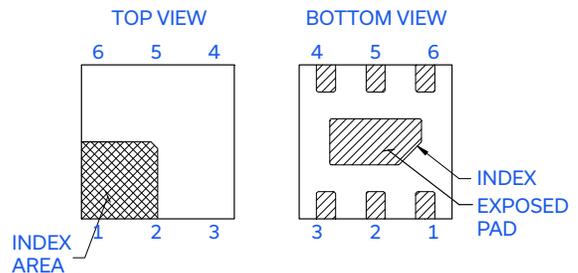

### CHARACTERIZATION TEST CIRCUIT

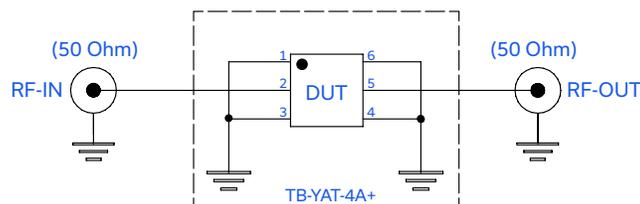


Fig 1. Block diagram of Test Circuit used for characterization, Test board TB-YAT-4A+ Conditions: Attenuation, VSWR: P<sub>IN</sub>=-10 dBm



MICROWAVE PRECISION


# Fixed Attenuator

## YAT-4A+

Mini-Circuits

50Ω 1.7 W 4 dB DC to 18 GHz

### SUGGESTED PCB LAYOUT (PL-586)

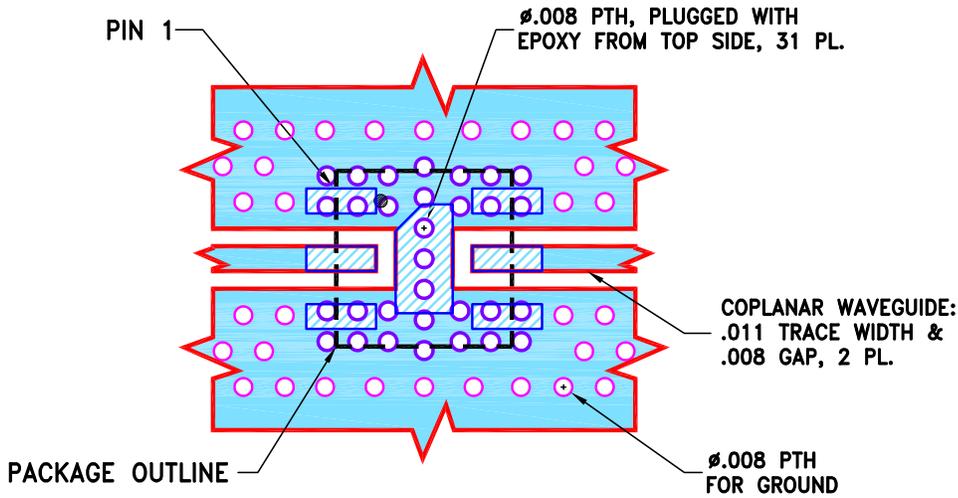


### NOTES:

1. TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS  $.0066 \pm .0007$ . COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
-  DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

### PRODUCT MARKING

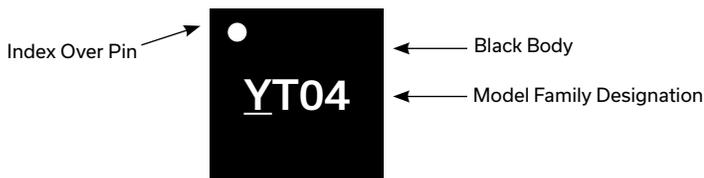

Marking may contain other features or characters for internal lot control.

Mini-Circuits



MICROWAVE PRECISION

# Fixed Attenuator



## YAT-4A+

Mini-Circuits

50Ω 1.7 W 4 dB DC to 18 GHz

### TYPICAL PERFORMANCE DATA AT +25°C

| Frequency (GHz) | Attenuation (dB) | VSWR (:1) |
|-----------------|------------------|-----------|
| 0.010           | 3.89             | 1.15      |
| 1.0             | 3.93             | 1.11      |
| 2.0             | 3.94             | 1.12      |
| 4.0             | 3.93             | 1.09      |
| 5.0             | 3.92             | 1.10      |
| 8.0             | 3.97             | 1.19      |
| 10.0            | 4.01             | 1.19      |
| 12.0            | 4.07             | 1.28      |
| 15.0            | 4.09             | 1.30      |
| 16.0            | 4.09             | 1.30      |
| 18.0            | 4.14             | 1.38      |

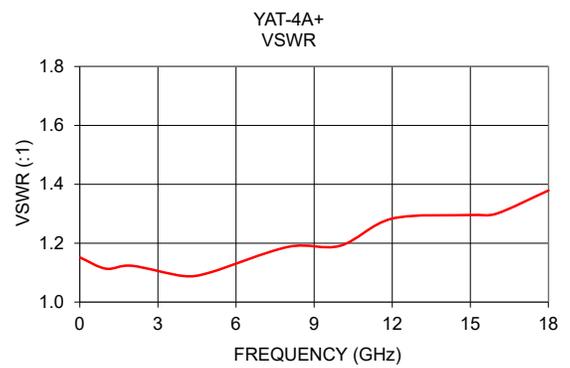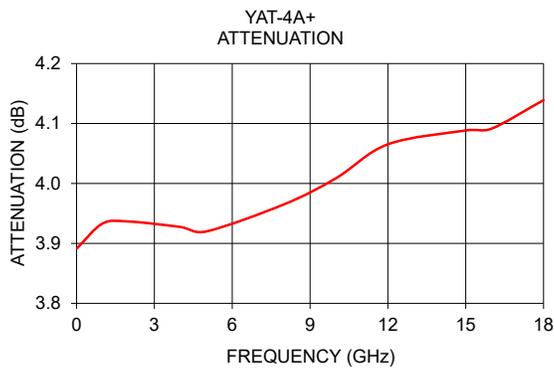



MICROWAVE PRECISION

# Fixed Attenuator

## YAT-4A+

Mini-Circuits

50Ω 1.7 W 4 dB DC to 18 GHz

ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASHBOARD. [CLICK HERE](#)

|  |  |
|--|--|
| Performance Data                                     | Data Table<br>Swept Graphs   |
| Case Style   | MC1630 Plastic package, Terminal finish: Matte Tin Plate           |
| Tape & Reel<br>Standard Quantities Available on Reel | F108<br>7" Reels with 20, 50, 100, 200, 500, 1K, 2K, or 3K devices |
| Suggested Layout for PCB Design                      | PL-586   |
| Evaluation Board                                     | TB-YAT-4A+   |
| Environmental Ratings                                | ENV08T1  |

### ESD RATING\*

|     | Class    | Voltage Range | Reference Standard          |
|-----|----------|---------------|-----------------------------|
| HBM | Class 2  | >2000 V       | ANSI/ESD STM 5.1-2001       |
| CDM | Class C3 | >1000 V       | ANSI/ESDA/JEDEC JS-002-2022 |

\* Tested in industry standard 2x2 mm, 6-lead MCLP package

### MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

