



[www.opledtw.com](http://www.opledtw.com)

**Opto Plus LED Corp.**  
**0.30" SMD Type LED Display**  
**OPS-D3050SE-ST-1.5 | OPS-D3051SE-ST-1.5**

● **EDIT HISTORY**

Version A: Jun. 15, 2024

Preliminary Spec.

Confidential Document



**Opto Plus LED Corp.**  
**0.30” SMD Type LED Display**  
**OPS-D3050SE-ST-1.5 | OPS-D3051SE-ST-1.5**

● **FEATURES**

- 0.30 inch (7.62 mm) Digit Height.
- Low current operation.
- Excellent character appearance.
- Super thin SMD type.
- RoHS compliant, Pb Free.

● **DESCRIPTION**

The device are 0.30 inch (7.62 mm) height dual digit 7-segment displays.  
 The device is Opto Plus LED Corp standard LED Display.  
 This device utilizes Super Bright Red LED chip which are made from AlGaInP  
 On a transparent GaAs, substrate.  
 The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

● **DEVICE**

PART NO.	DESCRIPTION
OPS-D3050SE-ST-1.5-GW	Common Anode   Gray face   White segment
OPS-D3051SE-ST-1.5-GW	Common Cathode   Gray face   White segment
OPS-D3050SE-ST-1.5-BW	Common Anode   Black face   White segment
OPS-D3051SE-ST-1.5-BW	Common Cathode   Black face   White segment

**RoHS Compliance**




**Pb Free.**





**Opto Plus LED Corp.**  
**0.30" SMD Type LED Display**  
**OPS-D3050SE-ST-1.5 | OPS-D3051SE-ST-1.5**

● **MECHANICAL DIMENSIONS**

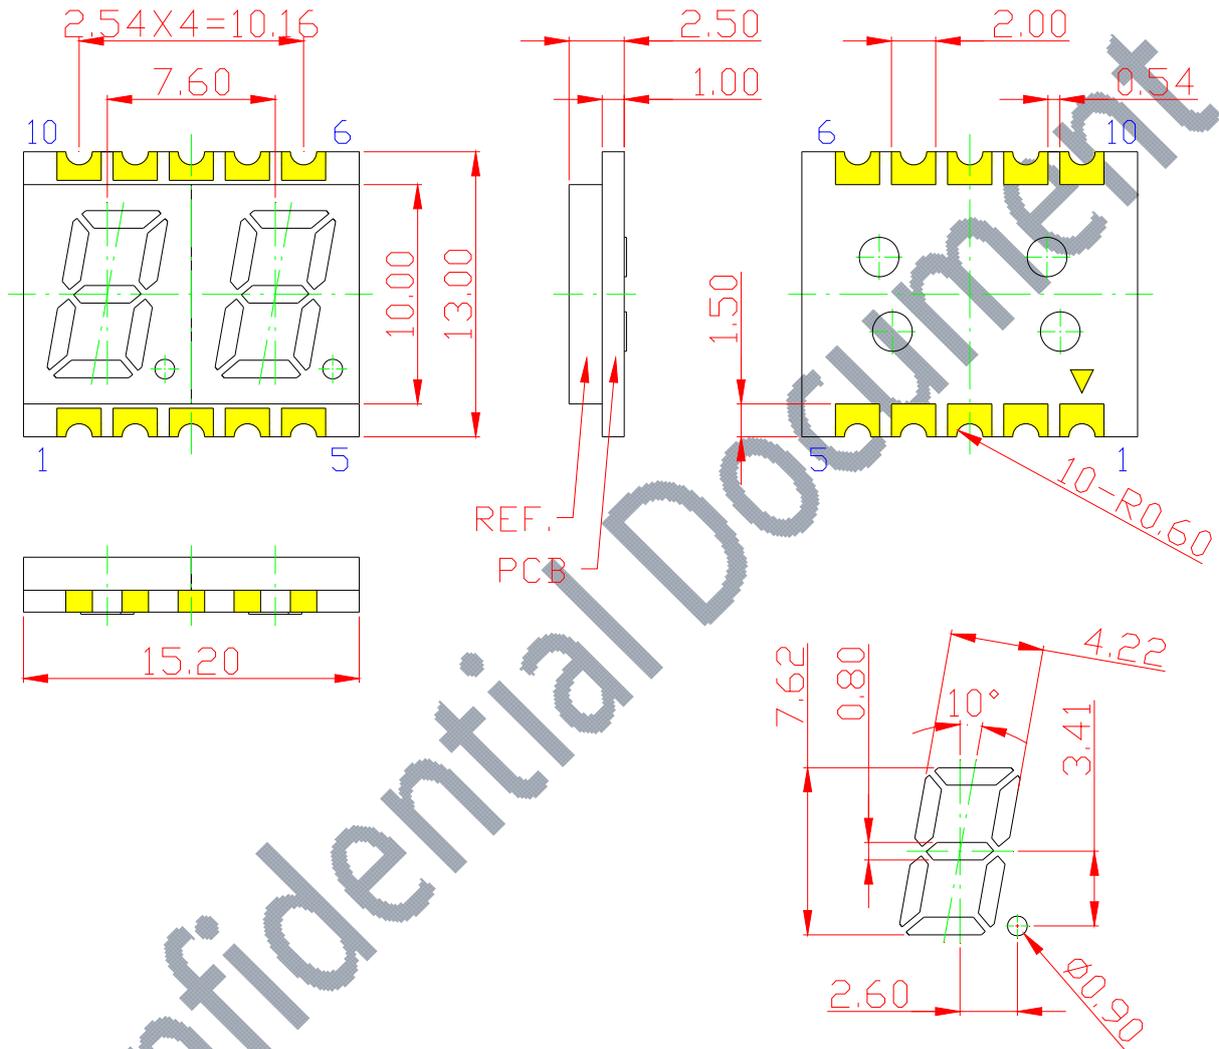

NOTES: All dimensions are in millimeters. Tolerances are  $\pm 0.25$  mm unless otherwise noted.




# Opto Plus LED Corp.

## 0.30'' SMD Type LED Display


### OPS-D3050SE-ST-1.5 | OPS-D3051SE-ST-1.5

#### ● TYPICAL INTERNAL EQUIVALENT CIRCUIT

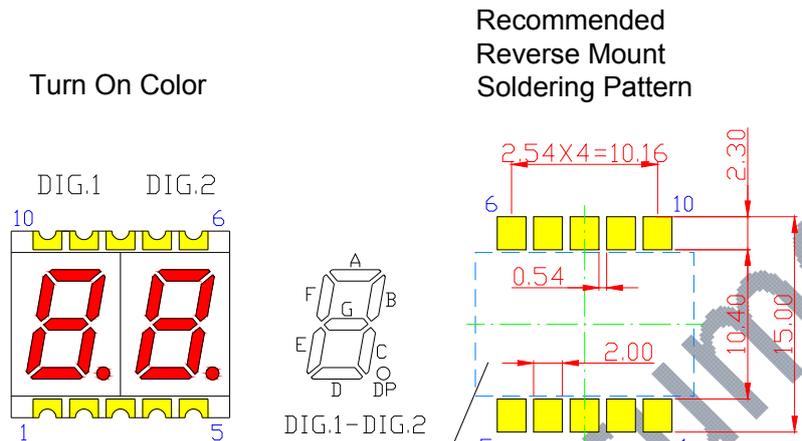


Recommended  
Reverse Mount  
Soldering Pattern


Turn On Color



Reflector  
(Mounting Hole)

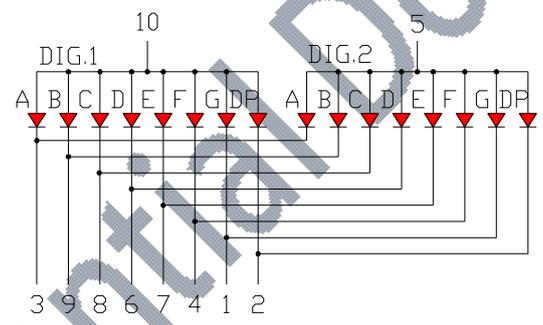

OPS-D3050SE-ST-1.5 (Common Anode)

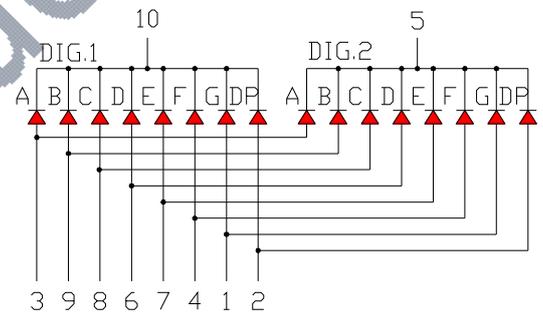

OPS-D3051SE-ST-1.5 (Common Cathode)

※EMITTED COLOR : SUPER BRIGHT RED



**Opto Plus LED Corp.**  
**0.30'' SMD Type LED Display**  
**OPS-D3050SE-ST-1.5 | OPS-D3051SE-ST-1.5**

● **PRODUCT APPEARANCE**

The most common reflector color and segment color are show in below diagram.

-GW	-BW
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit [www.opledtw.com](http://www.opledtw.com) or contact [sales@opledtw.com](mailto:sales@opledtw.com) for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-D3050SE-ST-1.5-GW	Common Anode   Gray face   White segment
OPS-D3051SE-ST-1.5-GW	Common Cathode   Gray face   White segment
OPS-D3050SE-ST-1.5-BW	Common Anode   Black face   White segment
OPS-D3051SE-ST-1.5-BW	Common Cathode   Black face   White segment



**Opto Plus LED Corp.**  
**0.30'' SMD Type LED Display**  
**OPS-D3050SE-ST-1.5 | OPS-D3051SE-ST-1.5**

● **SE: SUPER BRIGHT RED (AlGaInP/GaAs)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P <sub>AD</sub>	48	mW
Continuous forward current	I <sub>AF</sub>	20	mA
Peak current (duty cycle 1/10, 1kHz)	I <sub>PF</sub>	40	mA
Reverse voltage	V <sub>R</sub>	5	V
Operating temperature	T <sub>OPR</sub>	-40 to +105	°C
Storage temperature	T <sub>STG</sub>	-40 to +105	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	V <sub>F</sub>	I <sub>F</sub> = 20mA	-	2.1	2.4	V
Reverse Current, (Per Dice)	I <sub>R</sub>	V <sub>R</sub> = 5V	-	-	10	μA
Peak Wavelength	λ <sub>P</sub>	I <sub>F</sub> = 20mA	-	632	-	nm
Dominant Wavelength	λ <sub>D</sub>	I <sub>F</sub> = 20mA	619	-	629	nm
Luminous Intensity	I <sub>V</sub>	I <sub>F</sub> = 20mA	20	-	65	mcd
Spectral Line Half-Bandwidth	Δλ	I <sub>F</sub> = 20mA	-	20	-	nm



**Opto Plus LED Corp.**  
**0.30" SMD Type LED Display**  
**OPS-D3050SE-ST-1.5 | OPS-D3051SE-ST-1.5**

● SE: BIN GRADE (Unit :mcd) 20mA

<b>Super Bright Red</b>	<b>J</b>	<b>K</b>	<b>L</b>
	20.0 - 35.0	35.1 - 50.0	50.1 - 65.0

● SE: HUE GRADE ( $\lambda D$  : nm)

<b>1</b>	<b>2</b>	<b>3</b>
619.0 – 622.0	622.1 – 626.0	626.1 – 629.0

● AVAILABLE BIN / HUE TABLE

J1	J2	J3
K1	K2	K3
L1	L2	L3



# Opto Plus LED Corp.

## 0.30'' SMD Type LED Display

### OPS-D3050SE-ST-1.5 | OPS-D3051SE-ST-1.5

#### ● SE: SUPER BRIGHT RED (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves  
(25 °C Free Air Temperature Unless Otherwise Specified)

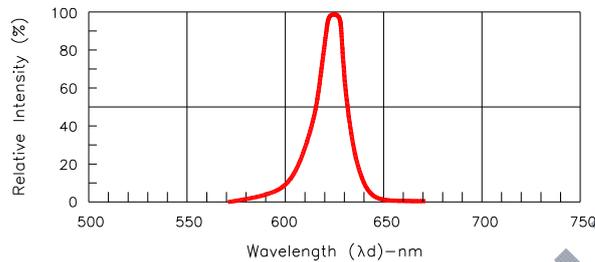


Fig.1-Relative Intensity VS. Wavelength

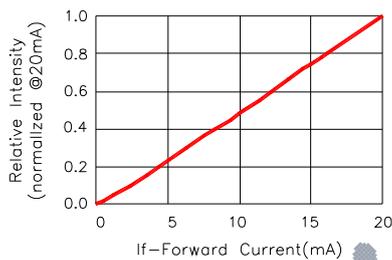


Fig.2-Relative Luminous Intensity vs. Forward Current

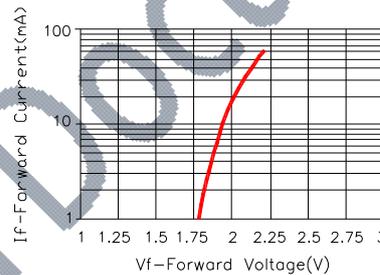


Fig.3-Forward Current vs. Forward Voltage

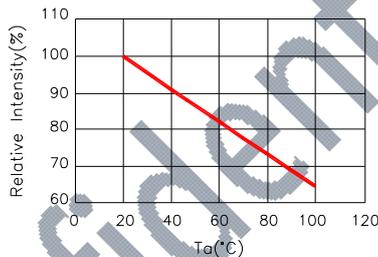


Fig.4-Relative Intensity(@20mA) vs. Ambient Temperature

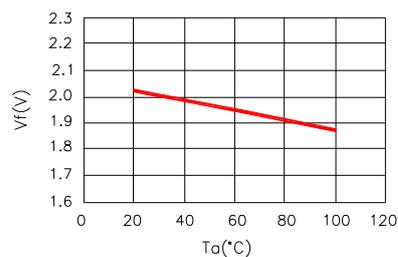


Fig.5-Forward Voltage(@20mA) vs. Ambient Temperature

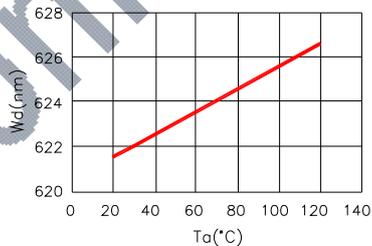


Fig.6-Dominant Wavelength(@20mA) VS. Ambient Temperature

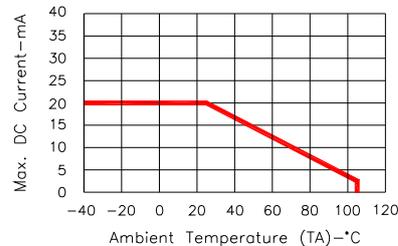


Fig.7-Max. Allowable DC Current VS. Ambient Temperature



# Opto Plus LED Corp.


## 0.30" SMD Type LED Display

### OPS-D3050SE-ST-1.5 | OPS-D3051SE-ST-1.5

#### ● SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile

Pb free reflow soldering Profile

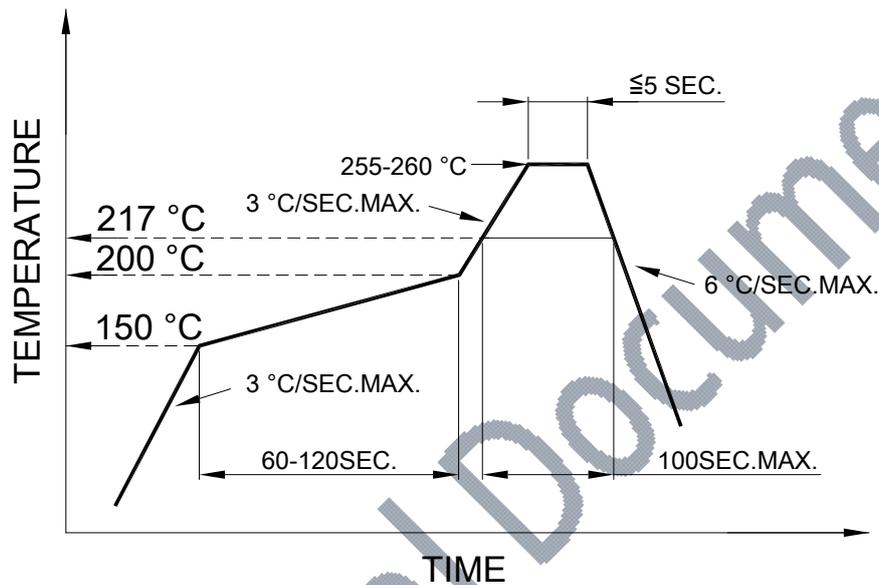

- We recommend the reflow temperature 245°C (+/- 5°C).  
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

#### ● SOLDERING IRON

Basic spec is  $\leq 4$  sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

#### ● REWORK

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.