



**Opto Plus LED Corp.**  
**0.56" SMD Type LED Display**  
**OPS-D5620SB | OPS-D5621SB**

● **EDIT HISTORY**

Version A: Dec. 01, 2020

Preliminary Spec.

Version B: Oct. 23, 2023

1. Modify electrical optical characteristics.
2. Modify bin grade data & available bin / hue table.



# Opto Plus LED Corp.

## 0.56" SMD Type LED Display

### OPS-D5620SB | OPS-D5621SB

#### ● FEATURES

- 0.56 inch (14.20 mm) digit height.
- SMD type.
- Low current operation.
- RoHS Compliant, Pb Free.

#### ● DESCRIPTION

The device are 0.56 inch (14.20 mm) height dual digit 7-segment displays.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright Blue LED chip which are made from InGaN

On a transparent GaN, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

#### ● DEVICE

PART NO.	DESCRIPTION
OPS-D5620SB-GW	Common Anode   Gray face   White segment
OPS-D5621SB-GW	Common Cathode   Gray face   White segment
OPS-D5620SB-BW	Common Anode   Black face   White segment
OPS-D5621SB-BW	Common Cathode   Black face   White segment

**RoHS Compliance**



**Pb Free.**






# Opto Plus LED Corp.

## 0.56" SMD Type LED Display

### OPS-D5620SB | OPS-D5621SB

#### ● MECHANICAL DIMENSIONS

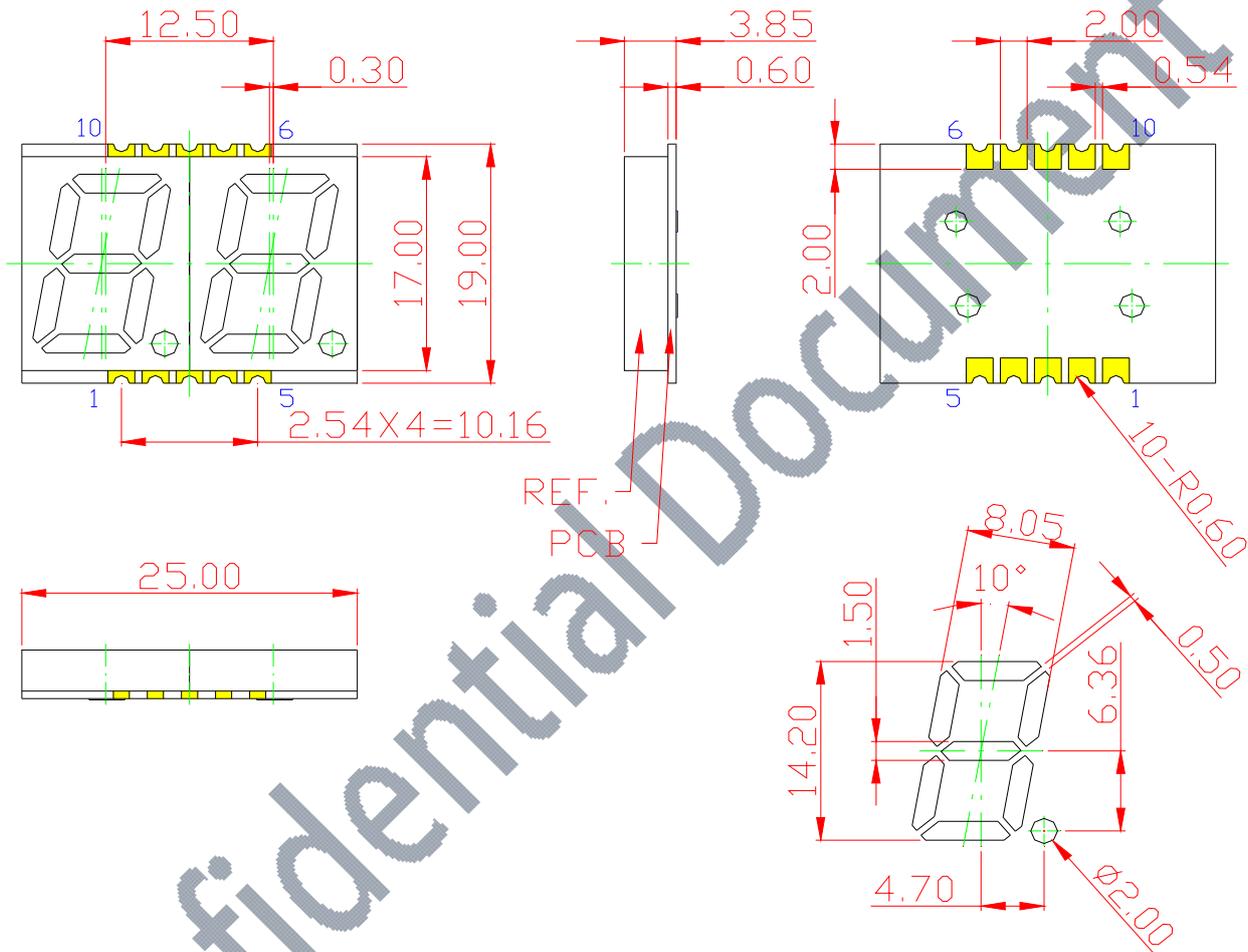

NOTES: All dimensions are in millimeters. Tolerances are  $\pm 0.25$  mm unless otherwise noted.




# Opto Plus LED Corp.

## 0.56" SMD Type LED Display

### OPS-D5620SB | OPS-D5621SB

#### ● TYPICAL INTERNAL EQUIVALENT CIRCUIT

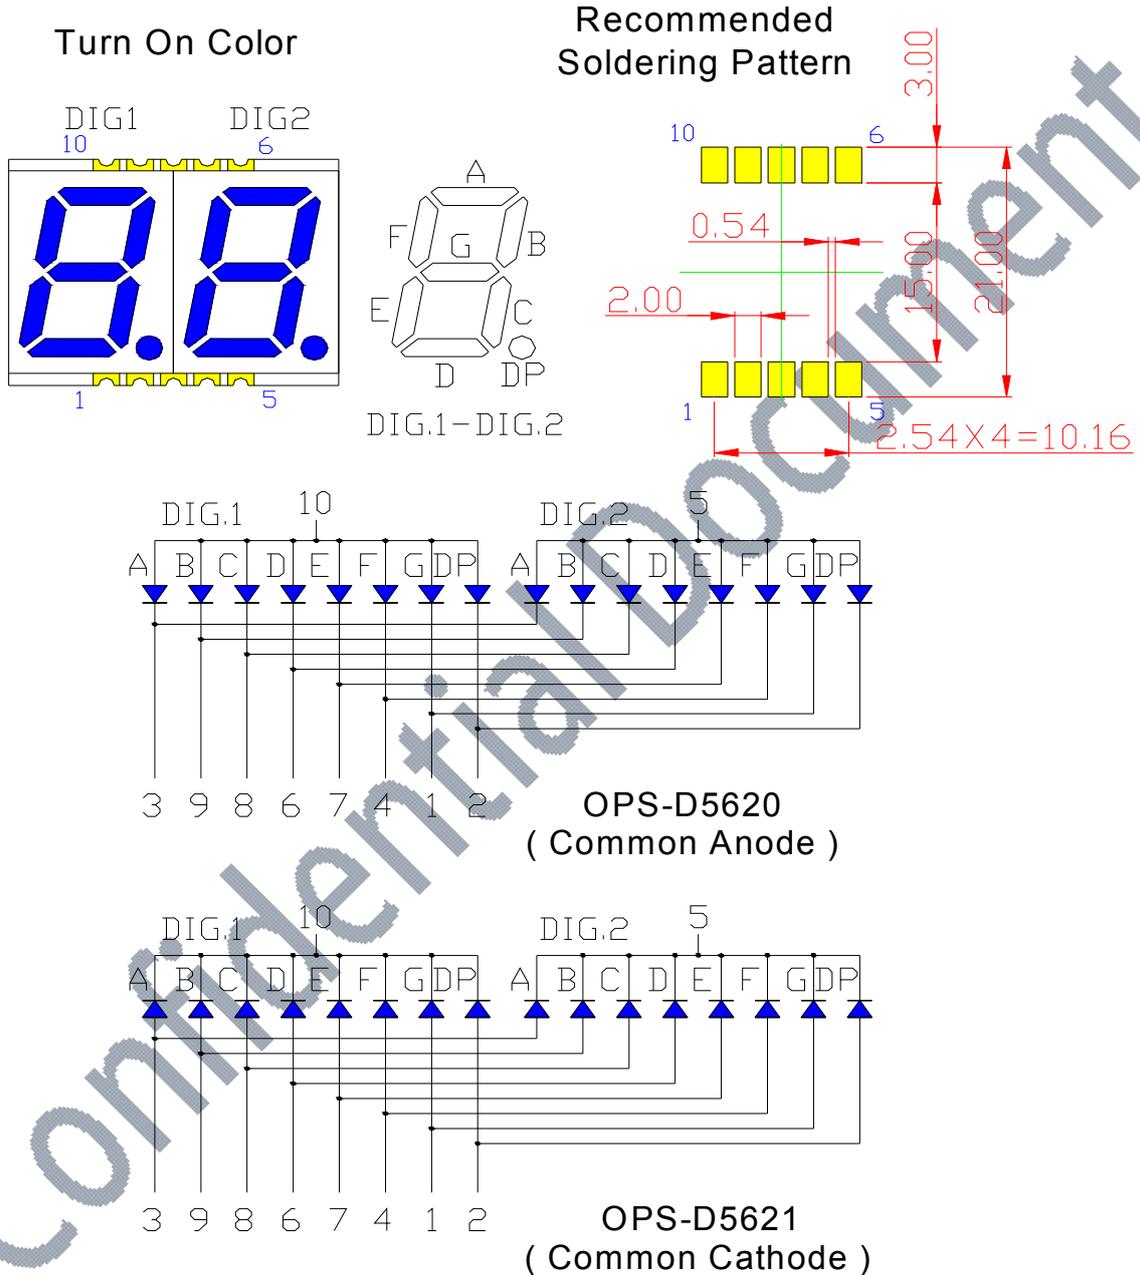

※EMITTED COLOR : SUPER BRIGHT BLUE




# Opto Plus LED Corp.

## 0.56'' SMD Type LED Display

### OPS-D5620SB | OPS-D5621SB

#### ● PRODUCT APPEARANCE

The most common reflector color and segment color are show in below diagram.

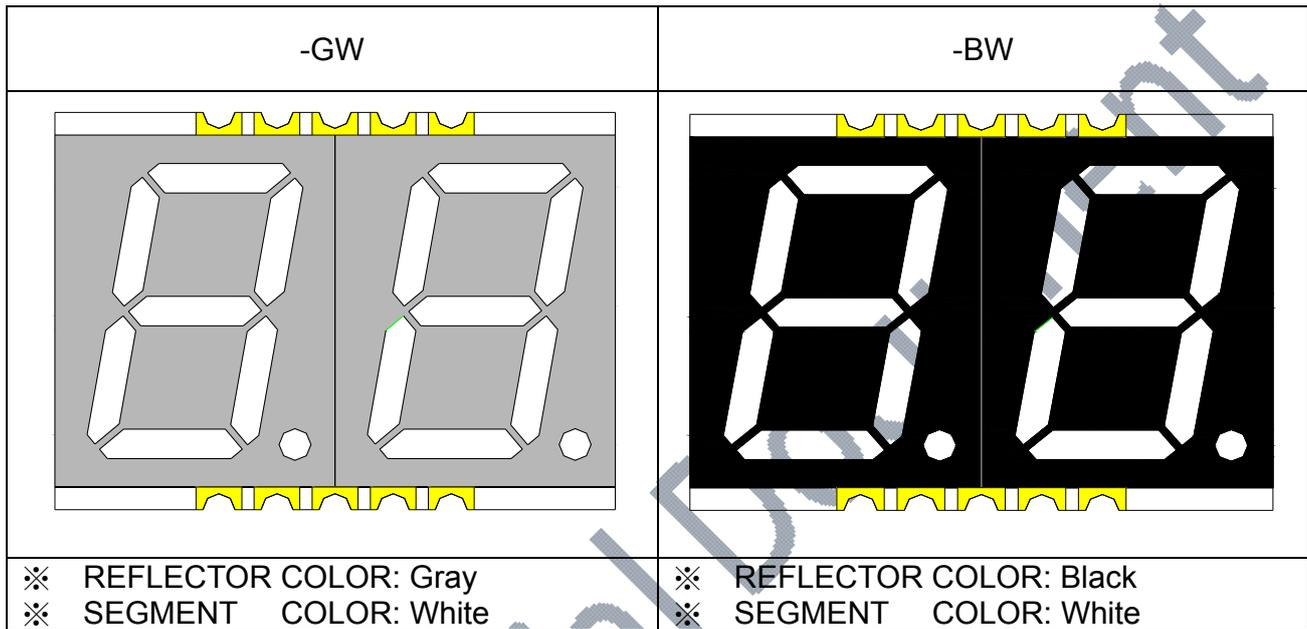

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit [www.opledtw.com](http://www.opledtw.com) or contact [sales@opledtw.com](mailto:sales@opledtw.com) for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-D5620SB-GW	Common Anode   Gray face   White segment
OPS-D5621SB-GW	Common Cathode   Gray face   White segment
OPS-D5620SB-BW	Common Anode   Black face   White segment
OPS-D5621SB-BW	Common Cathode   Black face   White segment



**Opto Plus LED Corp.**  
**0.56'' SMD Type LED Display**  
**OPS-D5620SB | OPS-D5621SB**

● **SB: SUPER BRIGHT BLUE (InGaN/GaN)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	$P_{AD}$	90	mW
Continuous forward current	$I_{AF}$	30	mA
Peak current (duty cycle 1/10, 1kHz)	$I_{PF}$	60	mA
Reverse voltage	$V_R$	5	V
Operating temperature	$T_{OPR}$	-40 to +105	°C
Storage temperature	$T_{STG}$	-40 to +105	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	$V_F$	$I_F = 20\text{mA}$	-	3.0	3.4	V
Reverse Current, (Per Dice)	$I_R$	$V_R = 5\text{V}$	-	-	10	$\mu\text{A}$
Dominant Wavelength	$\lambda_D$	$I_F = 20\text{mA}$	464	-	474	nm
Luminous Intensity	$I_v$	$I_F = 20\text{mA}$	25	47	70	mcd
Spectral Line Half-Bandwidth	$\Delta\lambda$	$I_F = 20\text{mA}$	-	20	-	nm



**Opto Plus LED Corp.**  
**0.56" SMD Type LED Display**  
**OPS-D5620SB | OPS-D5621SB**

● **SB: BIN GRADE (Unit : mcd ) 20mA**

Super Bright Blue	L	M	N
	25.0 – 40.0	40.1 – 55.0	55.1 – 70.0

● **SB: HUE GRADE ( $\lambda_D$  : nm)**

1	2	3
464.0 - 467.0	467.1 - 470.0	470.1 - 474.0

● **AVAILABLE BIN / HUE TABLE**

L1	L2	L3
M1	M2	M3
N1	N2	N3



# Opto Plus LED Corp.

## 0.56" SMD Type LED Display

### OPS-D5620SB | OPS-D5621SB

#### ● SB: SUPER BRIGHT BLUE (InGaN/GaN) CURVE

Typical Electro-optical Characteristic Curves  
(25 °C Free Air Temperature Unless Otherwise Specified)

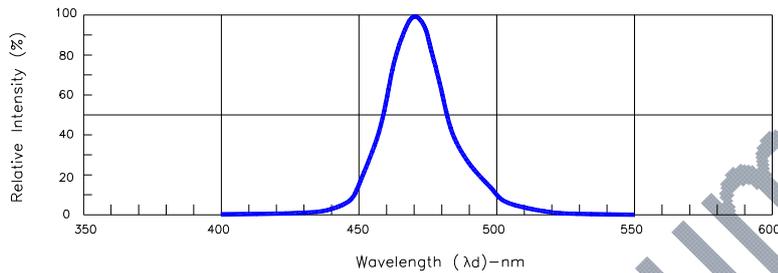


Fig.1-Relative Intensity VS. Wavelength

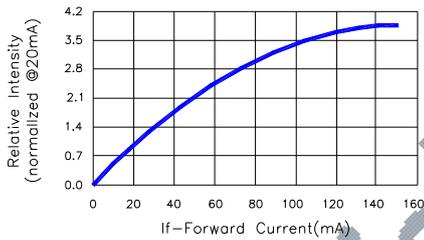


Fig.2-Relative Luminous Intensity vs. Forward Current

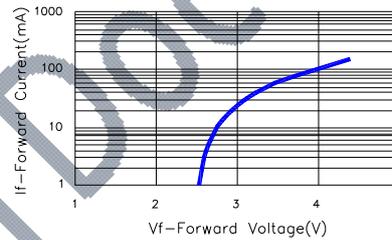


Fig.3-Forward Current vs. Forward Voltage

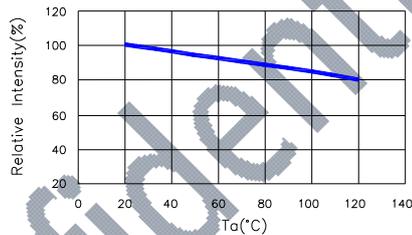


Fig.4-Relative Intensity(@20mA) VS. Ambient Temperature

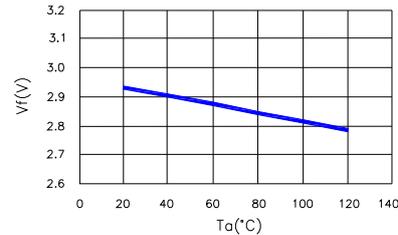


Fig.5-Forward Voltage(@20mA) VS. Ambient Temperature

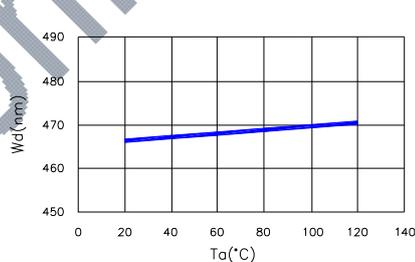


Fig.6-Dominant Wavelength(@20mA) VS. Ambient Temperature

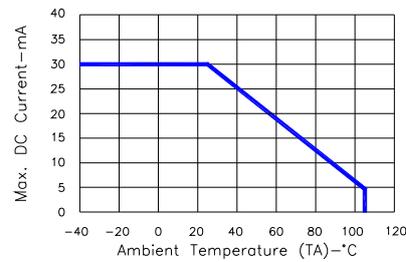


Fig.7-Max. Allowable DC Current VS. Ambient Temperature



# Opto Plus LED Corp.


## 0.56" SMD Type LED Display

### OPS-D5620SB | OPS-D5621SB

#### ● SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile

Pb free reflow soldering Profile

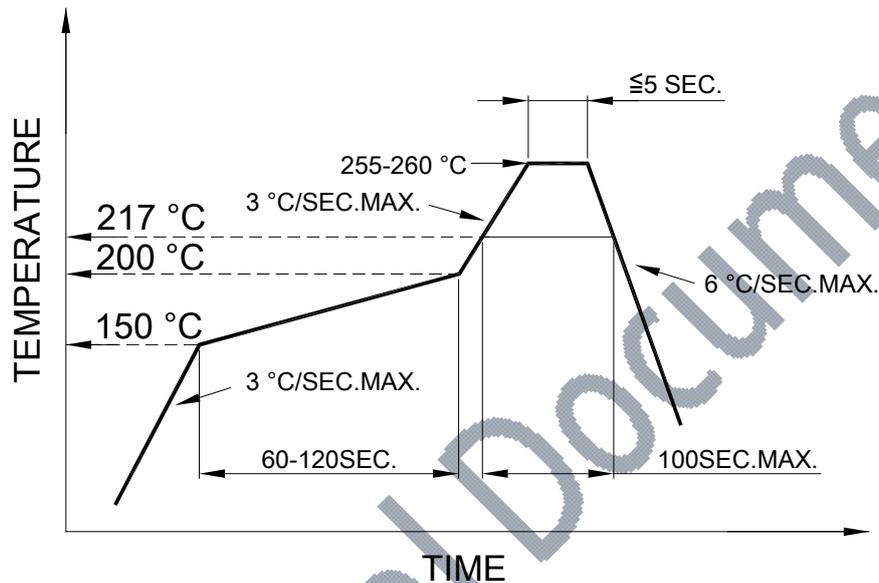

- We recommend the reflow temperature 245°C (+/- 5°C).  
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

#### ● SOLDERING IRON

Basic spec is  $\leq 4$  sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

#### ● REWORK

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.




# Opto Plus LED Corp.


## 0.56" SMD Type LED Display

### OPS-D5620SB | OPS-D5621SB

#### ● REEL DIMENSIONS

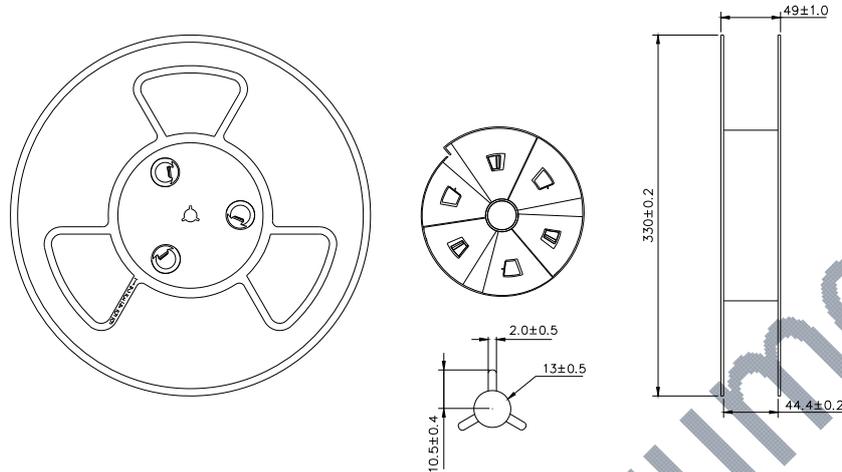

#### ● PACKING & LABEL SPECIFICATIONS

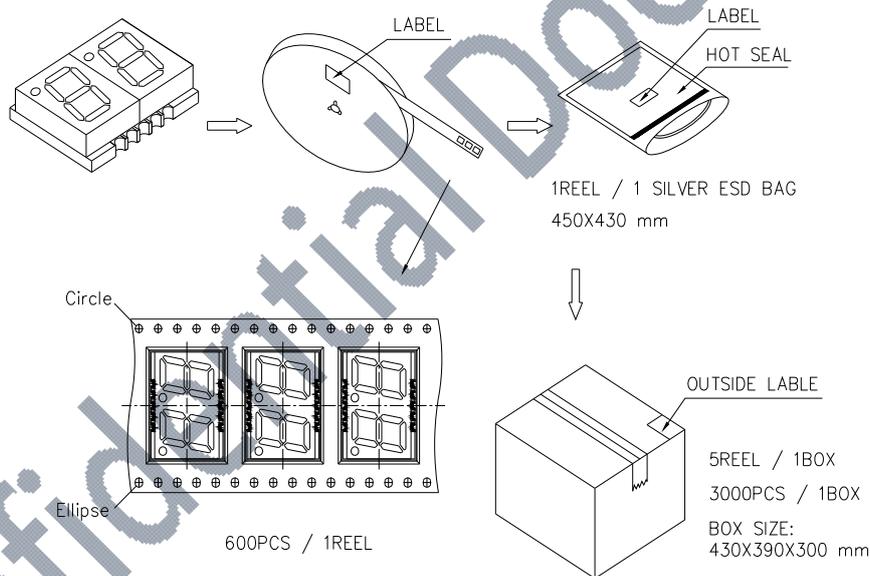

#### ● STORAGE CONDITION

In factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

After opened and not in factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION	STORAGE TIME
5°C ~ 30°C	Below 60%RH	Within 4 weeks (MSL as level 2a)