

www.opledtw.com


Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-Q3050W3-STT(R)-1.5-G(B)W
OPS-Q3051W3-STT(R)-1.5-G(B)W

● **EDIT HISTORY**

Version A: Mar. 24, 2025

Preliminary Spec.

Confidential Document

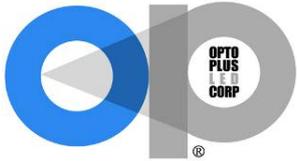

www.opledtw.com

Opto Plus LED Corp.

0.30" SMD Type LED Display

OPS-Q3050W3-STT(R)-1.5-G(B)W

OPS-Q3051W3-STT(R)-1.5-G(B)W

● FEATURES

- 0.30 inch (7.62 mm) Digit Height.
- Low current operation.
- Excellent character appearance.
- Super thin SMD type.
- RoHS compliant, Pb Free.

● DESCRIPTION

The device are 0.30 inch (7.62 mm) height quadruple digits 7-segment display.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright White LED chip which are made from InGaN

On a transparent GaN, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

● DEVICE

PART NO.	DESCRIPTION
OPS-Q3050W3-STT-1.5-GW	Common Anode Gray face White segment Top mount
OPS-Q3051W3-STT-1.5-GW	Common Cathode Gray face White segment Top mount
OPS-Q3050W3-STT-1.5-BW	Common Anode Black face White segment Top mount
OPS-Q3051W3-STT-1.5-BW	Common Cathode Black face White segment Top mount
OPS-Q3050W3-STR-1.5-GW	Common Anode Gray face White segment Reverse mount
OPS-Q3051W3-STR-1.5-GW	Common Cathode Gray face White segment Reverse mount
OPS-Q3050W3-STR-1.5-BW	Common Anode Black face White segment Reverse mount
OPS-Q3051W3-STR-1.5-BW	Common Cathode Black face White segment Reverse mount

RoHS Compliance




Pb Free.



Opto Plus LED Corp. 7F-3, No.496, Bannan Road, Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C)
Website: www.opledtw.com E-mail: sales@opledtw.com Tel: 886-2-2222-5698 Fax: 886-2-2222-2566


Disclaimer:
Subject to change without notice

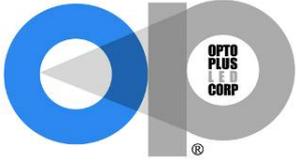


www.opledtw.com

Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-Q3050W3-STT(R)-1.5-G(B)W
OPS-Q3051W3-STT(R)-1.5-G(B)W

● **MECHANICAL DIMENSIONS**

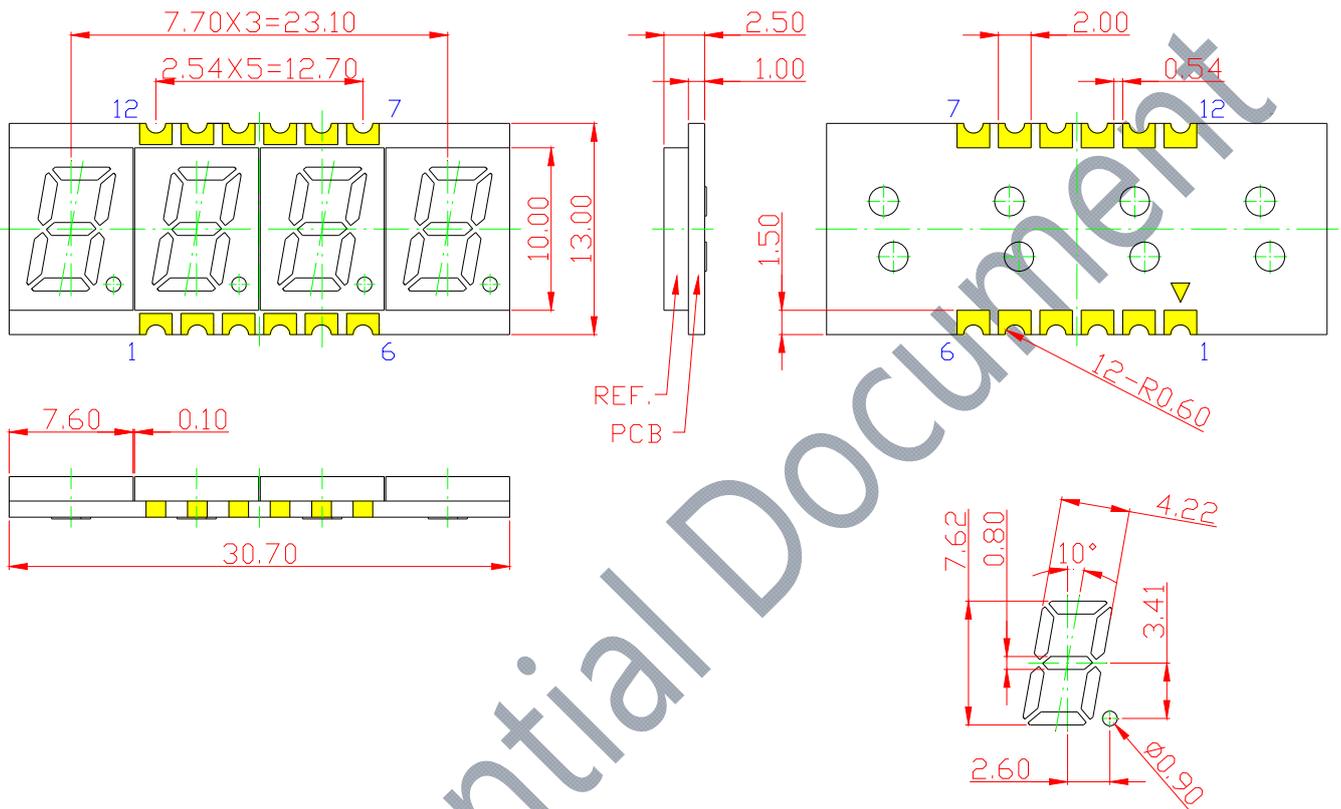

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.

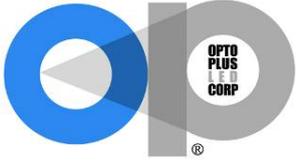

www.opledtw.com

Opto Plus LED Corp.


0.30" SMD Type LED Display

OPS-Q3050W3-STT(R)-1.5-G(B)W


OPS-Q3051W3-STT(R)-1.5-G(B)W

● TYPICAL INTERNAL EQUIVALENT CIRCUIT




Turn On Color

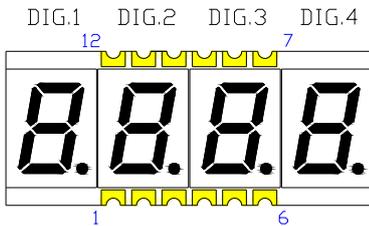


Recommended
Top Mount
Soldering Pattern

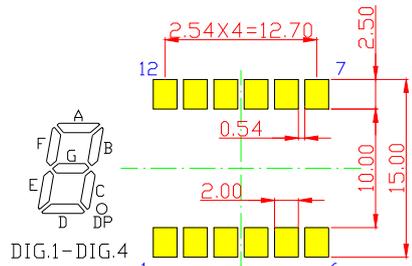

Recommended
Reverse Mount
Soldering Pattern

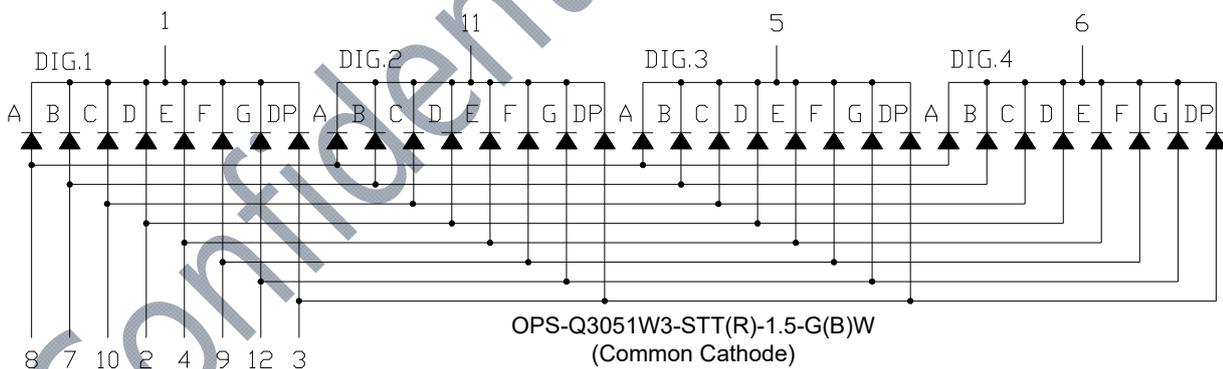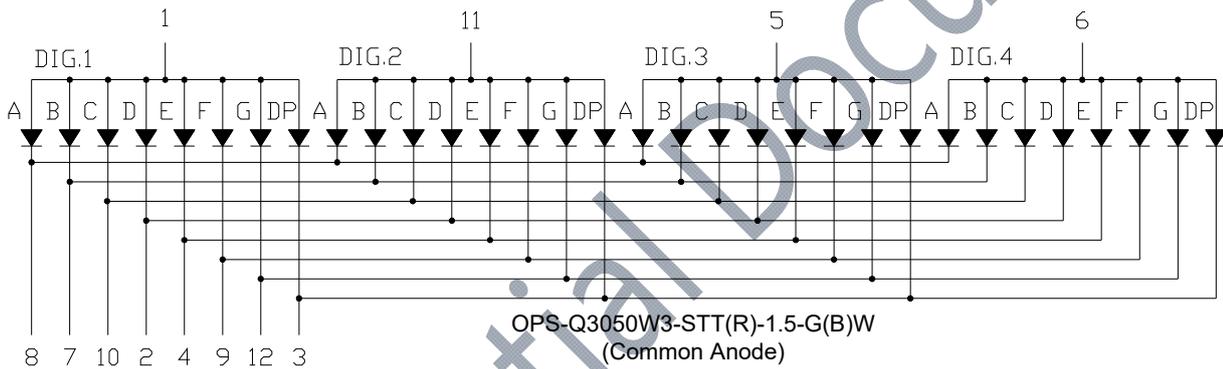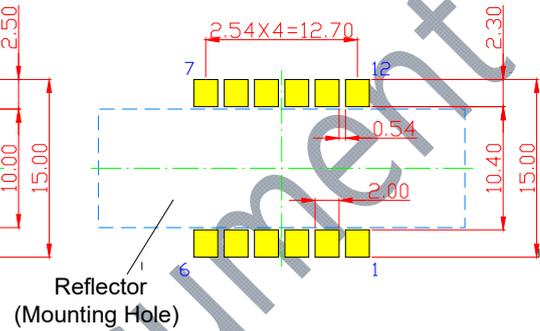

※EMITTED COLOR : SUPER BRIGHT WHITE


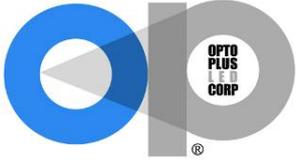


www.opledtw.com

Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-Q3050W3-STT(R)-1.5-G(B)W
OPS-Q3051W3-STT(R)-1.5-G(B)W

● **PRODUCT APPEARANCE**


The most common reflector color and segment color are show in below diagram.

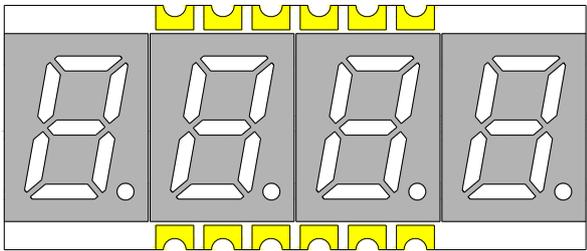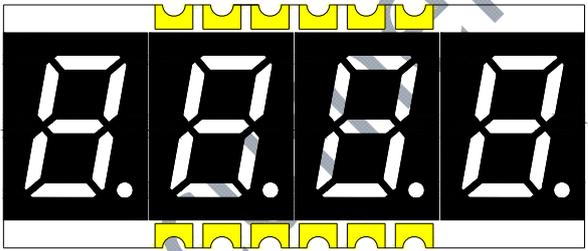-GW	-BW
	
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit www.opledtw.com or contact sales@opledtw.com for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-Q3050W3-STT-1.5-GW	Common Anode Gray face White segment Top mount
OPS-Q3051W3-STT-1.5-GW	Common Cathode Gray face White segment Top mount
OPS-Q3050W3-STT-1.5-BW	Common Anode Black face White segment Top mount
OPS-Q3051W3-STT-1.5-BW	Common Cathode Black face White segment Top mount
OPS-Q3050W3-STR-1.5-GW	Common Anode Gray face White segment Reverse mount
OPS-Q3051W3-STR-1.5-GW	Common Cathode Gray face White segment Reverse mount
OPS-Q3050W3-STR-1.5-BW	Common Anode Black face White segment Reverse mount
OPS-Q3051W3-STR-1.5-BW	Common Cathode Black face White segment Reverse mount



www.opledtw.com

Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-Q3050W3-STT(R)-1.5-G(B)W
OPS-Q3051W3-STT(R)-1.5-G(B)W


● **W3: SUPER BRIGHT WHITE (InGaN/GaN)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C (Per SMD Chip)

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P _D	16	mW
Forward current	I _F	5	mA
Pulse forward current	I _{FP}	15	mA
Reverse voltage	V _R	5	V
Operating temperature	T _{OP}	-40 to + 85	°C
Storage temperature	T _{ST}	-40 to + 100	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C (Per SMD Chip)

Characteristic	Symbol	Condition	Min.	Type	Max.	Unit
Forward Voltage	V _F	I _F =5mA	-	2.8	3.2	V
Reverse Current	I _R	V _R =5V	-	-	10	μA
Luminous Intensity	I _v	I _F =5mA	71.5	150	226	mcd
Chromaticity Coordinate		X	-	0.3000		
		Y	-	0.2963		



www.opledtw.com

Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-Q3050W3-STT(R)-1.5-G(B)W
OPS-Q3051W3-STT(R)-1.5-G(B)W

● **WHITE: IV BIN (Unit : mcd) 5mA**

Super Bright White	1	2	3
	71.5 – 112.5	112.5 – 180.0	180.0 – 226.0
SMD BIN	Q	R	S1

Note: It maintains a tolerance of $\pm 10\%$ on Luminous Intensity

● **WHITE: COLOR BIN**

CIE	X	Y	X	Y	X	Y
	0.2700	0.2325	0.2900	0.2600	0.3100	0.2875
	0.2700	0.2775	0.2900	0.3050	0.3100	0.3325
	0.2900	0.3050	0.3100	0.3325	0.3300	0.3600
	0.2900	0.2600	0.3100	0.2875	0.3300	0.3150
SMD BIN	C2		D1		D2	


Note: It maintains a tolerance of $x, y \pm 0.007$

● **FORWARD VOLTAGE (VF) BIN:**

BIN CODE	G1	G2	G3	G4
SPEC. RANGE	2.4-2.5	2.5-2.6	2.6-2.7	2.7-2.8

BIN CODE	H1	H2	H3	H4
SPEC. RANGE	2.8-2.9	2.9-3.0	3.0-3.1	3.1-3.2


Note: It maintains a tolerance of $\pm 0.05V$ on forward voltage measurements

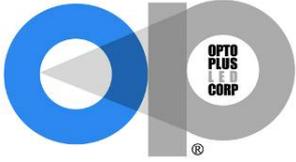

www.opledtw.com


Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-Q3050W3-STT(R)-1.5-G(B)W
OPS-Q3051W3-STT(R)-1.5-G(B)W

● **CHROMATICITY COORDINATE:**

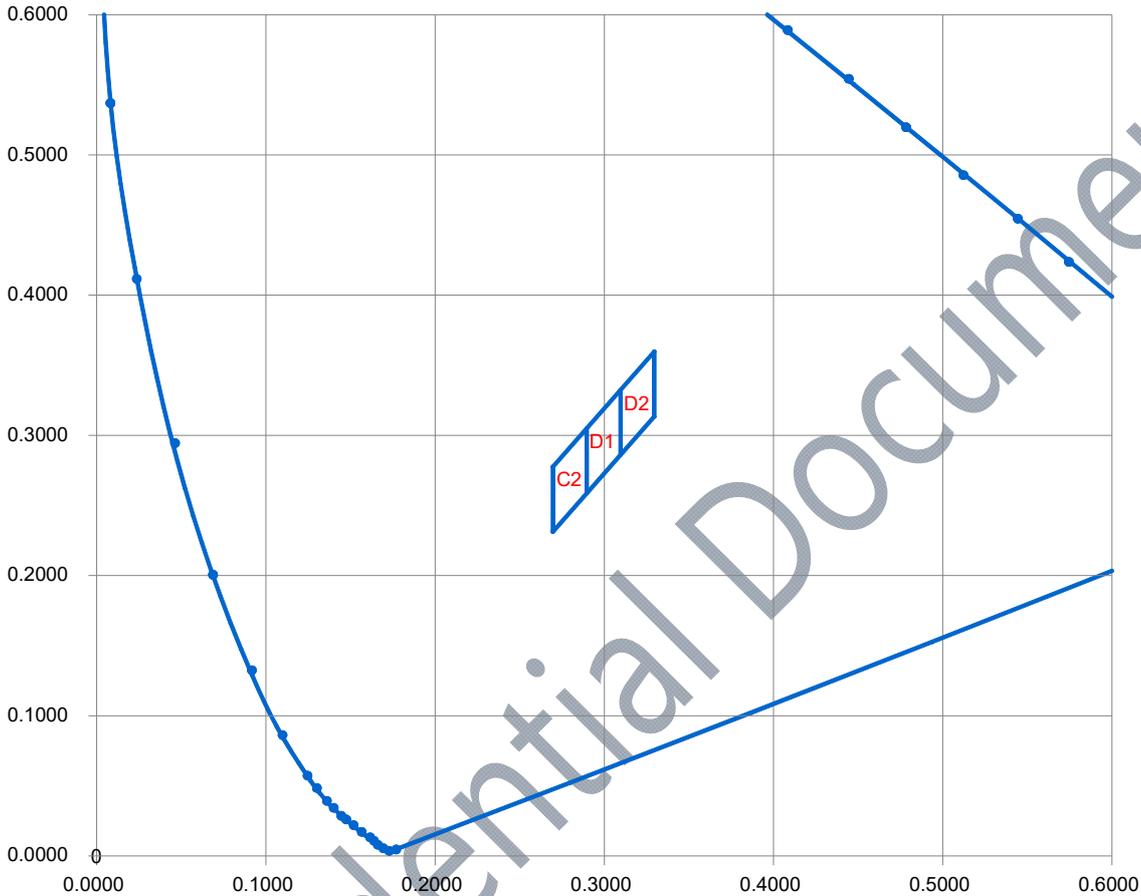

● **AVAILABLE BIN / HUE TABLE**

1C2	2C2	3C2
1D1	2D1	3D1
1D2	2D2	3D2

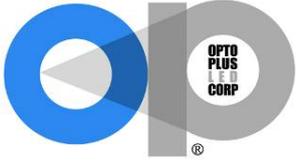

www.opledtw.com

Opto Plus LED Corp.


0.30" SMD Type LED Display


OPS-Q3050W3-STT(R)-1.5-G(B)W

OPS-Q3051W3-STT(R)-1.5-G(B)W

● W3: SUPER BRIGHT WHITE (InGaN/GaN) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

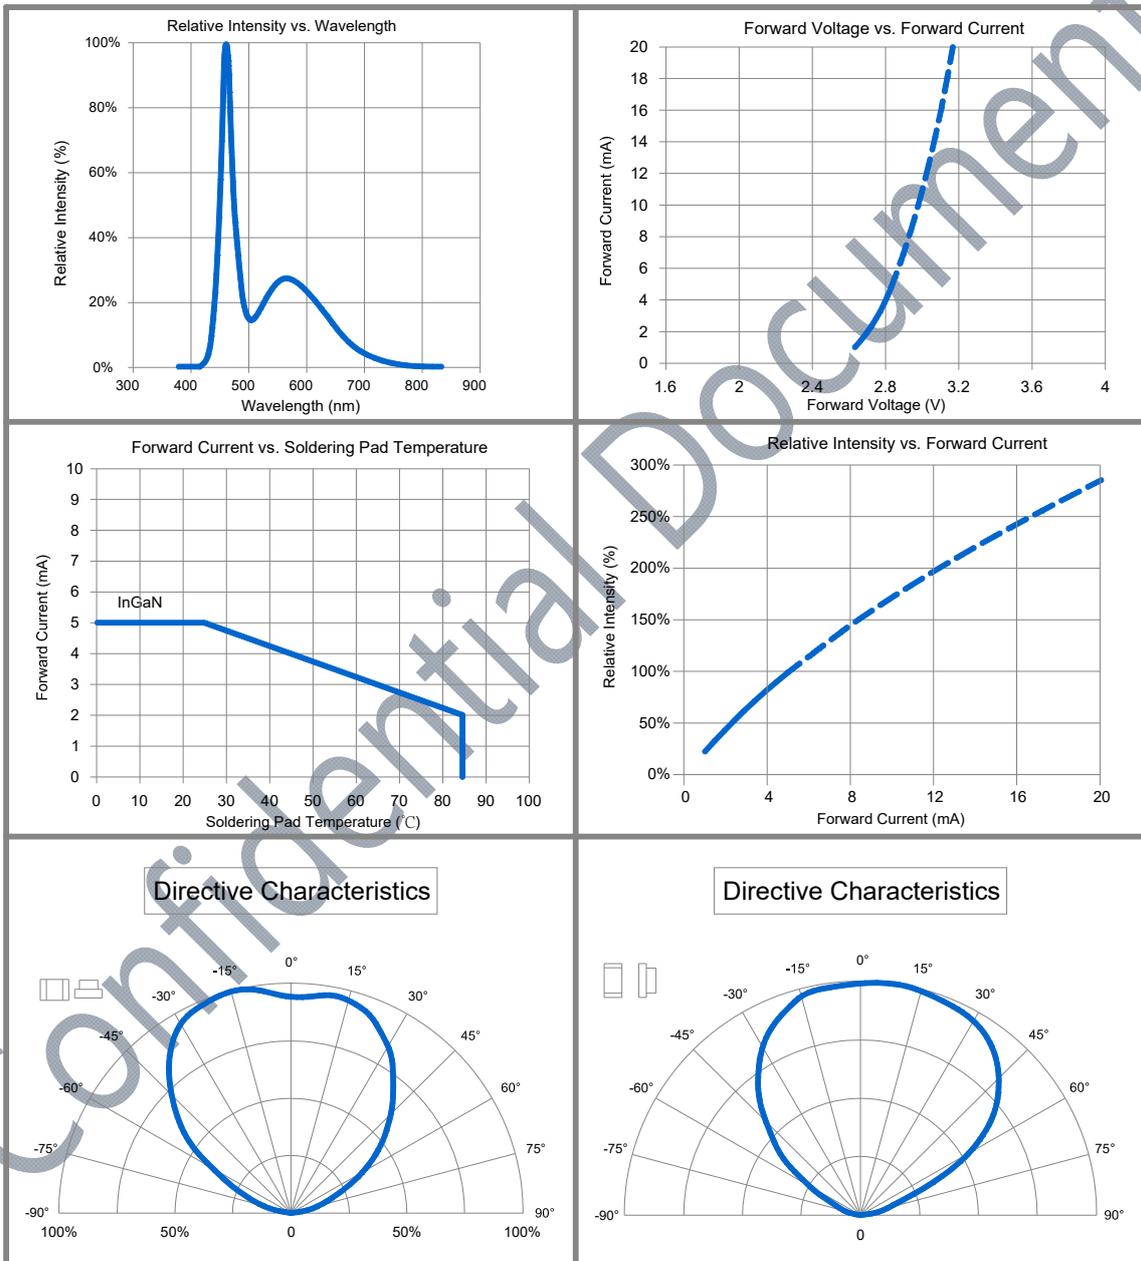




www.opledtw.com

Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-Q3050W3-STT(R)-1.5-G(B)W
OPS-Q3051W3-STT(R)-1.5-G(B)W

● **SMT REFLOW SOLDERING INSTRUCTIONS**

SMT Soldering Profile

Pb free reflow soldering Profile

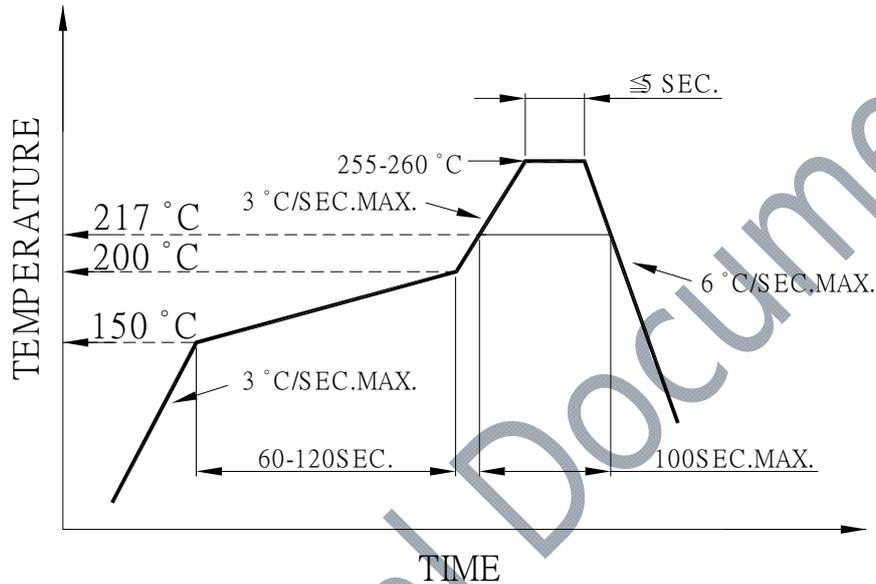


- We recommend the reflow temperature 245°C (+/- 5°C).
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

● **SOLDERING IRON**

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● **REWORK**

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.



www.opledtw.com


Opto Plus LED Corp.

0.30" SMD Type LED Display

OPS-Q3050W3-STT(R)-1.5-G(B)W

OPS-Q3051W3-STT(R)-1.5-G(B)W

● REEL DIMENSIONS

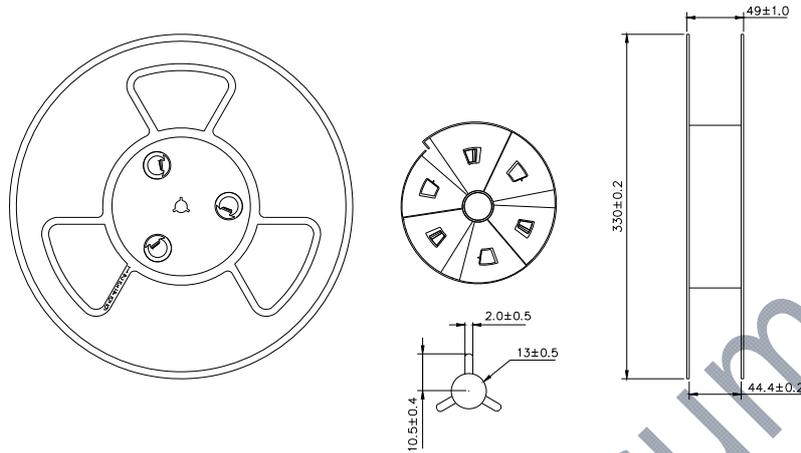

● PACKING & LABEL SPECIFICATIONS

OPS-Q3050(1)XX-STT-1.5-BW Top Mount	OPS-Q3050(1)XX-STR-1.5-BW Reverse Mount	OPS-Q3050(1)XX-STT-1.5-BW OPS-Q3050(1)XX-STR-1.5-BW
		<p>1REEL / 1 SILVER ESD BAG 450X430 mm</p> <p>OUTSIDE LABEL 5REEL / 1BOX 5000PCS / 1BOX BOX SIZE: 430X390X300 mm</p>

● STORAGE CONDITION

In factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

After opened and not in factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION	STORAGE TIME
5°C ~ 30°C	Below 60%RH	Within 4 weeks (MSL as level 2a)