



[www.opledtw.com](http://www.opledtw.com)

**Opto Plus LED Corp.**  
**0.56" SMD Type LED Display**  
**OPS-Q5614SA | OPS-Q5615SA**

● **EDIT HISTORY**

Version A: Dec. 04, 2020

Preliminary Spec.



[www.opledtw.com](http://www.opledtw.com)

# Opto Plus LED Corp.

## 0.56" SMD Type LED Display

### OPS-Q5614SA | OPS-Q5615SA

#### ● FEATURES

- 0.56 inch (14.20 mm) digit height.
- SMD type.
- Low current operation.
- RoHS Compliant, Pb Free.

#### ● DESCRIPTION

The device are 0.56 inch (14.20 mm) height quadruple digit 7-segment displays.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright Amber LED chip which are made from AlGaInP  
On a transparent GaAs, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

#### ● DEVICE

PART NO.	DESCRIPTION
OPS-Q5614SA-GW	Common Anode   Gray face   White segment
OPS-Q5615SA-GW	Common Cathode   Gray face   White segment
OPS-Q5614SA-BW	Common Anode   Black face   White segment
OPS-Q5215SA-BW	Common Cathode   Black face   White segment

#### RoHS Compliance



#### Pb Free.






# Opto Plus LED Corp.

## 0.56" SMD Type LED Display

### OPS-Q5614SA | OPS-Q5615SA

#### ● MECHANICAL DIMENSIONS

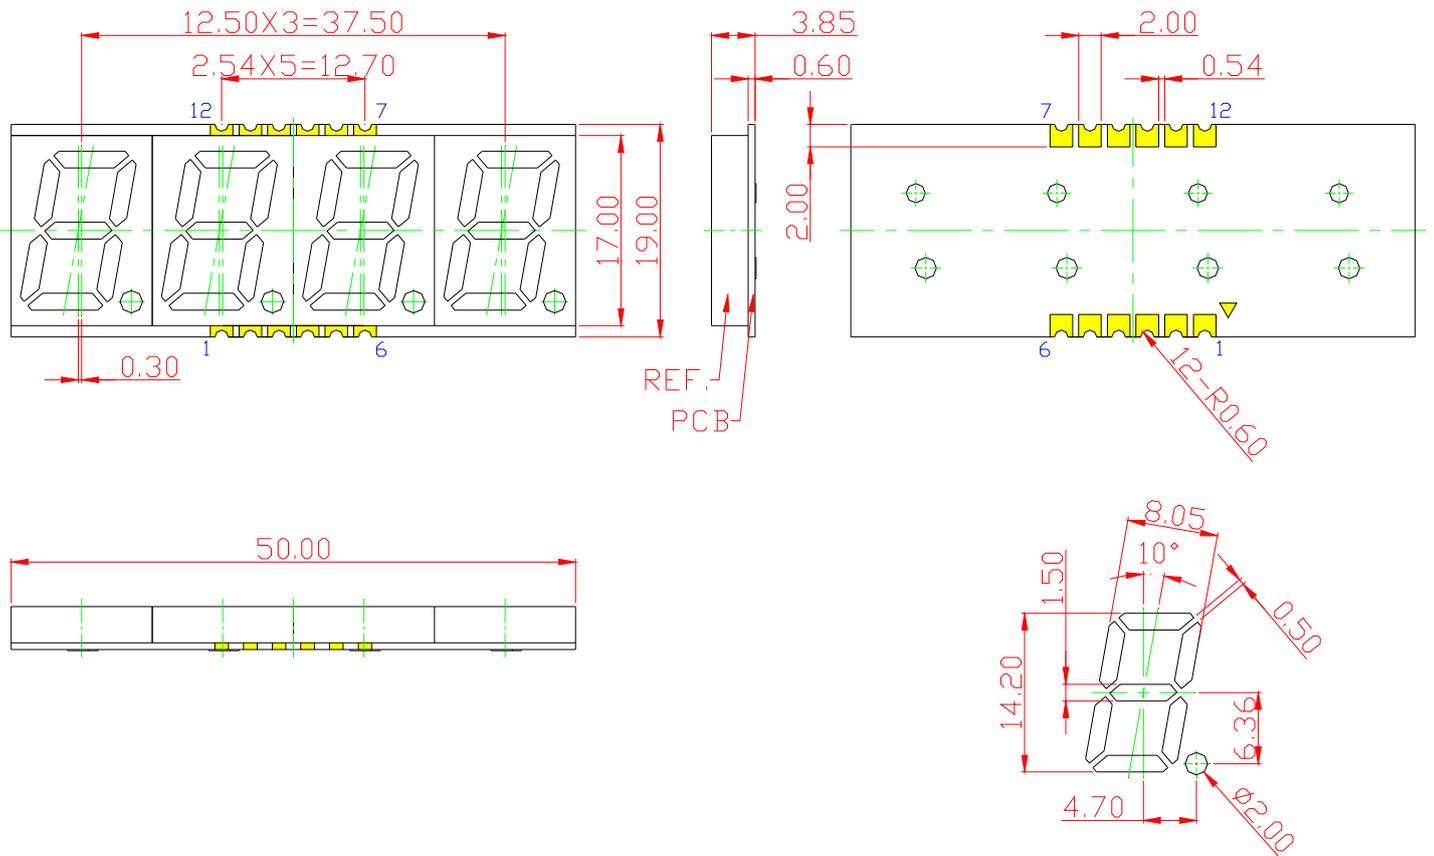

NOTES: All dimensions are in millimeters. Tolerances are  $\pm 0.25$  mm unless otherwise noted.



[www.opledtw.com](http://www.opledtw.com)


# Opto Plus LED Corp.

## 0.56" SMD Type LED Display




### OPS-Q5614SA | OPS-Q5615SA

#### ● TYPICAL INTERNAL EQUIVALENT CIRCUIT

Turn On Color

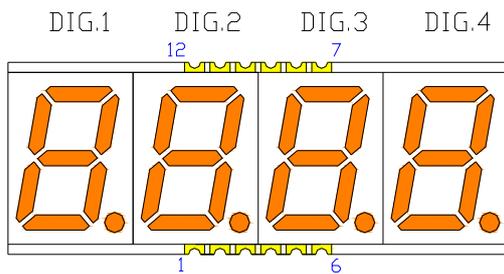

Recommended Soldering Pattern

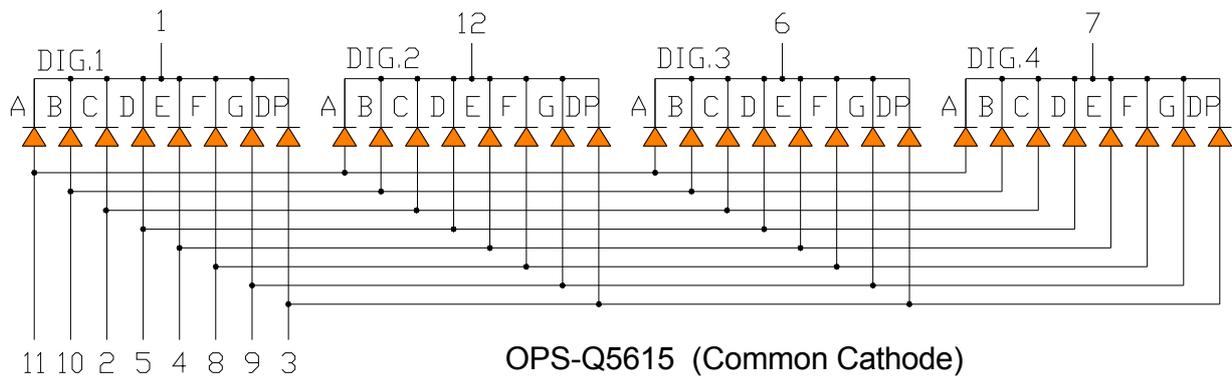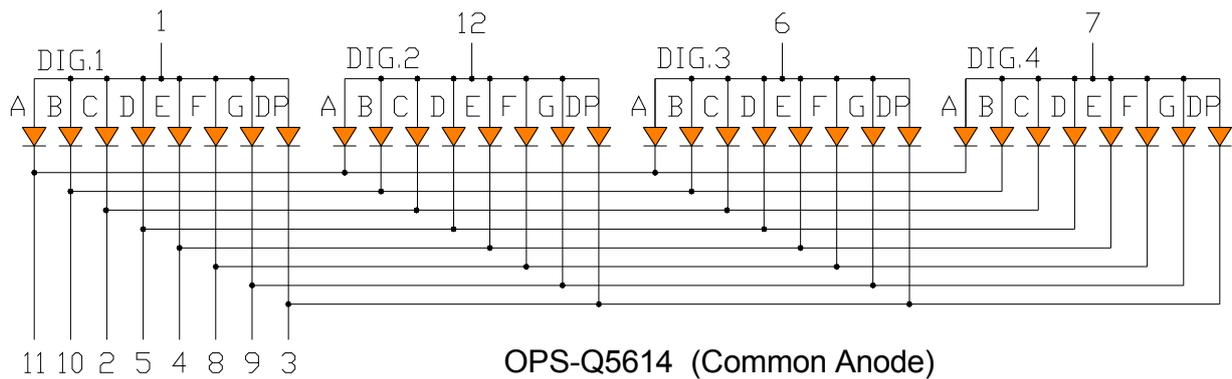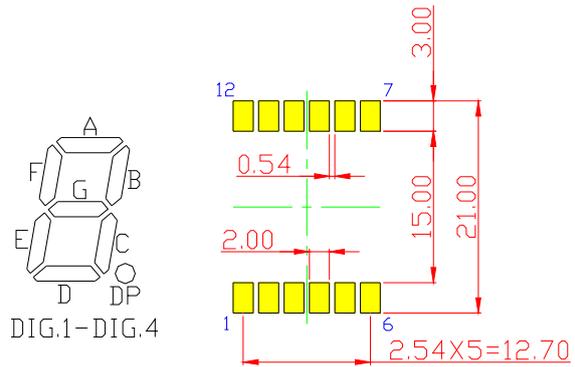

※EMITTED COLOR : SUPER BRIGHT AMBER

Opto Plus LED Corp. 7F-3, No.496, Bannan Road, Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C)  
 Website: [www.opledtw.com](http://www.opledtw.com) E-mail: [sales@opledtw.com](mailto:sales@opledtw.com) Tel: 886-2-2222-5698 Fax: 886-2-2222-2566

Disclaimer:  
 Subject to change without notice





# Opto Plus LED Corp.

## 0.56" SMD Type LED Display

### OPS-Q5614SA | OPS-Q5615SA

#### ● PRODUCT APPEARANCE

The most common reflector color and segment color are show in below diagram.

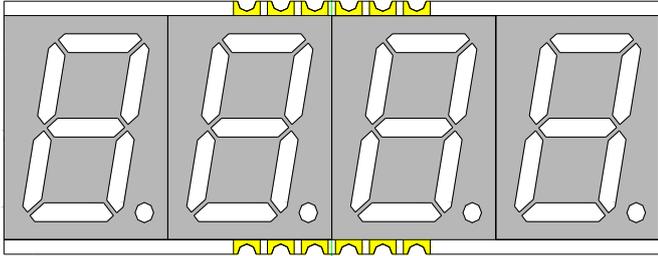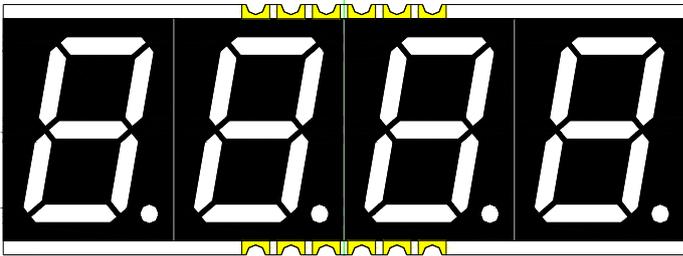-GW	-BW
	
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit [www.opledtw.com](http://www.opledtw.com) or contact [sales@opledtw.com](mailto:sales@opledtw.com) for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-Q5614SA-GW	Common Anode   Gray face   White segment
OPS-Q5615SA-GW	Common Cathode   Gray face   White segment
OPS-Q5614SA-BW	Common Anode   Black face   White segment
OPS-Q5615SA-BW	Common Cathode   Black face   White segment



[www.opledtw.com](http://www.opledtw.com)

# Opto Plus LED Corp.

## 0.56" SMD Type LED Display

### OPS-Q5614SA | OPS-Q5615SA

#### ● SA: SUPER BRIGHT AMBER (AlGaInP/GaAs)

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	$P_{AD}$	48	mW
Continuous forward current	$I_{AF}$	20	mA
Peak current (duty cycle 1/10, 1kHz)	$I_{PF}$	40	mA
Reverse voltage	$V_R$	5	V
Operating temperature	$T_{OPR}$	-40 to +105	°C
Storage temperature	$T_{STG}$	-40 to +105	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	$V_F$	$I_F = 20mA$	-	2.0	2.4	V
Reverse Current, (Per Dice)	$I_R$	$V_R = 5V$	-	-	10	$\mu A$
Peak Wavelength	$\lambda_P$	$I_F = 20mA$	-	612	-	nm
Dominant Wavelength	$\lambda_D$	$I_F = 20mA$	601	-	613	nm
Luminous Intensity	$I_v$	$I_F = 20mA$	30	52.5	75	mcd
Spectral Line Half-Bandwidth	$\Delta\lambda$	$I_F = 20mA$	-	20	-	nm



[www.opledtw.com](http://www.opledtw.com)

# Opto Plus LED Corp. 0.56" SMD Type LED Display OPS-Q5614SA | OPS-Q5615SA

● SA: BIN GRADE (Unit : mcd) 20mA

Super Bright Amber	L	M	N
	30.0 - 45.0	45.1 - 60.0	60.1 - 75.0

● SA: HUE GRADE ( $\lambda_D$  : nm)

1	2	3
601.0 – 605.0	605.1 – 610.0	610.1 – 613.0

● AVAILABLE BIN / HUE TABLE

L1	M1	N1
L2	M2	N2
L3	M3	N3



# Opto Plus LED Corp.

## 0.56" SMD Type LED Display

### OPS-Q5614SA | OPS-Q5615SA

#### ● SA: SUPER BRIGHT AMBER (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves  
(25 °C Free Air Temperature Unless Otherwise Specified)

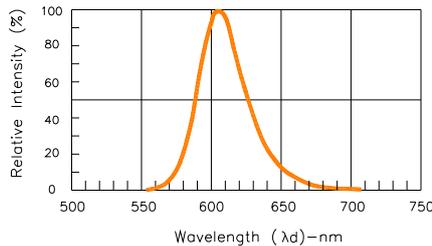


Fig.1-Relative Intensity VS. Wavelength

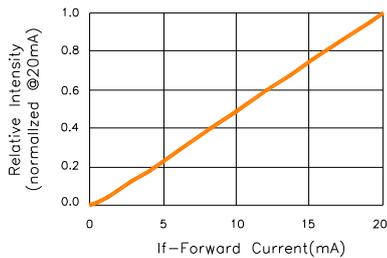


Fig.2-Relative Luminous Intensity vs. Forward Current

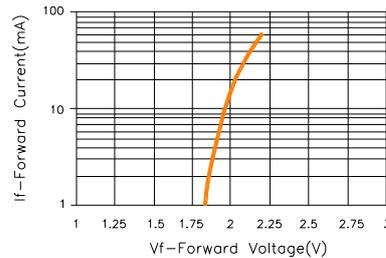


Fig.3-Forward Current vs. Forward Voltage

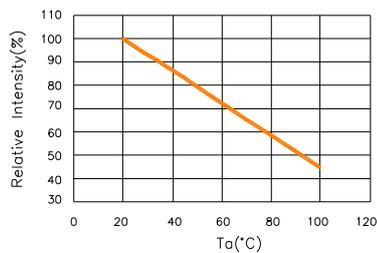


Fig.4-Relative Intensity(@20mA)VS. Ambient Temperature

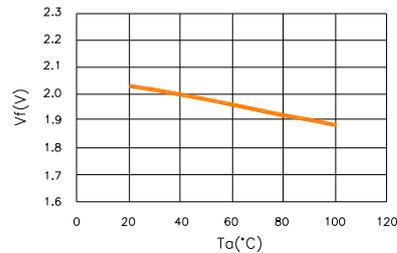


Fig.5-Forward Voltage(@20mA)VS. Ambient Temperature

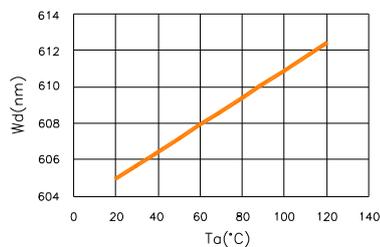


Fig.6-Dominant Wavelength(@20mA) VS. Ambient Temperature

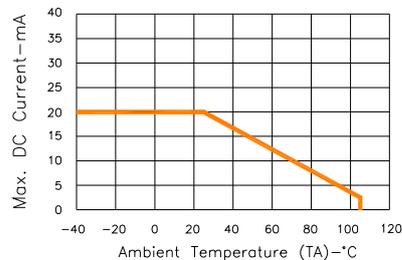


Fig.7-Max. Allowable DC Current VS. Ambient Temperature



[www.opledtw.com](http://www.opledtw.com)


# Opto Plus LED Corp.

## 0.56" SMD Type LED Display

### OPS-Q5614SA | OPS-Q5615SA

#### ● SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile  
Pb free reflow soldering Profile

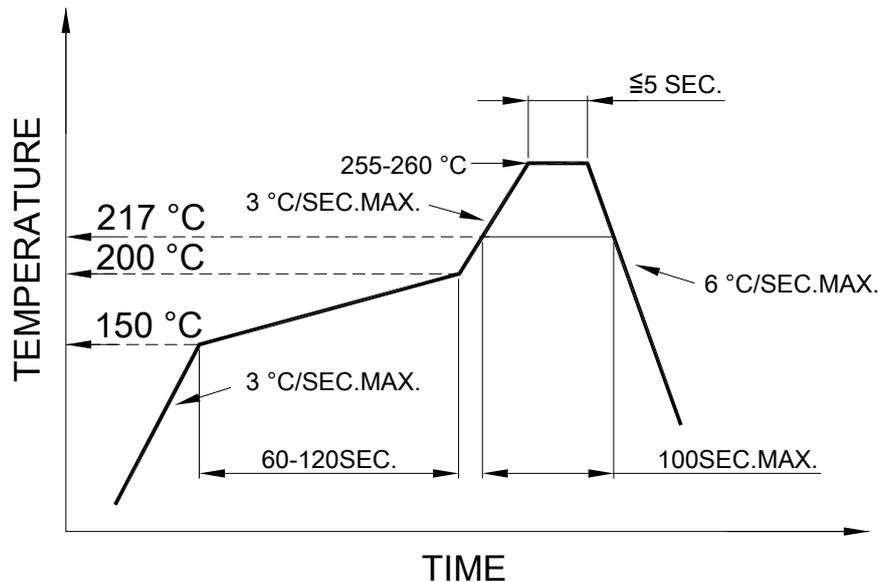

- We recommend the reflow temperature 245°C (+/- 5°C).  
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

#### ● SOLDERING IRON

Basic spec is  $\leq 4$  sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

#### ● REWORK

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.




[www.opledtw.com](http://www.opledtw.com)

# Opto Plus LED Corp.


## 0.56" SMD Type LED Display

### OPS-Q5614SA | OPS-Q5615SA

#### ● REEL DIMENSIONS

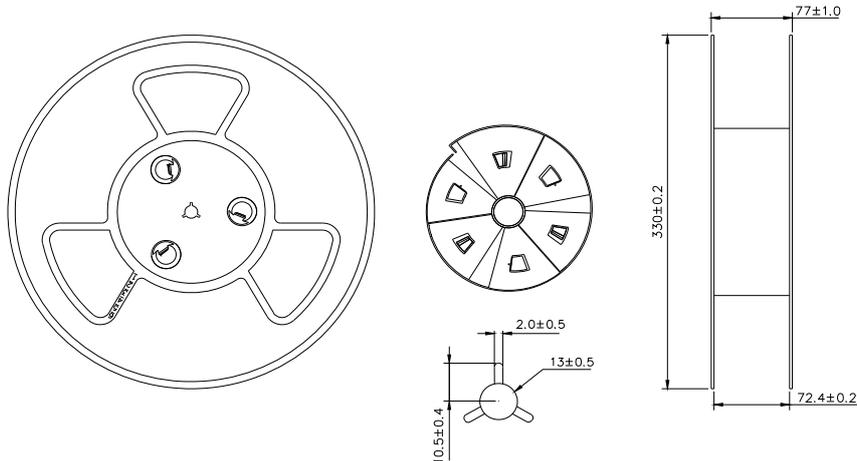

#### ● PACKING & LABEL SPECIFICATIONS

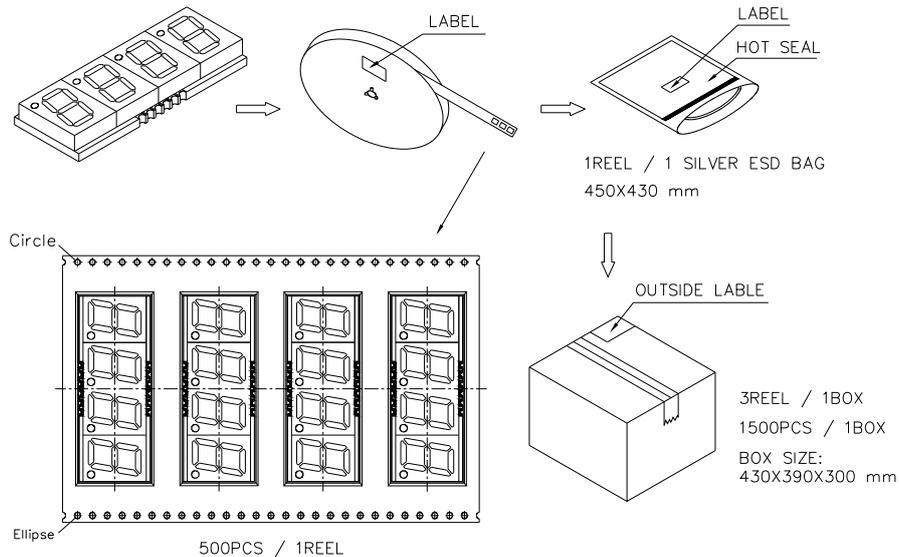

#### ● STORAGE CONDITION

In factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

After opened and not in factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION	STORAGE TIME
5°C ~ 30°C	Below 60%RH	Within 4 weeks (MSL as level 2a)