



[www.opledtw.com](http://www.opledtw.com)

**Opto Plus LED Corp.**  
**0.20" SMD Type LED Display**  
**OPS-S2010W3 | OPS-S2011W3**

● **EDIT HISTORY**

Version A: Jul. 08, 2022

Preliminary Spec.

Confidential Document



[www.opledtw.com](http://www.opledtw.com)

# Opto Plus LED Corp. 0.20" SMD Type LED Display OPS-S2010W3 | OPS-S2011W3

## ● FEATURES

- 0.20 inch (5.08 mm) Digit Height.
- SMD type.
- Low current operation.
- RoHS Compliant, Pb Free.

## ● DESCRIPTION

The device are 0.20 inch (5.08 mm) height single digit 7-segment displays.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright White SMD LED chip which are made from InGaN on a transparent GaN, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

## ● DEVICE

PART NO.	DESCRIPTION
OPS-S2010W3-GW	Common Anode   Gray face   White segment
OPS-S2011W3-GW	Common Cathode   Gray face   White segment
OPS-S2010W3-BW	Common Anode   Black face   White segment
OPS-S2011W3-BW	Common Cathode   Black face   White segment

**RoHS Compliance**



**Pb Free.**






[www.opledtw.com](http://www.opledtw.com)

# Opto Plus LED Corp.

## 0.20" SMD Type LED Display

### OPS-S2010W3 | OPS-S2011W3

#### ● MECHANICAL DIMENSIONS

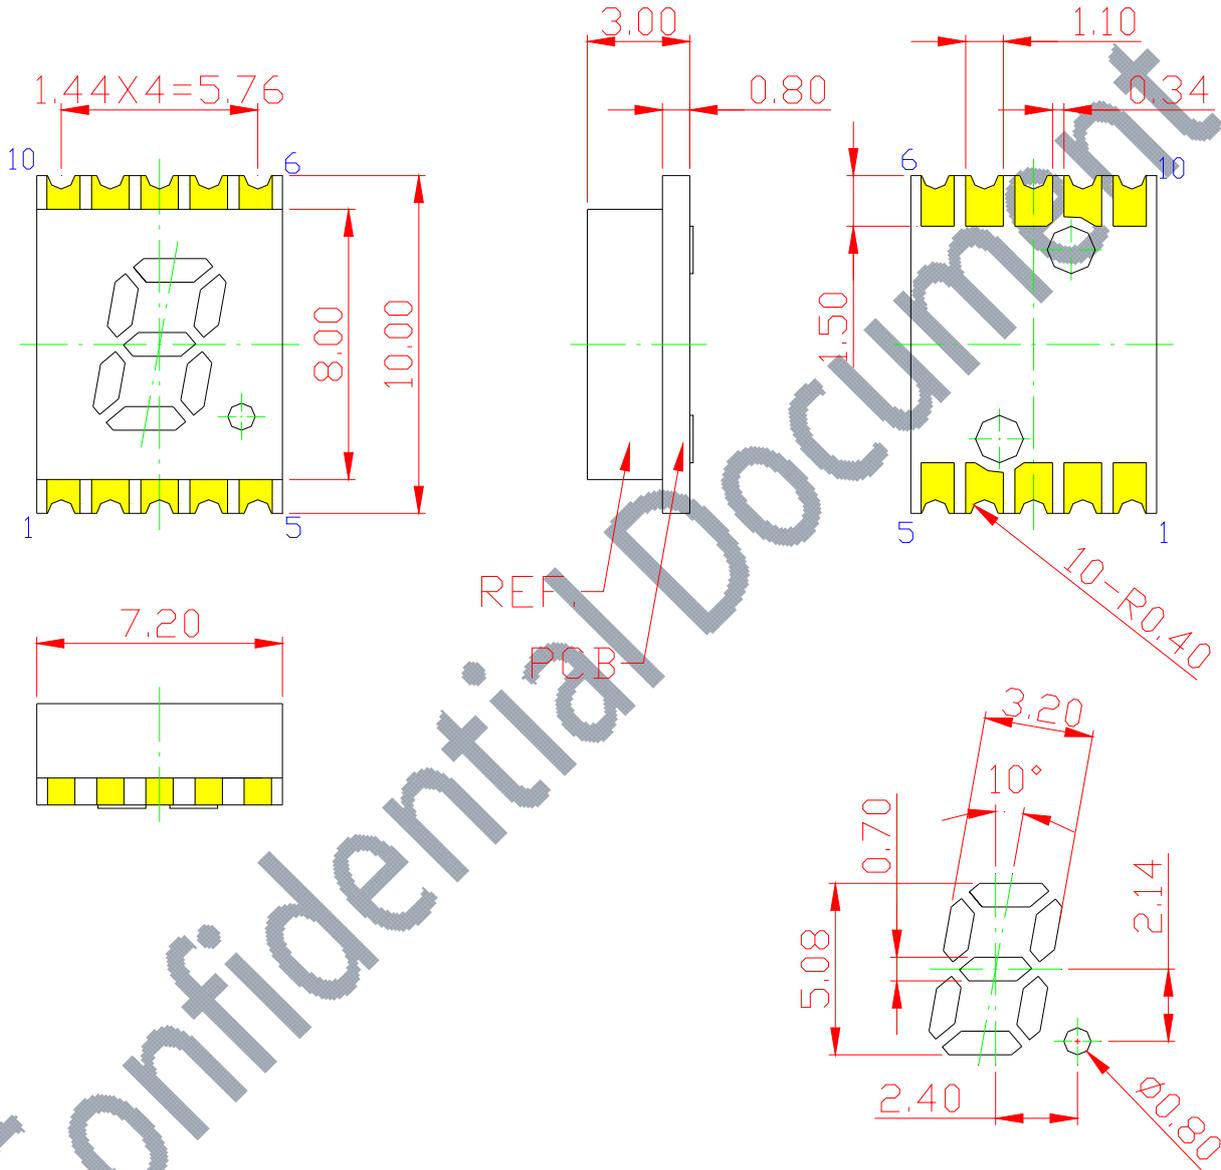

NOTES: All dimensions are in millimeters. Tolerances are  $\pm 0.25$  mm unless otherwise noted.



www.opledtw.com



# Opto Plus LED Corp.

## 0.20" SMD Type LED Display



### OPS-S2010W3 | OPS-S2011W3

#### ● TYPICAL INTERNAL EQUIVALENT CIRCUIT


Turn On Color

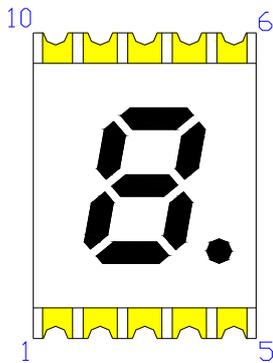

Recommended Soldering Pattern

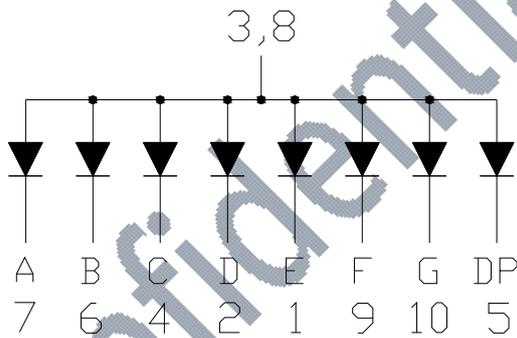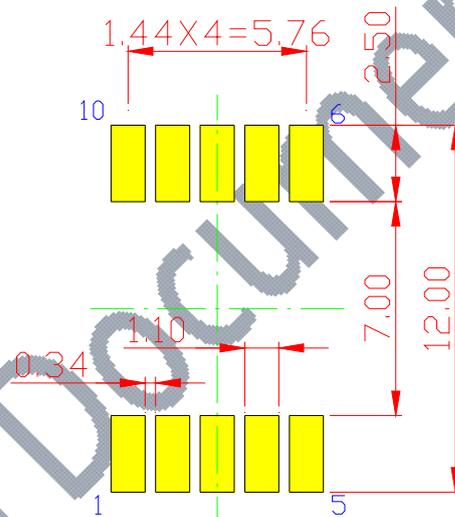

OPS-S2010  
( Common Anode )

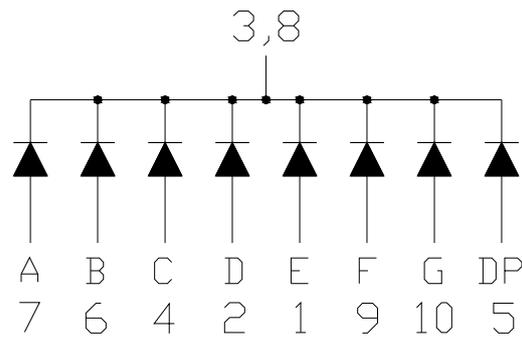

OPS-S2011  
( Common Cathode )

※EMITTED COLOR : SUPER BRIGHT WHITE



# Opto Plus LED Corp.

## 0.20" SMD Type LED Display

### OPS-S2010W3 | OPS-S2011W3

#### ● PRODUCT APPEARANCE

The most common reflector color and segment color are show in below diagram.

-GW	-BW
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit [www.opledtw.com](http://www.opledtw.com) or contact [sales@opledtw.com](mailto:sales@opledtw.com) for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-S2010W3-GW	Common Anode   Gray face   White segment
OPS-S2011W3-GW	Common Cathode   Gray face   White segment
OPS-S2010W3-BW	Common Anode   Black face   White segment
OPS-S2011W3-BW	Common Cathode   Black face   White segment



**Opto Plus LED Corp.**  
**0.20'' SMD Type LED Display**  
**OPS-S2010W3 | OPS-S2011W3**

● **W3: SUPER BRIGHT WHITE (InGaN/GaN)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C (Per SMD Chip)

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	$P_D$	16	mW
Forward current	$I_F$	5	mA
Pulse forward current	$I_{FP}$	15	mA
Reverse voltage	$V_R$	5	V
Operating temperature	$T_{OP}$	-40 to + 85	°C
Storage temperature	$T_{ST}$	-40 to + 100	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C (Per SMD Chip)

Characteristic	Symbol	Condition	Min.	Type	Max.	Unit
Forward Voltage	$V_F$	$I_F = 5mA$	-	2.8	3.2	V
Reverse Current	$I_R$	$V_R = 5V$	-	-	10	$\mu A$
Luminous Intensity	$I_v$	$I_F = 5mA$	71.5	150	226	mcd
Chromaticity Coordinate		X	-	0.3000		
		Y	-	0.2963		



**Opto Plus LED Corp.**  
**0.20" SMD Type LED Display**  
**OPS-S2010W3 | OPS-S2011W3**

● **WHITE: IV BIN (Unit : mcd) 5mA**

Super Bright White	1	2	3
	71.5 – 112.5	112.5 – 180.0	180.0 – 226.0
SMD BIN	Q	R	S1

Note: It maintains a tolerance of  $\pm 10\%$  on Luminous Intensity

● **WHITE: COLOR BIN**

CIE	X	Y	X	Y	X	Y
	0.2700	0.2325	0.2900	0.2600	0.3100	0.2875
	0.2700	0.2775	0.2900	0.3050	0.3100	0.3325
	0.2900	0.3050	0.3100	0.3325	0.3300	0.3600
	0.2900	0.2600	0.3100	0.2875	0.3300	0.3150
SMD BIN	C2		D1		D2	

Note: It maintains a tolerance of  $x, y \pm 0.007$

● **FORWARD VOLTAGE (VF) BIN:**

BIN CODE	G1	G2	G3	G4
SPEC. RANGE	2.4-2.5	2.5-2.6	2.6-2.7	2.7-2.8

BIN CODE	H1	H2	H3	H4
SPEC. RANGE	2.8-2.9	2.9-3.0	3.0-3.1	3.1-3.2

Note: It maintains a tolerance of  $\pm 0.05V$  on forward voltage measurements




[www.opledtw.com](http://www.opledtw.com)

# Opto Plus LED Corp.

## 0.20'' SMD Type LED Display

### OPS-S2010W3 | OPS-S2011W3

#### ● CHROMATICITY COORDINATE:

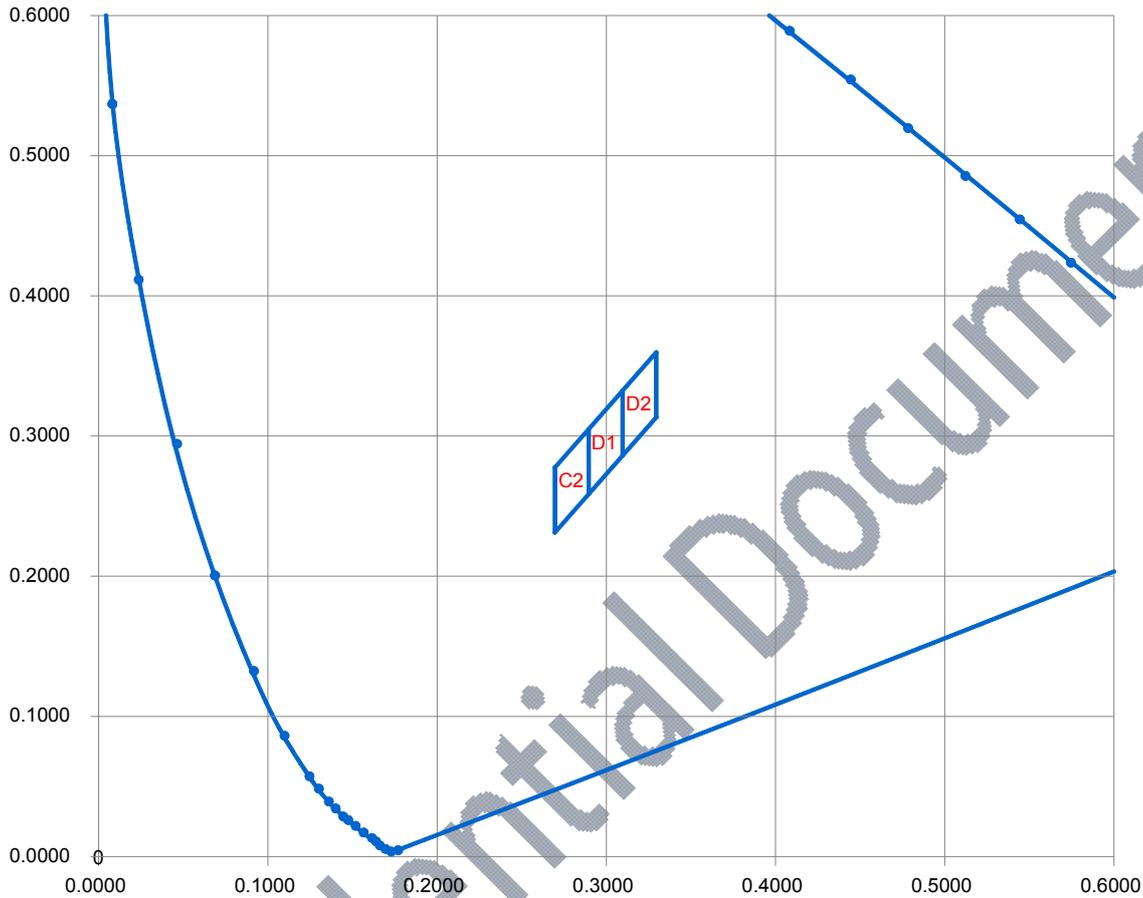

#### ● AVAILABLE BIN / HUE TABLE

1C2	2C2	3C2
1D1	2D1	3D1
1D2	2D2	3D2




# Opto Plus LED Corp.

## 0.20" SMD Type LED Display

### OPS-S2010W3 | OPS-S2011W3

#### ● W3: SUPER BRIGHT WHITE (InGaN/GaN) CURVE

Typical Electro-optical Characteristic Curves  
(25 °C Free Air Temperature Unless Otherwise Specified)

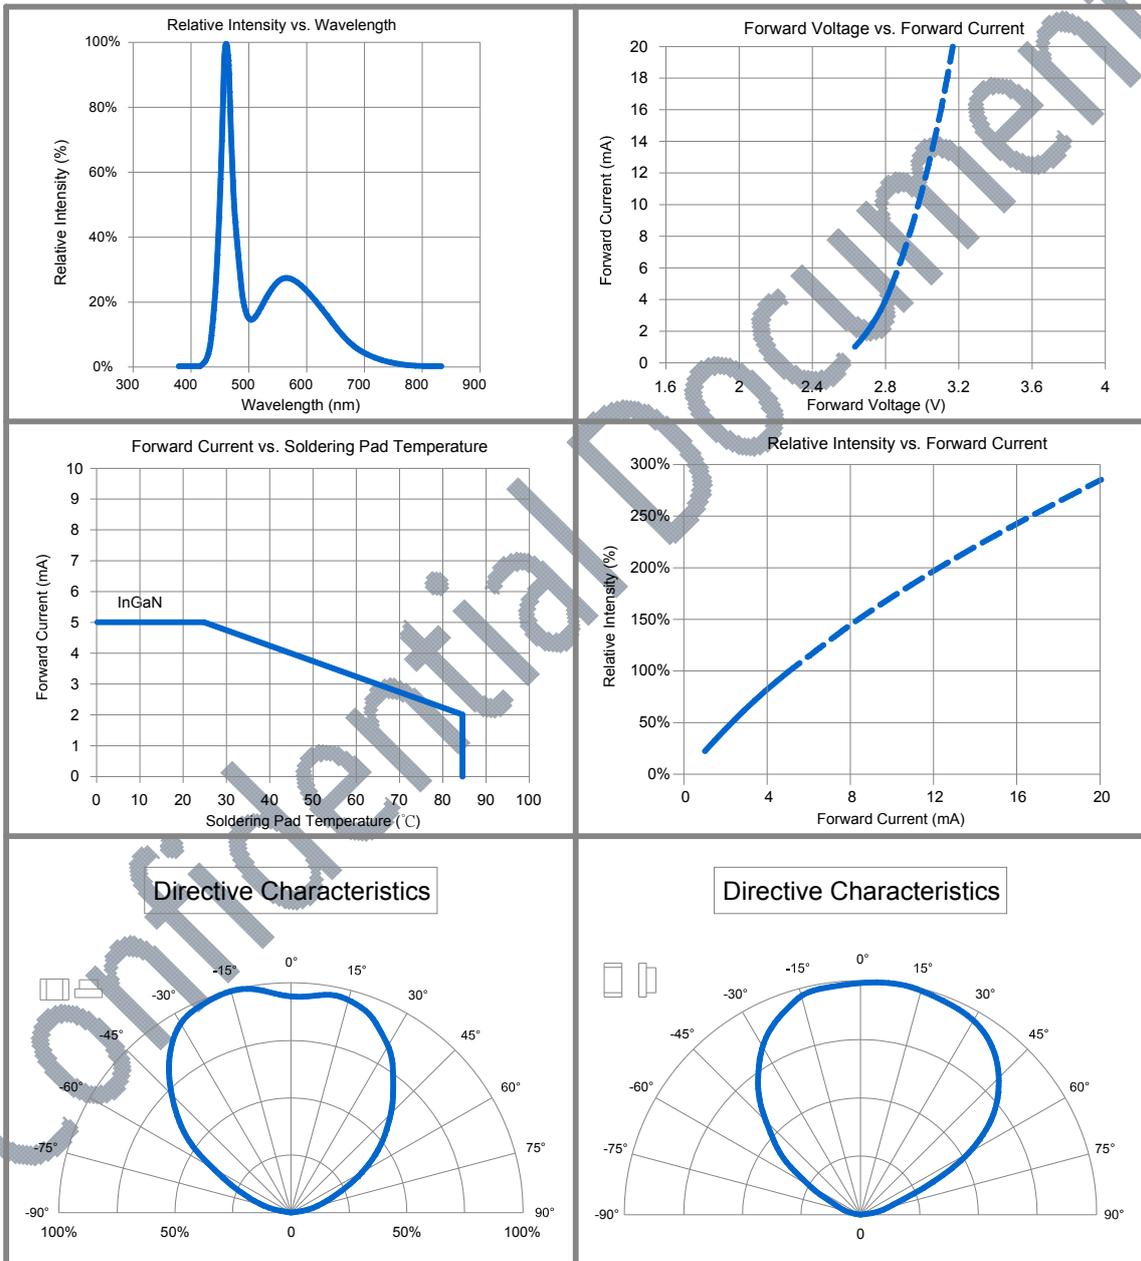




www.opledtw.com


# Opto Plus LED Corp. 0.20" SMD Type LED Display OPS-S2010W3 | OPS-S2011W3

## LIFE TIME

(25°C , 5mA)

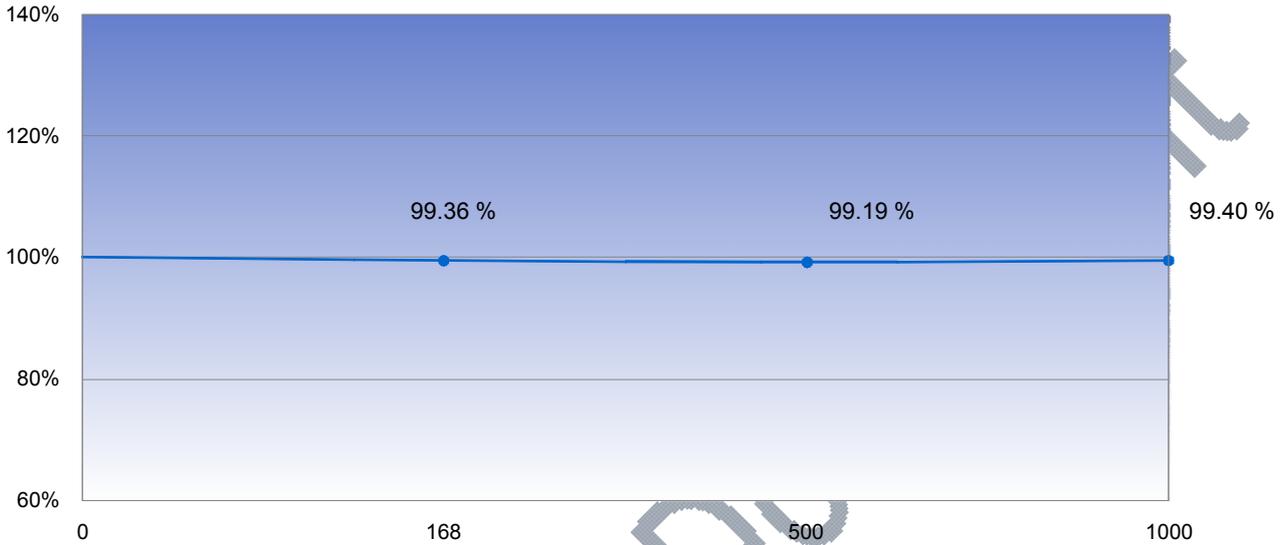


## LIFE Estimate

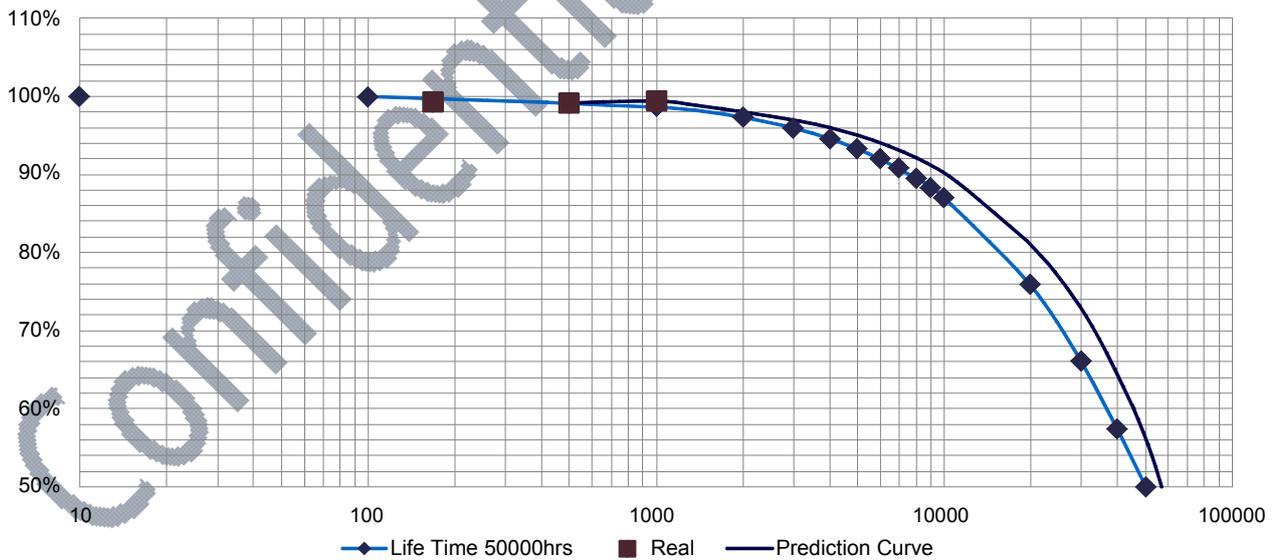

## ● SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile

Pb free reflow soldering Profile

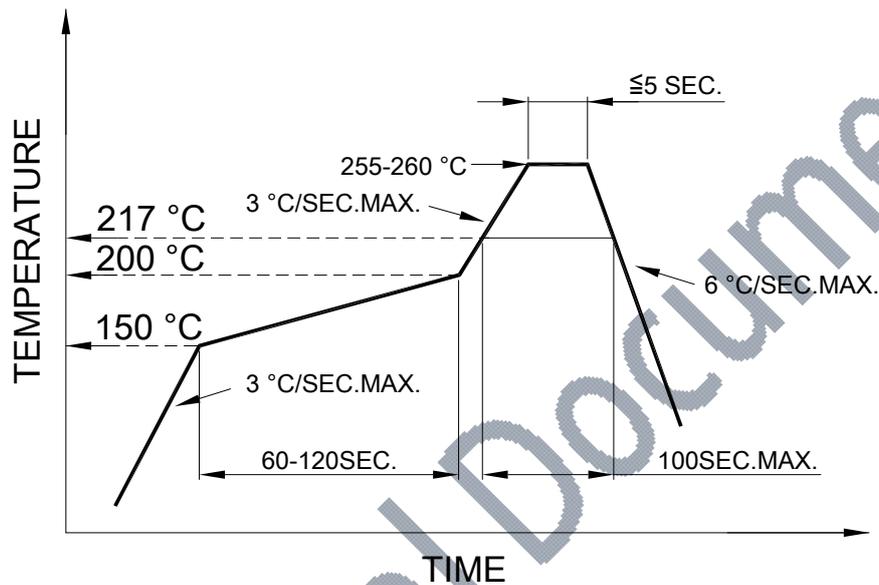

- We recommend the reflow temperature 245°C (+/- 5°C).  
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

## ● SOLDERING IRON

Basic spec is  $\leq 4$  sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

## ● REWORK

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.




[www.opledtw.com](http://www.opledtw.com)

# Opto Plus LED Corp.


## 0.20" SMD Type LED Display

### OPS-S2010W3 | OPS-S2011W3

#### ● REEL DIMENSIONS

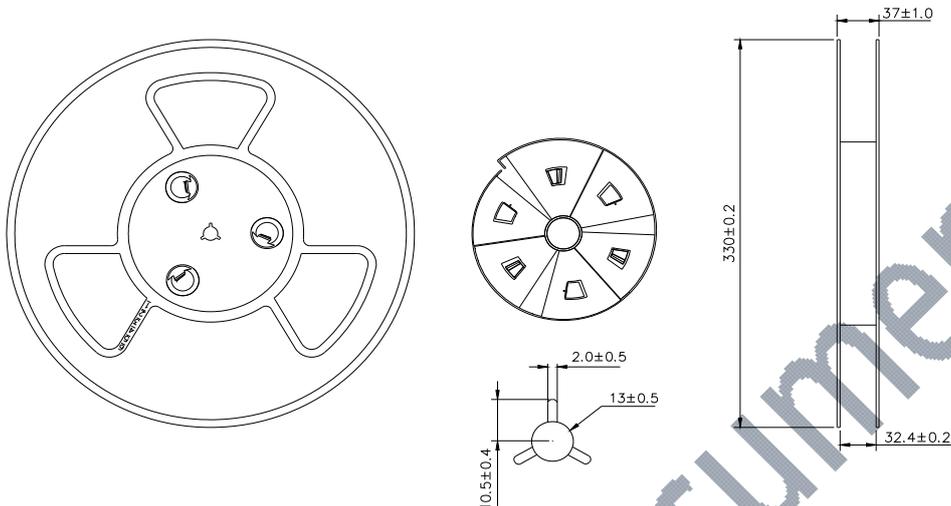

#### ● PACKING & LABEL SPECIFICATIONS

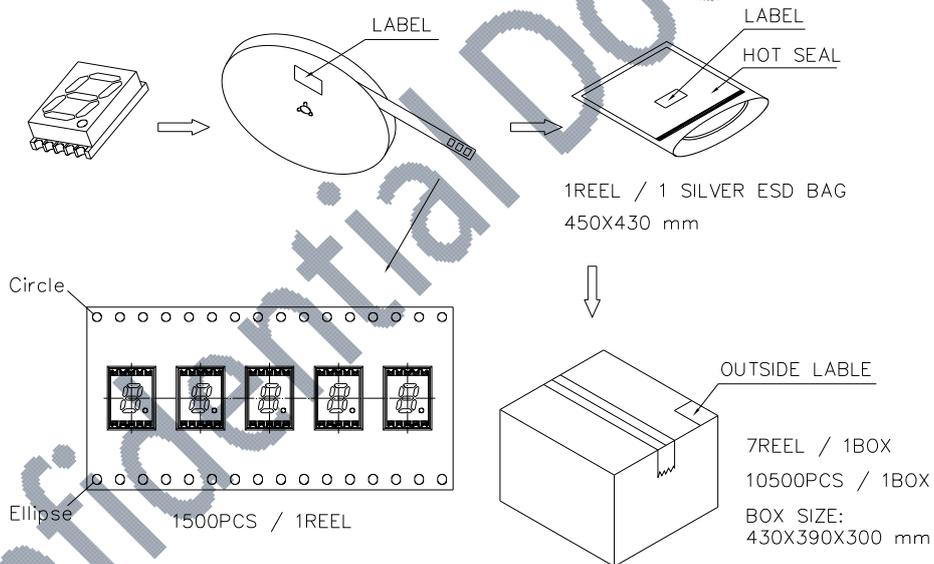

#### ● STORAGE CONDITION

In factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

After opened and not in factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION	STORAGE TIME
5°C ~ 30°C	Below 60%RH	Within 4 weeks (MSL as level 2a)