



[www.opledtw.com](http://www.opledtw.com)

**Opto Plus LED Corp.**  
**0.39" SMD Type LED Display**  
**OPS-S391-2SY-STT(R)-1.5-G(B)W**  
**OPS-S391-3SY-STT(R)-1.5-G(B)W**

● **EDIT HISTORY**

Version A: Mar. 24, 2025

Preliminary Spec.

Confidential Document



[www.opledtw.com](http://www.opledtw.com)

# Opto Plus LED Corp.

## 0.39" SMD Type LED Display

### OPS-S391-2SY-STT(R)-1.5-G(B)W

### OPS-S391-3SY-STT(R)-1.5-G(B)W

#### ● FEATURES

- 0.39 inch (10.0 mm) Digit Height.
- Low current operation.
- Excellent character appearance.
- Super thin SMD type.
- RoHS compliant, Pb Free.

#### ● DESCRIPTION

The device are 0.39 inch (10.00 mm) height single digit 7-segment displays.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright Yellow LED chip which are made from AlGaInP

On a transparent GaAs, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

#### ● DEVICE

PART NO.	DESCRIPTION
OPS-S391-2SY-STT-1.5-GW	Common Anode   Gray face   White segment   Top mount
OPS-S391-3SY-STT-1.5-GW	Common Cathode   Gray face   White segment   Top mount
OPS-S391-2SY-STT-1.5-BW	Common Anode   Black face   White segment   Top mount
OPS-S391-3SY-STT-1.5-BW	Common Cathode   Black face   White segment   Top mount
OPS-S391-2SY-STR-1.5-GW	Common Anode   Gray face   White segment   Reverse mount
OPS-S391-3SY-STR-1.5-GW	Common Cathode   Gray face   White segment   Reverse mount
OPS-S391-2SY-STR-1.5-BW	Common Anode   Black face   White segment   Reverse mount
OPS-S391-3SY-STR-1.5-BW	Common Cathode   Black face   White segment   Reverse mount

**RoHS Compliance**



**Pb Free.**



Opto Plus LED Corp. 7F-3, No.496, Bannan Road, Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C)  
Website: [www.opledtw.com](http://www.opledtw.com) E-mail: [sales@opledtw.com](mailto:sales@opledtw.com) Tel: 886-2-2222-5698 Fax: 886-2-2222-2566

Disclaimer:  
Subject to change without notice



[www.opledtw.com](http://www.opledtw.com)


# Opto Plus LED Corp.

## 0.39" SMD Type LED Display

### OPS-S391-2SY-STT(R)-1.5-G(B)W

### OPS-S391-3SY-STT(R)-1.5-G(B)W

#### ● MECHANICAL DIMENSIONS

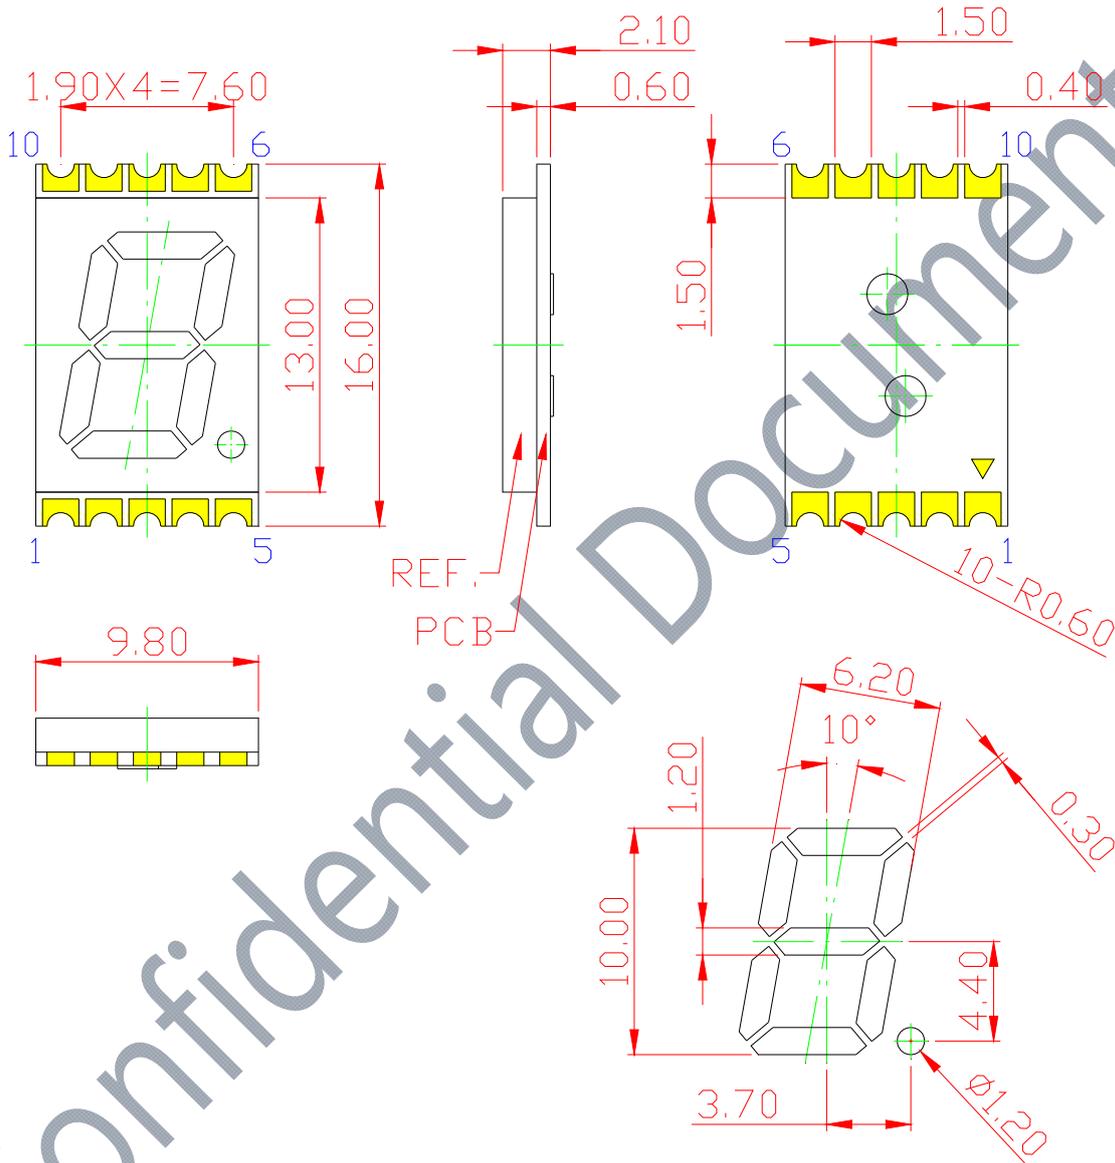

NOTES: All dimensions are in millimeters. Tolerances are  $\pm 0.25$  mm unless otherwise noted.



[www.opledtw.com](http://www.opledtw.com)

# Opto Plus LED Corp.

## 0.39" SMD Type LED Display

### OPS-S391-2SY-STT(R)-1.5-G(B)W





### OPS-S391-3SY-STT(R)-1.5-G(B)W

#### ● TYPICAL INTERNAL EQUIVALENT CIRCUIT


Recommended  
Top Mount  
Soldering Pattern

Recommended  
Reverse Mount  
Soldering Pattern


Turn On Color

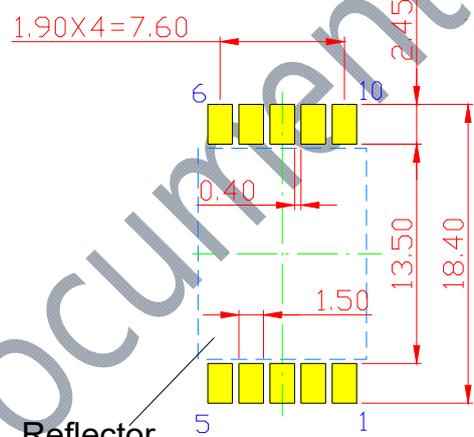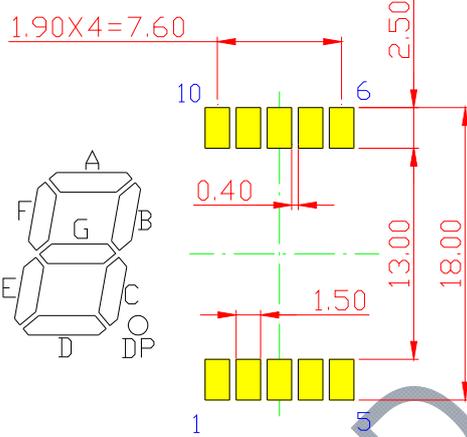

Reflector  
(Mounting Hole)

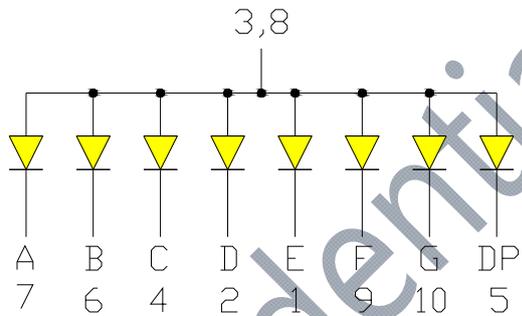

OPS-S391-2SY-STT(R)-1.5-G(B)W  
(Common Anode)

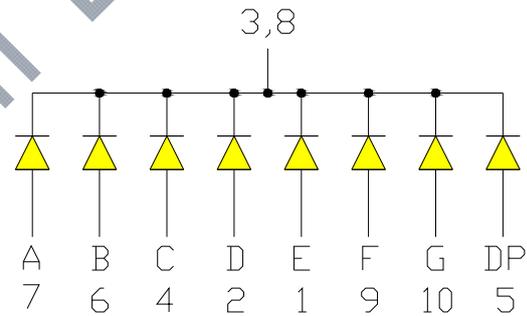

OPS-S391-3SY-STT(R)-1.5-G(B)W  
(Common Cathode)

※EMITTED COLOR : SUPER BRIGHT YELLOW



[www.opledtw.com](http://www.opledtw.com)

**Opto Plus LED Corp.**  
**0.39" SMD Type LED Display**  
**OPS-S391-2SY-STT(R)-1.5-G(B)W**  
**OPS-S391-3SY-STT(R)-1.5-G(B)W**

● **PRODUCT APPEARANCE**

The most common reflector color and segment color are show in below diagram.

-GW	-BW
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit [www.opledtw.com](http://www.opledtw.com) or contact [sales@opledtw.com](mailto:sales@opledtw.com) for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-S391-2SY-STT-1.5-GW	Common Anode   Gray face   White segment   Top mount
OPS-S391-3SY-STT-1.5-GW	Common Cathode   Gray face   White segment   Top mount
OPS-S391-2SY-STT-1.5-BW	Common Anode   Black face   White segment   Top mount
OPS-S391-3SY-STT-1.5-BW	Common Cathode   Black face   White segment   Top mount
OPS-S391-2SY-STR-1.5-GW	Common Anode   Gray face   White segment   Reverse mount
OPS-S391-3SY-STR-1.5-GW	Common Cathode   Gray face   White segment   Reverse mount
OPS-S391-2SY-STR-1.5-BW	Common Anode   Black face   White segment   Reverse mount
OPS-S391-3SY-STR-1.5-BW	Common Cathode   Black face   White segment   Reverse mount



[www.opledtw.com](http://www.opledtw.com)

**Opto Plus LED Corp.**  
**0.39" SMD Type LED Display**  
**OPS-S391-2SY-STT(R)-1.5-G(B)W**  
**OPS-S391-3SY-STT(R)-1.5-G(B)W**

● **SY: SUPER BRIGHT YELLOW (AlGaInP/GaAs)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P <sub>AD</sub>	48	mW
Continuous forward current	I <sub>AF</sub>	20	mA
Peak current (duty cycle 1/10, 1kHz)	I <sub>PF</sub>	40	mA
Reverse voltage	V <sub>R</sub>	5	V
Operating temperature	T <sub>OPR</sub>	-40 to +105	°C
Storage temperature	T <sub>STG</sub>	-40 to +105	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	V <sub>F</sub>	I <sub>F</sub> = 20mA	-	2.1	2.4	V
Reverse Current, (Per Dice)	I <sub>R</sub>	V <sub>R</sub> = 5V	-	-	10	µA
Peak Wavelength	λ <sub>P</sub>	I <sub>F</sub> = 20mA	-	593	-	nm
Dominant Wavelength	λ <sub>D</sub>	I <sub>F</sub> = 20mA	585	-	595	nm
Luminous Intensity	I <sub>v</sub>	I <sub>F</sub> = 20mA	20	-	70	mcd
Spectral Line Half-Bandwidth	Δλ	I <sub>F</sub> = 20mA	-	20	-	nm



[www.opledtw.com](http://www.opledtw.com)

**Opto Plus LED Corp.**  
**0.39" SMD Type LED Display**  
**OPS-S391-2SY-STT(R)-1.5-G(B)W**  
**OPS-S391-3SY-STT(R)-1.5-G(B)W**

● **SY: BIN GRADE (Unit : mcd) 20mA**

Super Bright Yellow	M	N	O
	20.0 – 40.0	40.1 – 55.0	55.1 - 70.0

● **SY: HUE GRADE ( $\lambda_D$  : nm)**

1	2	3
585.0 – 588.0	588.1 – 592.0	592.1 – 595.0

● **AVAILABLE BIN / HUE TABLE**

M1	N1	O1
M2	N2	O2
M3	N3	O3



[www.opledtw.com](http://www.opledtw.com)

# Opto Plus LED Corp.

## 0.39" SMD Type LED Display

### OPS-S391-2SY-STT(R)-1.5-G(B)W

### OPS-S391-3SY-STT(R)-1.5-G(B)W

#### ● SY: SUPER BRIGHT YELLOW (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves  
(25 °C Free Air Temperature Unless Otherwise Specified)

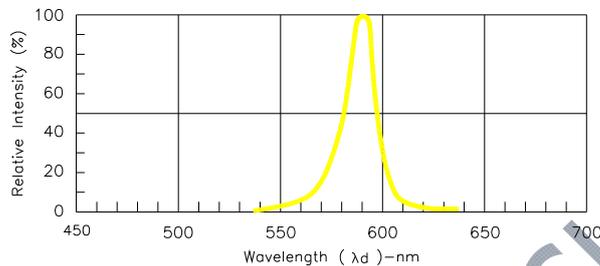


Fig.1-Relative Intensity VS. Wavelength

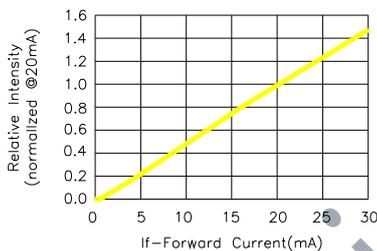


Fig.2-Relative Luminous Intensity vs. Forward Current

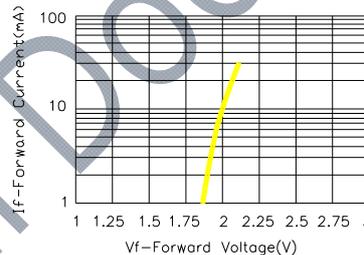


Fig.3-Forward Current vs. Forward Voltage

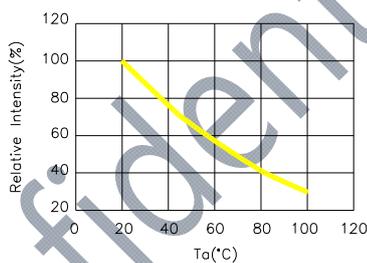


Fig.4-Relative Intensity(@20mA) vs. Ambient Temperature

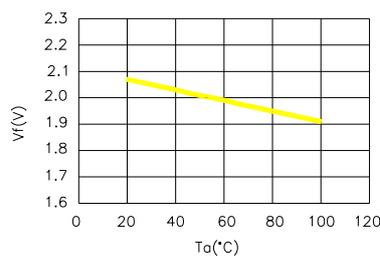


Fig.5-Forward Voltage(@20mA) vs. Ambient Temperature

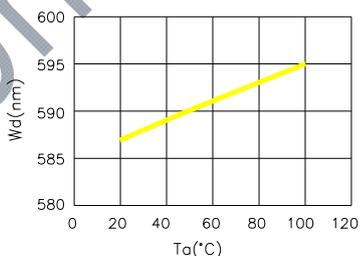


Fig.6-Dominant Wavelength(@20mA) VS. Ambient Temperature

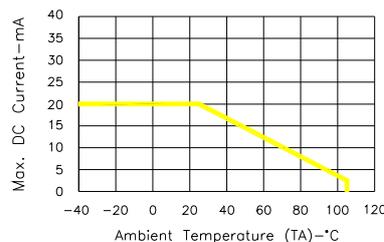


Fig.7-Max. Allowable DC Current VS. Ambient Temperature




[www.opledtw.com](http://www.opledtw.com)

**Opto Plus LED Corp.**  
**0.39" SMD Type LED Display**  
**OPS-S391-2SY-STT(R)-1.5-G(B)W**  
**OPS-S391-3SY-STT(R)-1.5-G(B)W**

● **SMT REFLOW SOLDERING INSTRUCTIONS**

SMT Soldering Profile

Pb free reflow soldering Profile

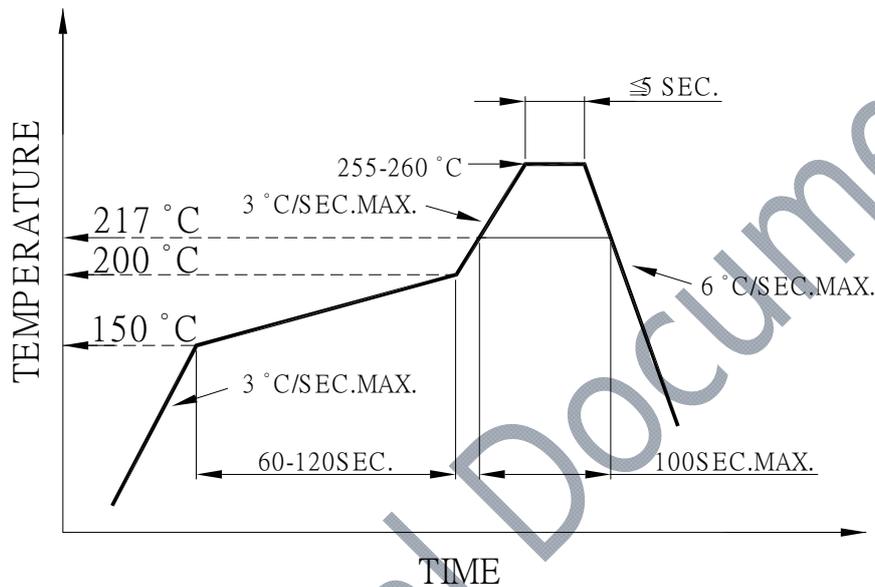


- We recommend the reflow temperature 245°C (+/- 5°C).  
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

● **SOLDERING IRON**

Basic spec is  $\leq 4$  sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● **REWORK**

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.



[www.opledtw.com](http://www.opledtw.com)


# Opto Plus LED Corp.

## 0.39" SMD Type LED Display

### OPS-S391-2SY-STT(R)-1.5-G(B)W

### OPS-S391-3SY-STT(R)-1.5-G(B)W

#### ● REEL DIMENSIONS

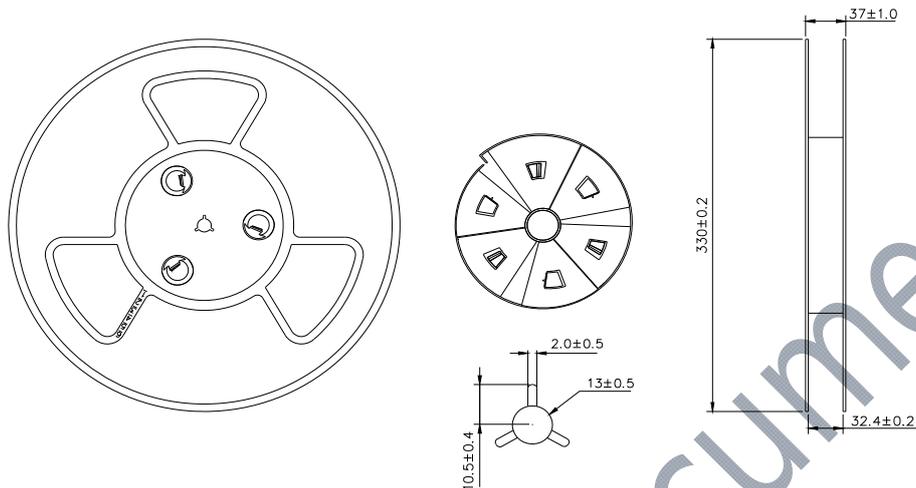

#### ● PACKING & LABEL SPECIFICATIONS

OPS-S391-2(3)XX-STT-1.5-BW Top Mount	OPS-S391-2(3)XX-STR-1.5-BW Reverse Mount	OPS-S391-2(3)XX-STT-1.5-BW OPS-S391-2(3)XX-STR-1.5-BW
<p>LABEL</p> <p>Circle</p> <p>Ellipse</p> <p>1200PCS / 1REEL</p>	<p>LABEL</p> <p>Circle</p> <p>Ellipse</p> <p>1200PCS / 1REEL</p>	<p>LABEL</p> <p>HOT SEAL</p> <p>1 REEL / 1 SILVER ESD BAG 450X430 mm</p> <p>OUTSIDE LABEL</p> <p>7 REEL / 1 BOX 8400PCS / 1 BOX BOX SIZE: 430X390X300 mm</p>

#### ● STORAGE CONDITION

In factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

After opened and not in factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION	STORAGE TIME
5°C ~ 30°C	Below 60%RH	Within 4 weeks (MSL as level 2a)