



Opto Plus LED Corp.
0.56'' SMD Type LED Display
OPS-S5620SB | OPS-S5621SB

● **EDIT HISTORY**

Version A: Nov. 30, 2020

Preliminary Spec.

Version B: Dec. 19, 2022

1. Modify electrical optical characteristics.

2. Modify curve graph.

Version C: May. 16, 2023

1. Modify electrical optical characteristics.

2. Modify bin grade data & available bin / hue table.



Opto Plus LED Corp.

0.56" SMD Type LED Display

OPS-S5620SB | OPS-S5621SB

● FEATURES

- 0.56 inch (14.20 mm) digit height.
- SMD type.
- Low current operation.
- RoHS Compliant, Pb Free.

● DESCRIPTION

The device are 0.56 inch (14.20 mm) height single digit 7-segment displays.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright Blue LED chip which are made from InGaN

On a transparent GaN, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

● DEVICE

PART NO.	DESCRIPTION
OPS-S5620SB-GW	Common Anode Gray face White segment
OPS-S5621SB-GW	Common Cathode Gray face White segment
OPS-S5620SB-BW	Common Anode Black face White segment
OPS-S5621SB-BW	Common Cathode Black face White segment

RoHS Compliance



Pb Free.






Opto Plus LED Corp.

0.56" SMD Type LED Display

OPS-S5620SB | OPS-S5621SB

● MECHANICAL DIMENSIONS

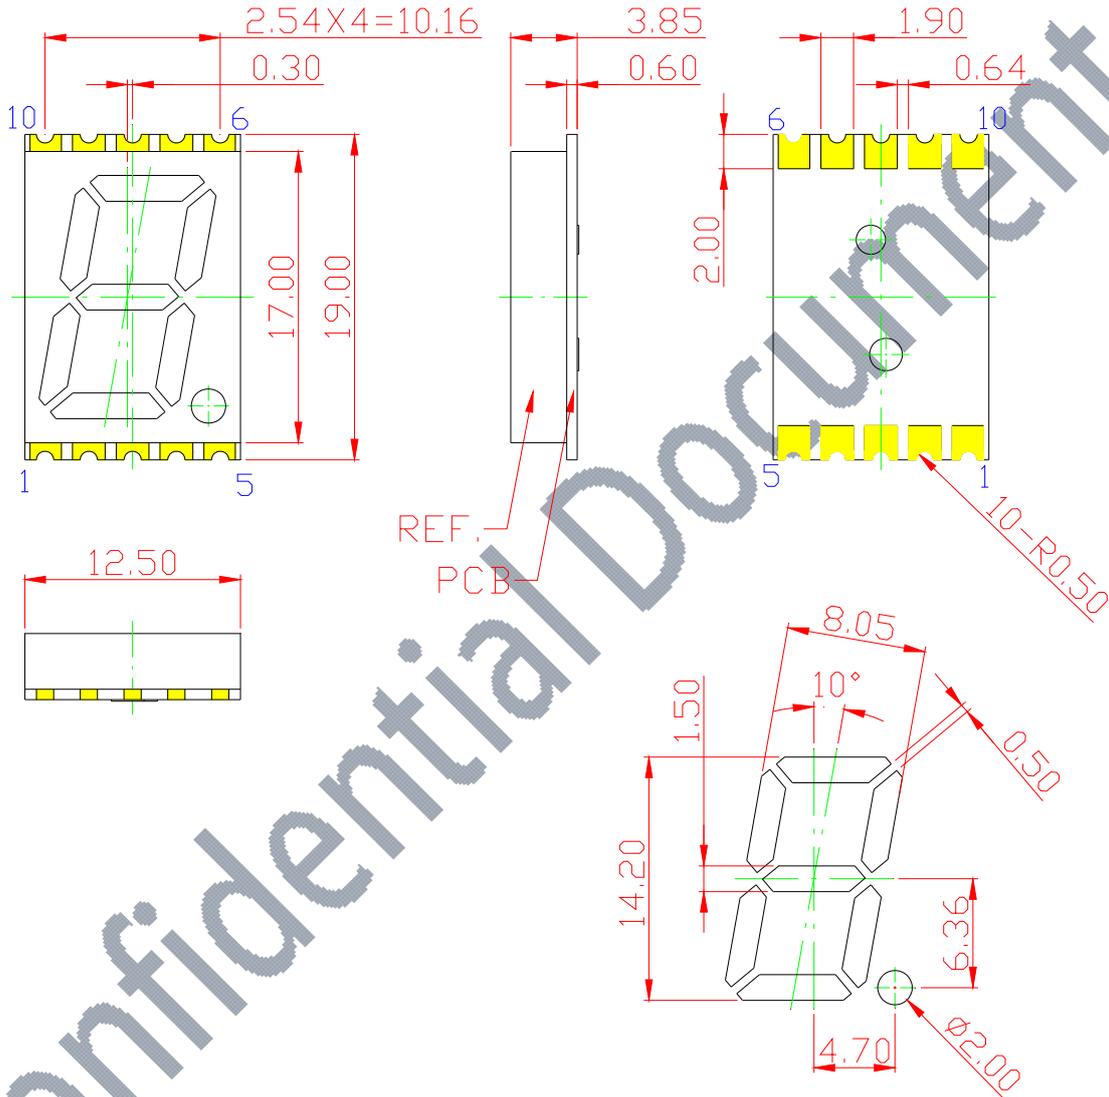

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.




Opto Plus LED Corp.

0.56" SMD Type LED Display

OPS-S5620SB | OPS-S5621SB

● TYPICAL INTERNAL EQUIVALENT CIRCUIT

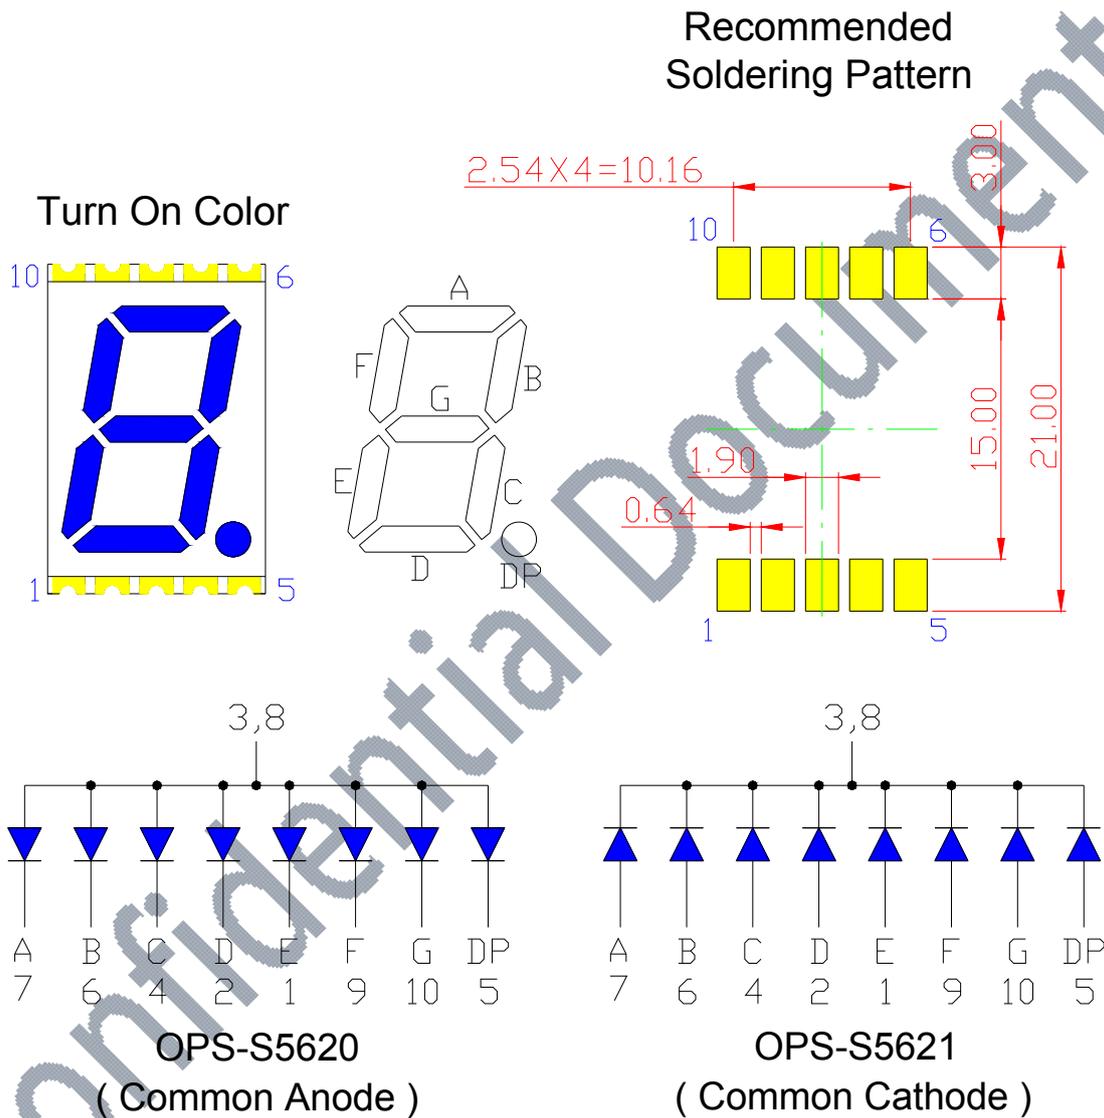



※EMITTED COLOR : SUPER BRIGHT BLUE



Opto Plus LED Corp. 0.56'' SMD Type LED Display OPS-S5620SB | OPS-S5621SB

● PRODUCT APPEARANCE

The most common reflector color and segment color are show in below diagram.

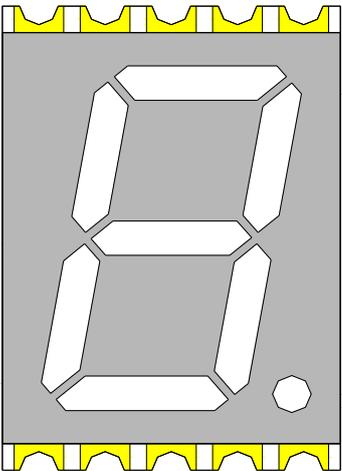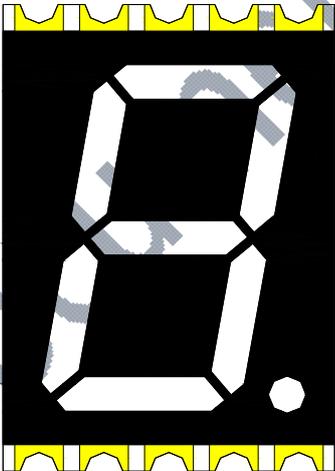-GW	-BW
	
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit www.opledtw.com or contact sales@opledtw.com for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-S5620SB-GW	Common Anode Gray face White segment
OPS-S5621SB-GW	Common Cathode Gray face White segment
OPS-S5620SB-BW	Common Anode Black face White segment
OPS-S5621SB-BW	Common Cathode Black face White segment



Opto Plus LED Corp.
0.56'' SMD Type LED Display
OPS-S5620SB | OPS-S5621SB

● **SB: SUPER BRIGHT BLUE (InGaN/GaN)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P_{AD}	90	mW
Continuous forward current	I_{AF}	30	mA
Peak current (duty cycle 1/10, 1kHz)	I_{PF}	60	mA
Reverse voltage	V_R	5	V
Operating temperature	T_{OPR}	-40 to +105	°C
Storage temperature	T_{STG}	-40 to +105	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	V_F	$I_F = 20\text{mA}$	-	3.0	3.4	V
Reverse Current, (Per Dice)	I_R	$V_R = 5\text{V}$	-	-	10	μA
Dominant Wavelength	λ_D	$I_F = 20\text{mA}$	464	-	474	nm
Luminous Intensity	I_V	$I_F = 20\text{mA}$	25	47	70	mcd
Spectral Line Half-Bandwidth	$\Delta\lambda$	$I_F = 20\text{mA}$	-	20	-	nm



Opto Plus LED Corp.
0.56'' SMD Type LED Display
OPS-S5620SB | OPS-S5621SB

● **SB: BIN GRADE (Unit : mcd) 20mA**

Super Bright Blue	L	M	N
	25.0 – 40.0	40.1 – 55.0	55.1 – 70.0

● **SB: HUE GRADE (λ_D : nm)**

1	2	3
464.0 - 467.0	467.1 - 470.0	470.1 - 474.0

● **AVAILABLE BIN / HUE TABLE**

L1	L2	L3
M1	M2	M3
N1	N2	N3



Opto Plus LED Corp.

0.56'' SMD Type LED Display

OPS-S5620SB | OPS-S5621SB

● SB: SUPER BRIGHT BLUE (InGaN/GaN) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

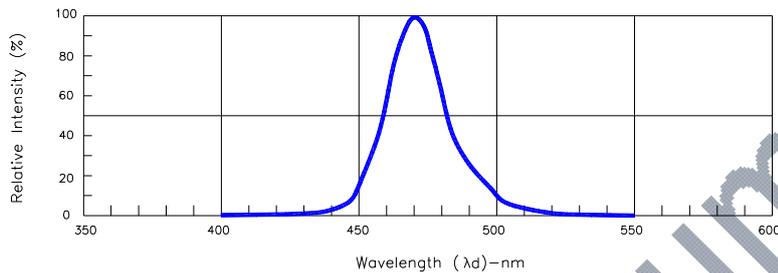


Fig.1-Relative Intensity VS. Wavelength

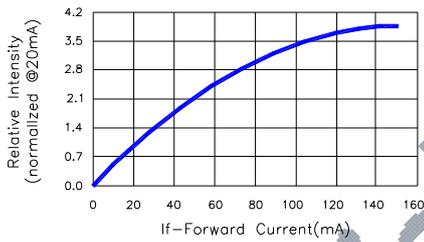


Fig.2-Relative Luminous Intensity vs. Forward Current

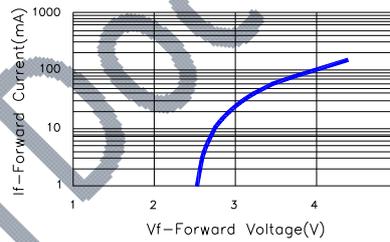


Fig.3-Forward Current vs. Forward Voltage

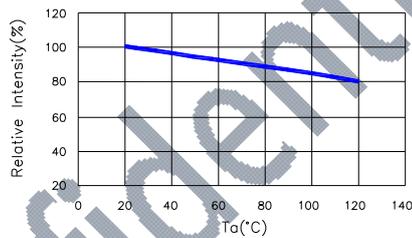


Fig.4-Relative Intensity(@20mA)VS. Ambient Temperature

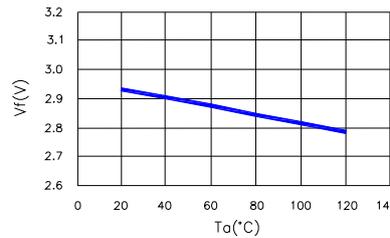


Fig.5-Forward Voltage(@20mA)VS. Ambient Temperature

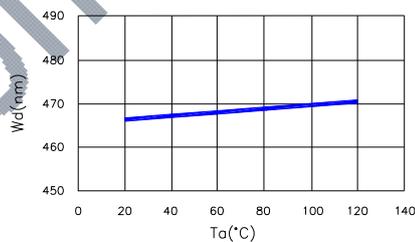


Fig.6-Dominant Wavelength(@20mA) VS. Ambient Temperature

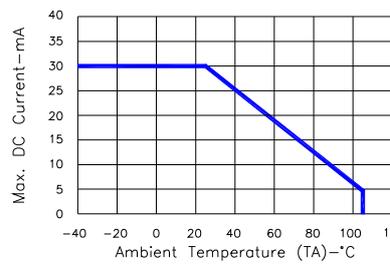


Fig.7-Max. Allowable DC Current VS. Ambient Temperature



Opto Plus LED Corp.


0.56" SMD Type LED Display

OPS-S5620SB | OPS-S5621SB

● SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile

Pb free reflow soldering Profile

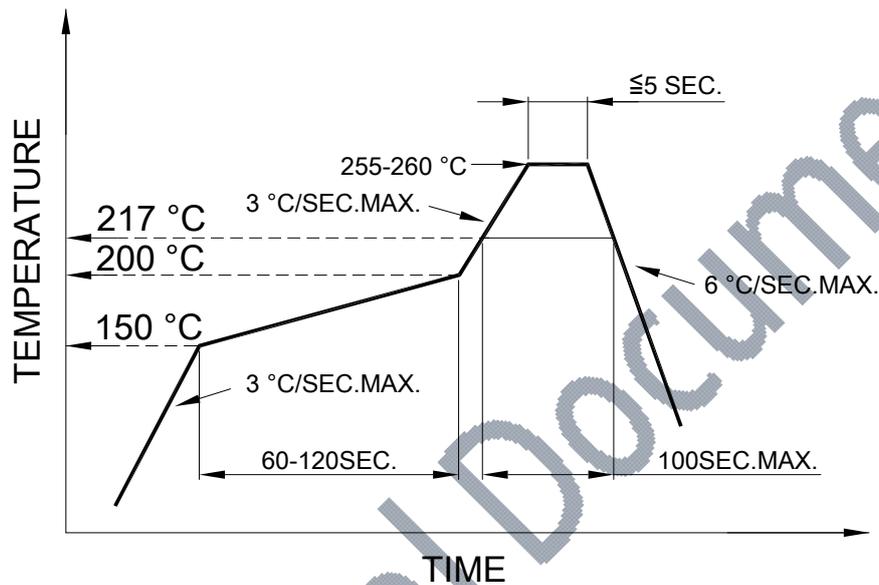

- We recommend the reflow temperature 245°C (+/- 5°C).
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

● SOLDERING IRON

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● REWORK

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.




Opto Plus LED Corp.


0.56" SMD Type LED Display

OPS-S5620SB | OPS-S5621SB

● REEL DIMENSIONS

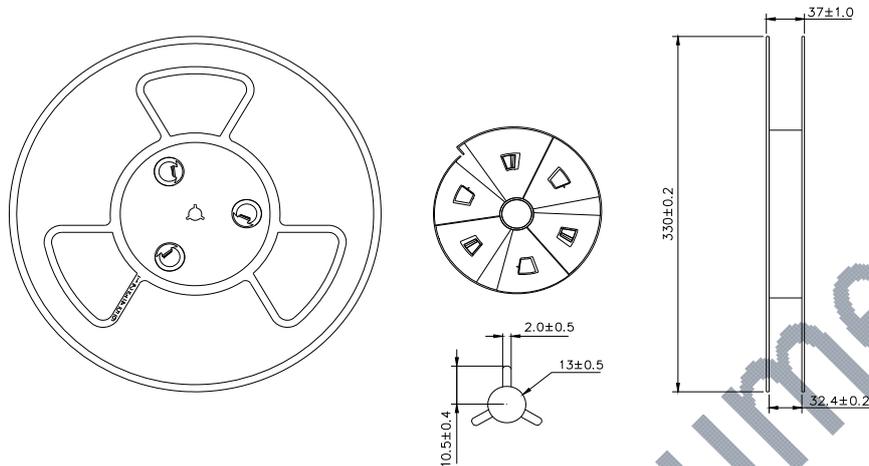

● PACKING & LABEL SPECIFICATIONS

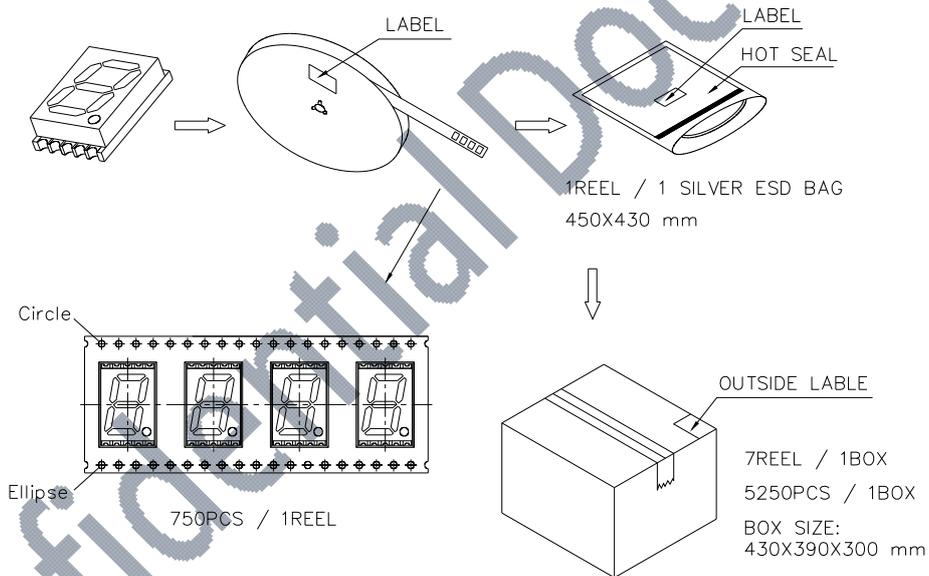

● STORAGE CONDITION

In factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

After opened and not in factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION	STORAGE TIME
5°C ~ 30°C	Below 60%RH	Within 4 weeks (MSL as level 2a)