



**Opto Plus LED Corp.**  
**0.30" SMD Type LED Display**  
**OPS-T3010SY | OPS-T3011SY**

● **EDIT HISTORY**

Version A: Nov. 06, 2020

Preliminary Spec.



# Opto Plus LED Corp.

## 0.30" SMD Type LED Display

### OPS-T3010SY | OPS-T3011SY

#### ● FEATURES

- 0.30 inch (7.62 mm) digit height.
- SMD type.
- Low current operation.
- RoHS Compliant, Pb Free.

#### ● DESCRIPTION

The device are 0.30 inch (7.62 mm) height triple digit 7-segment displays.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright Yellow LED chip which are made from AlGaInP

On a transparent GaAs, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

#### ● DEVICE

PART NO.	DESCRIPTION
OPS-T3010SY-GW	Common Anode   Gray face   White segment
OPS-T3011SY-GW	Common Cathode   Gray face   White segment
OPS-T3010SY-BW	Common Anode   Black face   White segment
OPS-T3011SY-BW	Common Cathode   Black face   White segment


#### RoHS Compliance



#### Pb Free.





### MECHANICAL DIMENSIONS

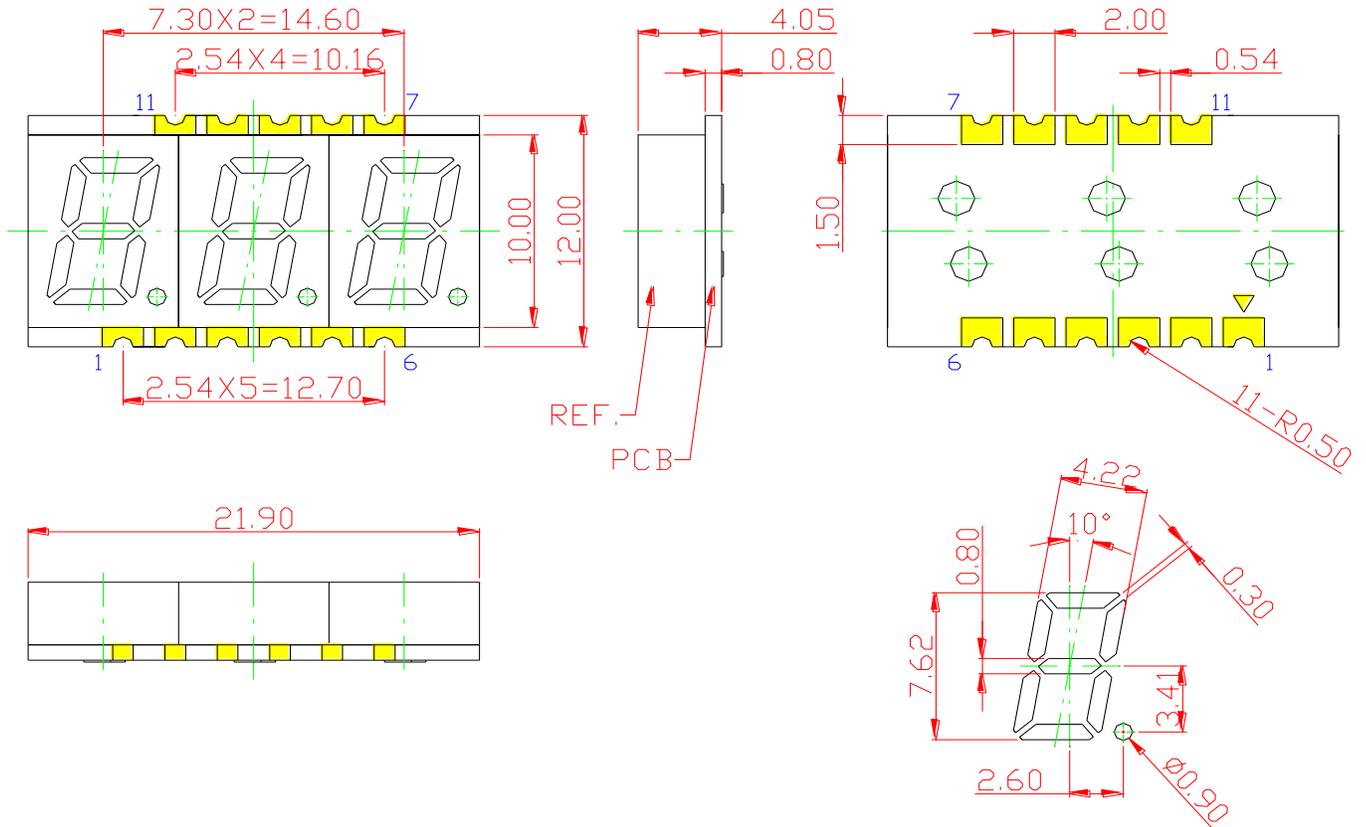




NOTES: All dimensions are in millimeters. Tolerances are  $\pm 0.25$  mm unless otherwise noted.

#### ● TYPICAL INTERNAL EQUIVALENT CIRCUIT

Turn On Color

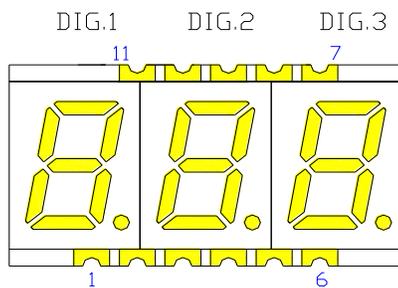

Recommended Soldering Pattern

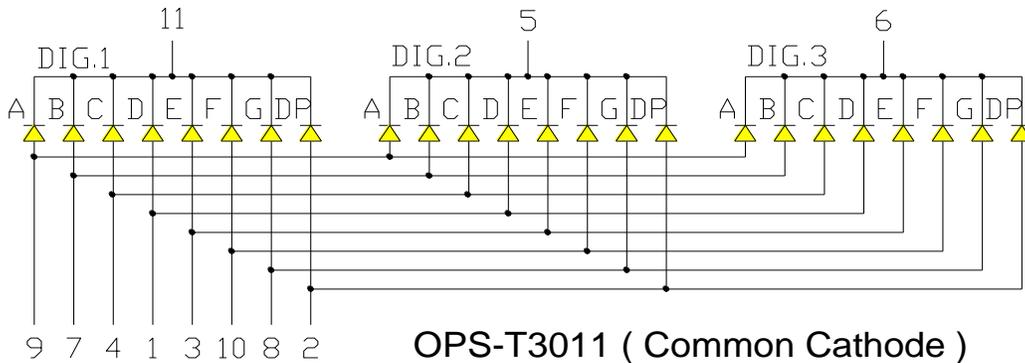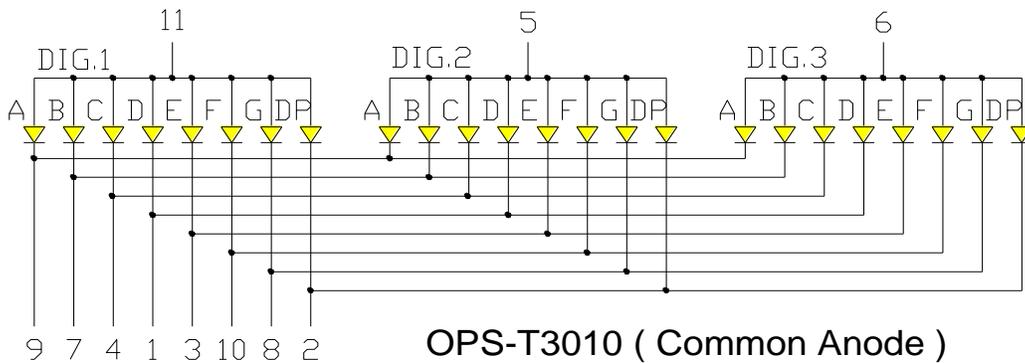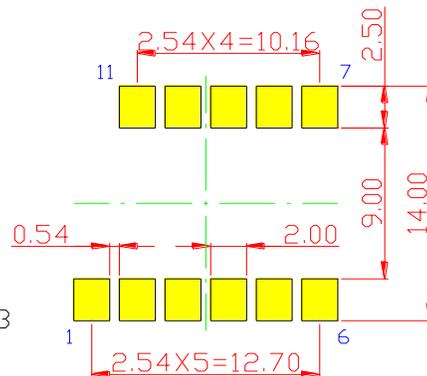

※EMITTED COLOR : SUPER BRIGHT YELLOW





# Opto Plus LED Corp.

## 0.30" SMD Type LED Display

### OPS-T3010SY | OPS-T3011SY

#### ● PRODUCT APPEARANCE

The most common reflector color and segment color are show in below diagram.

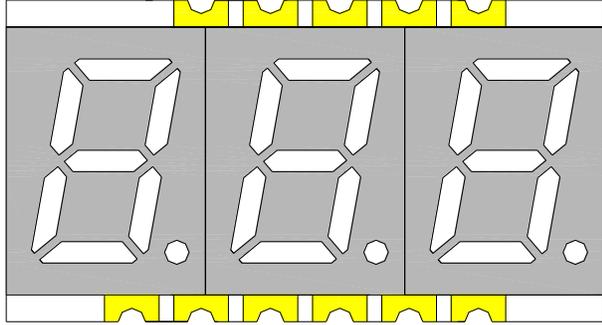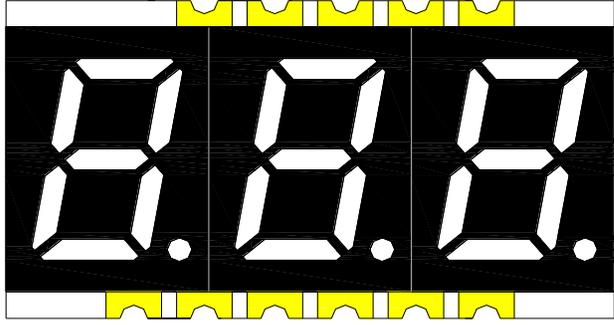-GW	-BW
	
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit [www.opledtw.com](http://www.opledtw.com) or contact [sales@opledtw.com](mailto:sales@opledtw.com) for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-T3010SY-GW	Common Anode   Gray face   White segment
OPS-T3011SY-GW	Common Cathode   Gray face   White segment
OPS-T3010SY-BW	Common Anode   Black face   White segment
OPS-T3011SY-BW	Common Cathode   Black face   White segment



# Opto Plus LED Corp.

## 0.30" SMD Type LED Display

### OPS-T3010SY | OPS-T3011SY

● **SY: SUPER BRIGHT YELLOW (AlGaInP/GaAs)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P <sub>AD</sub>	48	mW
Continuous forward current	I <sub>AF</sub>	20	mA
Peak current (duty cycle 1/10, 1kHz)	I <sub>PF</sub>	40	mA
Reverse voltage	V <sub>R</sub>	5	V
Operating temperature	T <sub>OPR</sub>	-40 to +105	°C
Storage temperature	T <sub>STG</sub>	-40 to +105	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	V <sub>F</sub>	I <sub>F</sub> =20mA	-	2.1	2.4	V
Reverse Current, (Per Dice)	I <sub>R</sub>	V <sub>R</sub> =5V	-	-	10	μA
Peak Wavelength	λ <sub>P</sub>	I <sub>F</sub> =20mA	-	593	-	nm
Dominant Wavelength	λ <sub>D</sub>	I <sub>F</sub> =20mA	585	-	595	nm
Luminous Intensity	I <sub>V</sub>	I <sub>F</sub> =20mA	15	30	45	mcd
Spectral Line Half-Bandwidth	Δλ	I <sub>F</sub> =20mA	-	20	-	nm



**Opto Plus LED Corp.**  
**0.30” SMD Type LED Display**  
**OPS-T3010SY | OPS-T3011SY**

● **SY: BIN GRADE (Unit : mcd) 20mA**

<b>Super Bright Yellow</b>	<b>H</b>	<b>I</b>	<b>J</b>
	15.0 – 25.0	25.1 -35.0	35.1 -45.0

● **SY: HUE GRADE ( $\lambda_D$  : nm)**

<b>1</b>	<b>2</b>	<b>3</b>
585.0 – 588.0	588.1 – 592.0	592.1 – 595.0

● **AVAILABLE BIN / HUE TABLE**

H1	H2	H3
I1	I2	I3
J1	J2	J3



# Opto Plus LED Corp.

## 0.30" SMD Type LED Display

### OPS-T3010SY | OPS-T3011SY

#### ● SY: SUPER BRIGHT YELLOW (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves  
(25 °C Free Air Temperature Unless Otherwise Specified)

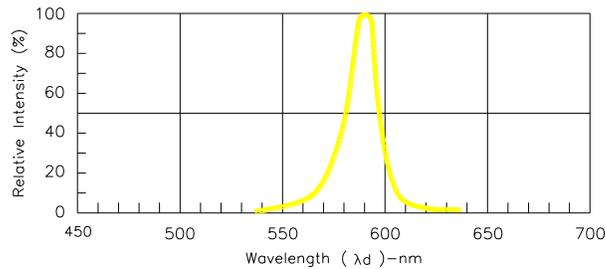


Fig.1-Relative Intensity VS. Wavelength

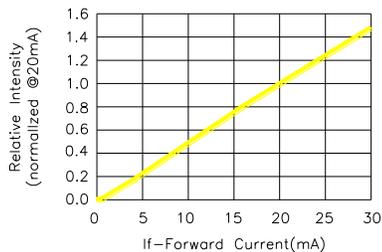


Fig.2-Relative Luminous Intensity vs. Forward Current

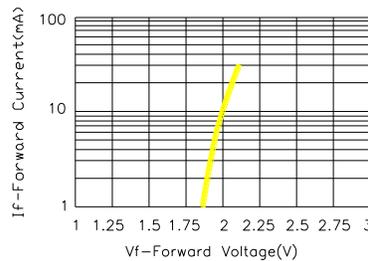


Fig.3-Forward Current vs. Forward Voltage

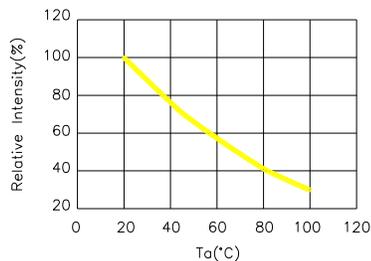


Fig.4-Relative Intensity(@20mA) vs. Ambient Temperature

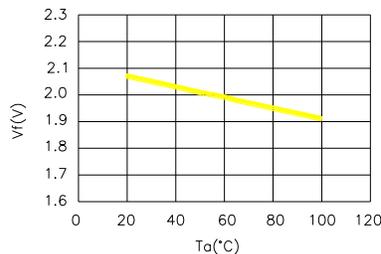


Fig.5-Forward Voltage(@20mA) vs. Ambient Temperature

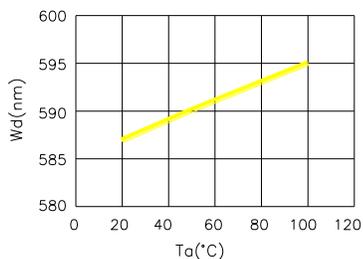


Fig.6-Dominant Wavelength(@20mA) VS. Ambient Temperature

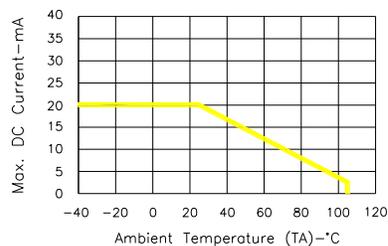


Fig.7-Max. Allowable DC Current VS. Ambient Temperature

## ● SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile

Pb free reflow soldering Profile



- We recommend the reflow temperature 245°C (+/- 5°C).  
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

## ● SOLDERING IRON

Basic spec is  $\leq 4$  sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

## ● REWORK

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.




# Opto Plus LED Corp.


## 0.30" SMD Type LED Display

### OPS-T3010SY | OPS-T3011SY

#### ● REEL DIMENSIONS

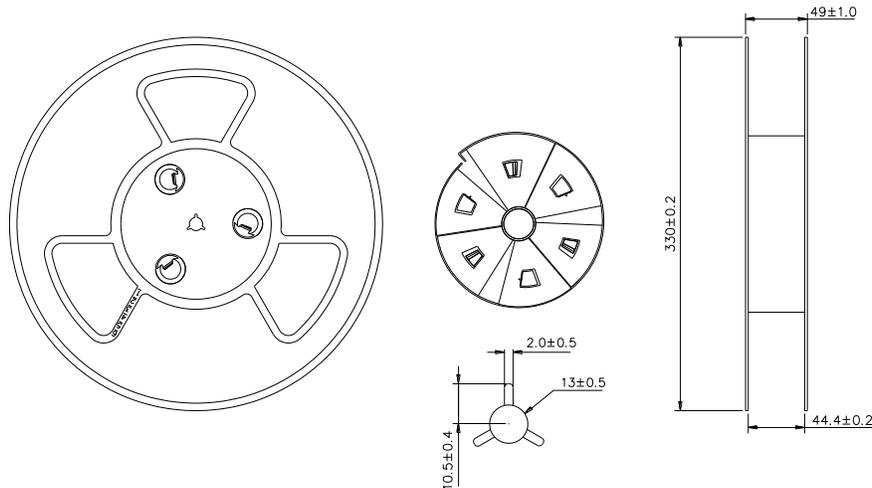

#### ● PACKING & LABEL SPECIFICATIONS

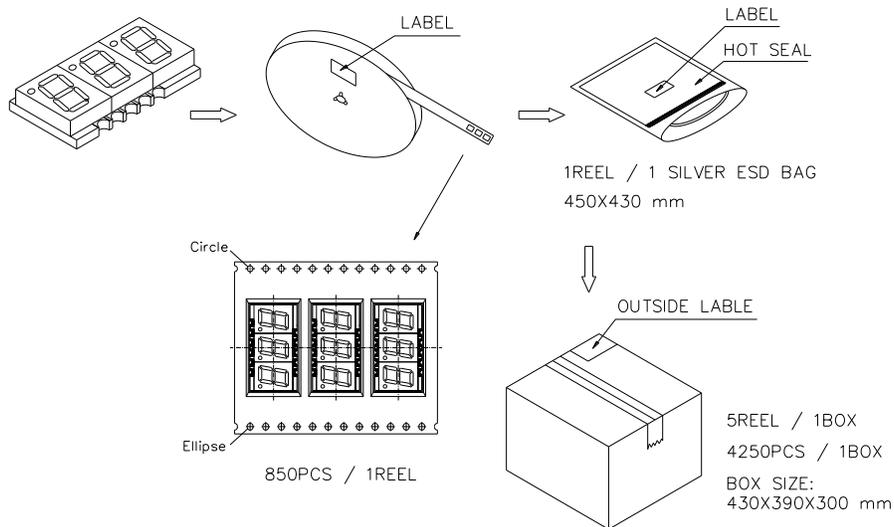

#### ● STORAGE CONDITION

In factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

After opened and not in factory original sealed bag package

TEMPERATURE CONDITION	HUMDITY CONDITION	STORAGE TIME
5°C ~ 30°C	Below 60%RH	Within 4 weeks (MSL as level 2a)