

[www.opledtw.com](http://www.opledtw.com)


**Opto Plus LED Corp.**  
**0.30" SMD Type LED Display**  
**OPS-T3050W3-STT(R)-1.5-G(B)W**  
**OPS-T3051W3-STT(R)-1.5-G(B)W**

● **EDIT HISTORY**

Version A: Mar. 24, 2025

Preliminary Spec.

Confidential Document

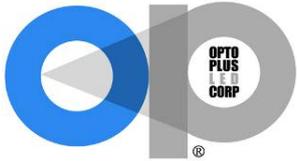

[www.opledtw.com](http://www.opledtw.com)

# Opto Plus LED Corp.

## 0.30" SMD Type LED Display

### OPS-T3050W3-STT(R)-1.5-G(B)W

### OPS-T3051W3-STT(R)-1.5-G(B)W

#### ● FEATURES

- 0.30 inch (7.62 mm) Digit Height.
- Low current operation.
- Excellent character appearance.
- Super thin SMD type.
- RoHS compliant, Pb Free.

#### ● DESCRIPTION

The device are 0.30 inch (7.62 mm) height triple digits 7-segment display.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright White LED chip which are made from InGaN

On a transparent GaN, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

#### ● DEVICE

PART NO.	DESCRIPTION
OPS-T3050W3-STT-1.5-GW	Common Anode   Gray face   White segment   Top mount
OPS-T3051W3-STT-1.5-GW	Common Cathode   Gray face   White segment   Top mount
OPS-T3050W3-STT-1.5-BW	Common Anode   Black face   White segment   Top mount
OPS-T3051W3-STT-1.5-BW	Common Cathode   Black face   White segment   Top mount
OPS-T3050W3-STR-1.5-GW	Common Anode   Gray face   White segment   Reverse mount
OPS-T3051W3-STR-1.5-GW	Common Cathode   Gray face   White segment   Reverse mount
OPS-T3050W3-STR-1.5-BW	Common Anode   Black face   White segment   Reverse mount
OPS-T3051W3-STR-1.5-BW	Common Cathode   Black face   White segment   Reverse mount

**RoHS Compliance**




**Pb Free.**



Opto Plus LED Corp. 7F-3, No.496, Bannan Road, Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C)  
Website: [www.opledtw.com](http://www.opledtw.com) E-mail: [sales@opledtw.com](mailto:sales@opledtw.com) Tel: 886-2-2222-5698 Fax: 886-2-2222-2566


Disclaimer:  
Subject to change without notice

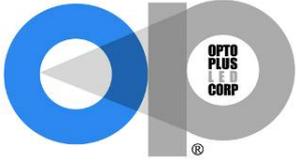


[www.opledtw.com](http://www.opledtw.com)

**Opto Plus LED Corp.**  
**0.30" SMD Type LED Display**  
**OPS-T3050W3-STT(R)-1.5-G(B)W**  
**OPS-T3051W3-STT(R)-1.5-G(B)W**

● **MECHANICAL DIMENSIONS**

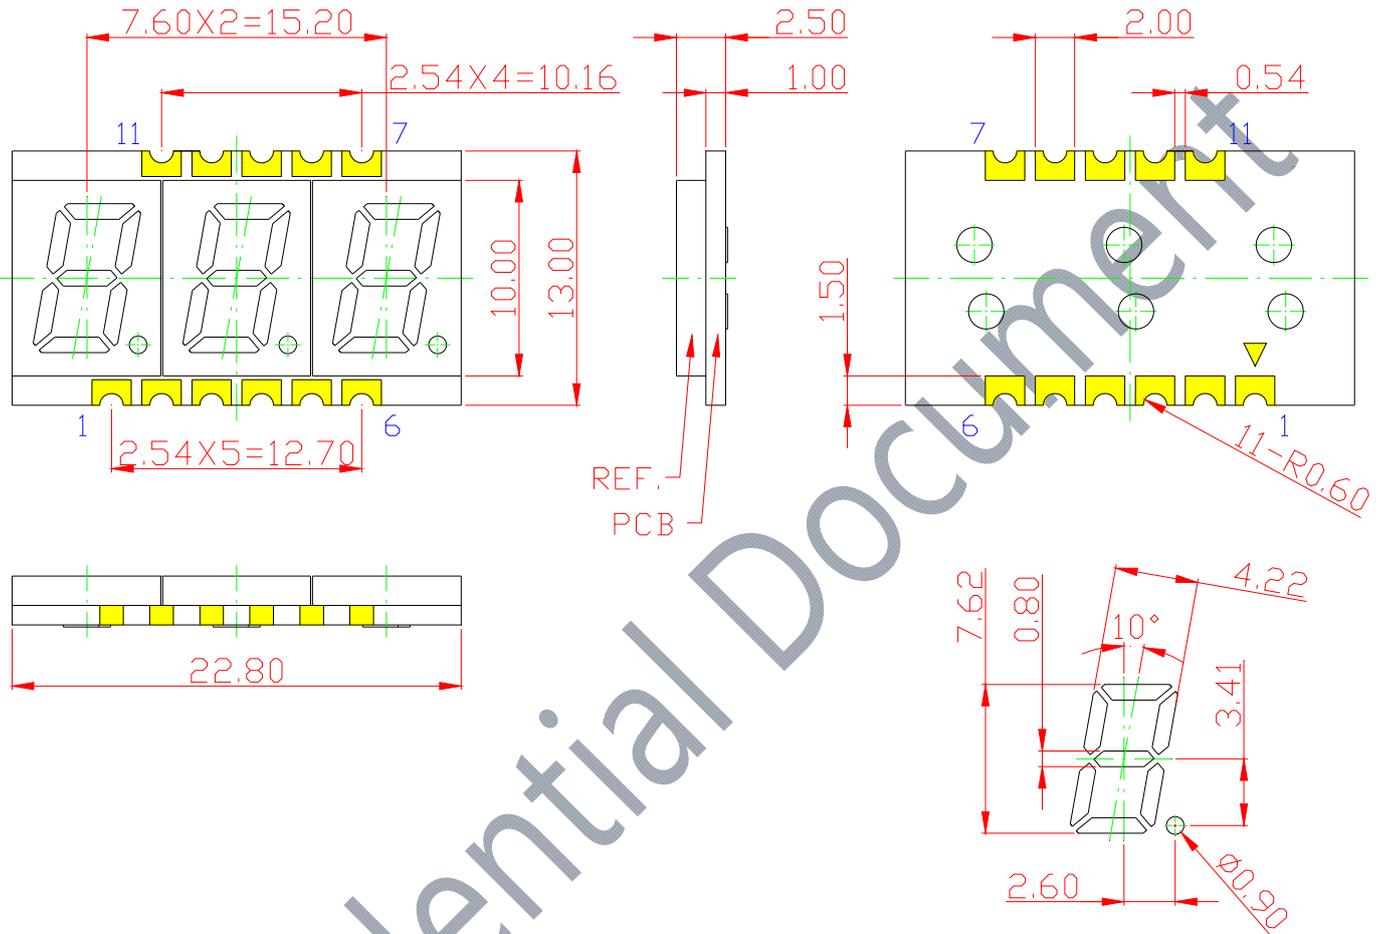

NOTES: All dimensions are in millimeters. Tolerances are  $\pm 0.25$  mm unless otherwise noted.

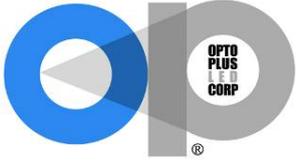

[www.opledtw.com](http://www.opledtw.com)


# Opto Plus LED Corp.

## 0.30" SMD Type LED Display


### OPS-T3050W3-STT(R)-1.5-G(B)W

### OPS-T3051W3-STT(R)-1.5-G(B)W

#### ● TYPICAL INTERNAL EQUIVALENT CIRCUIT

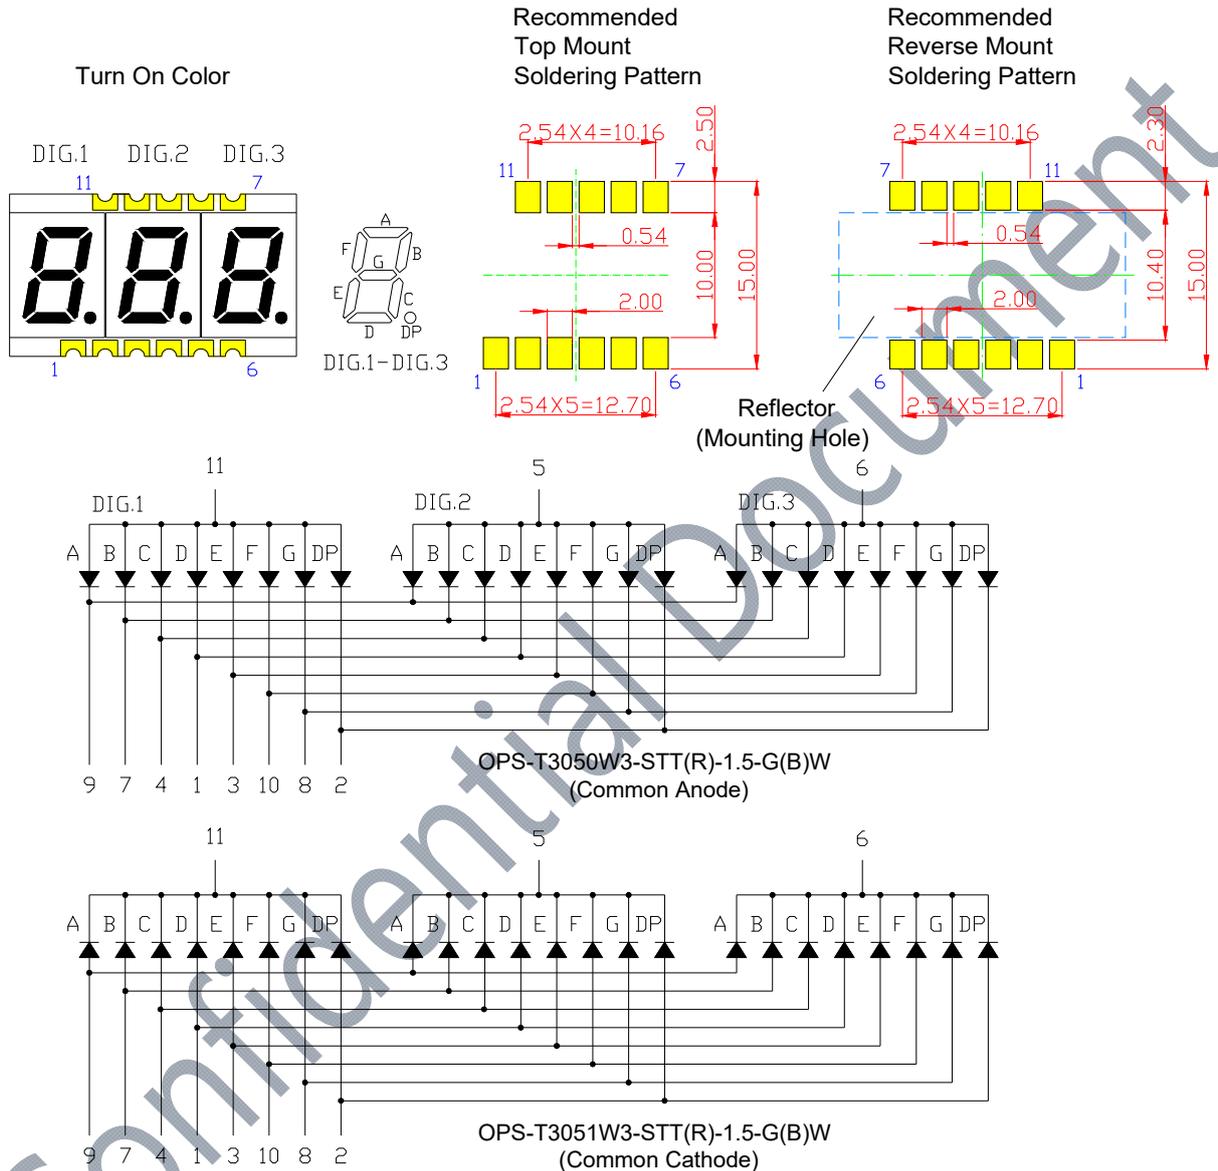

※EMITTED COLOR : SUPER BRIGHT WHITE

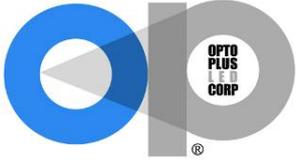

[www.opledtw.com](http://www.opledtw.com)

**Opto Plus LED Corp.**  
**0.30" SMD Type LED Display**  
**OPS-T3050W3-STT(R)-1.5-G(B)W**  
**OPS-T3051W3-STT(R)-1.5-G(B)W**

● **PRODUCT APPEARANCE**


The most common reflector color and segment color are show in below diagram.

-GW	-BW
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit [www.opledtw.com](http://www.opledtw.com) or contact [sales@opledtw.com](mailto:sales@opledtw.com) for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-T3050W3-STT-1.5-GW	Common Anode   Gray face   White segment   Top mount
OPS-T3051W3-STT-1.5-GW	Common Cathode   Gray face   White segment   Top mount
OPS-T3050W3-STT-1.5-BW	Common Anode   Black face   White segment   Top mount
OPS-T3051W3-STT-1.5-BW	Common Cathode   Black face   White segment   Top mount
OPS-T3050W3-STR-1.5-GW	Common Anode   Gray face   White segment   Reverse mount
OPS-T3051W3-STR-1.5-GW	Common Cathode   Gray face   White segment   Reverse mount
OPS-T3050W3-STR-1.5-BW	Common Anode   Black face   White segment   Reverse mount
OPS-T3051W3-STR-1.5-BW	Common Cathode   Black face   White segment   Reverse mount



[www.opledtw.com](http://www.opledtw.com)

**Opto Plus LED Corp.**  
**0.30" SMD Type LED Display**  
**OPS-T3050W3-STT(R)-1.5-G(B)W**  
**OPS-T3051W3-STT(R)-1.5-G(B)W**


● **W3: SUPER BRIGHT WHITE (InGaN/GaN)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C (Per SMD Chip)

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P <sub>D</sub>	16	mW
Forward current	I <sub>F</sub>	5	mA
Pulse forward current	I <sub>FP</sub>	15	mA
Reverse voltage	V <sub>R</sub>	5	V
Operating temperature	T <sub>OP</sub>	-40 to + 85	°C
Storage temperature	T <sub>ST</sub>	-40 to + 100	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C (Per SMD Chip)

Characteristic	Symbol	Condition	Min.	Type	Max.	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =5mA	-	2.8	3.2	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	-	-	10	μA
Luminous Intensity	I <sub>v</sub>	I <sub>F</sub> =5mA	71.5	150	226	mcd
Chromaticity Coordinate		X	-	0.3000		
		Y	-	0.2963		



[www.opledtw.com](http://www.opledtw.com)

**Opto Plus LED Corp.**  
**0.30" SMD Type LED Display**  
**OPS-T3050W3-STT(R)-1.5-G(B)W**  
**OPS-T3051W3-STT(R)-1.5-G(B)W**

● **WHITE: IV BIN (Unit : mcd) 5mA**

Super Bright White	1	2	3
	71.5 – 112.5	112.5 – 180.0	180.0 – 226.0
SMD BIN	Q	R	S1

Note: It maintains a tolerance of  $\pm 10\%$  on Luminous Intensity

● **WHITE: COLOR BIN**

CIE	X	Y	X	Y	X	Y
	0.2700	0.2325	0.2900	0.2600	0.3100	0.2875
	0.2700	0.2775	0.2900	0.3050	0.3100	0.3325
	0.2900	0.3050	0.3100	0.3325	0.3300	0.3600
	0.2900	0.2600	0.3100	0.2875	0.3300	0.3150
SMD BIN	C2		D1		D2	


Note: It maintains a tolerance of  $x, y \pm 0.007$

● **FORWARD VOLTAGE (VF) BIN:**

BIN CODE	G1	G2	G3	G4
SPEC. RANGE	2.4-2.5	2.5-2.6	2.6-2.7	2.7-2.8

BIN CODE	H1	H2	H3	H4
SPEC. RANGE	2.8-2.9	2.9-3.0	3.0-3.1	3.1-3.2


Note: It maintains a tolerance of  $\pm 0.05V$  on forward voltage measurements

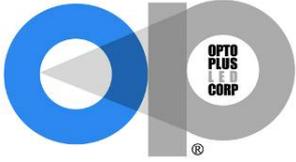

[www.opledtw.com](http://www.opledtw.com)


**Opto Plus LED Corp.**  
**0.30" SMD Type LED Display**  
**OPS-T3050W3-STT(R)-1.5-G(B)W**  
**OPS-T3051W3-STT(R)-1.5-G(B)W**

● **CHROMATICITY COORDINATE:**

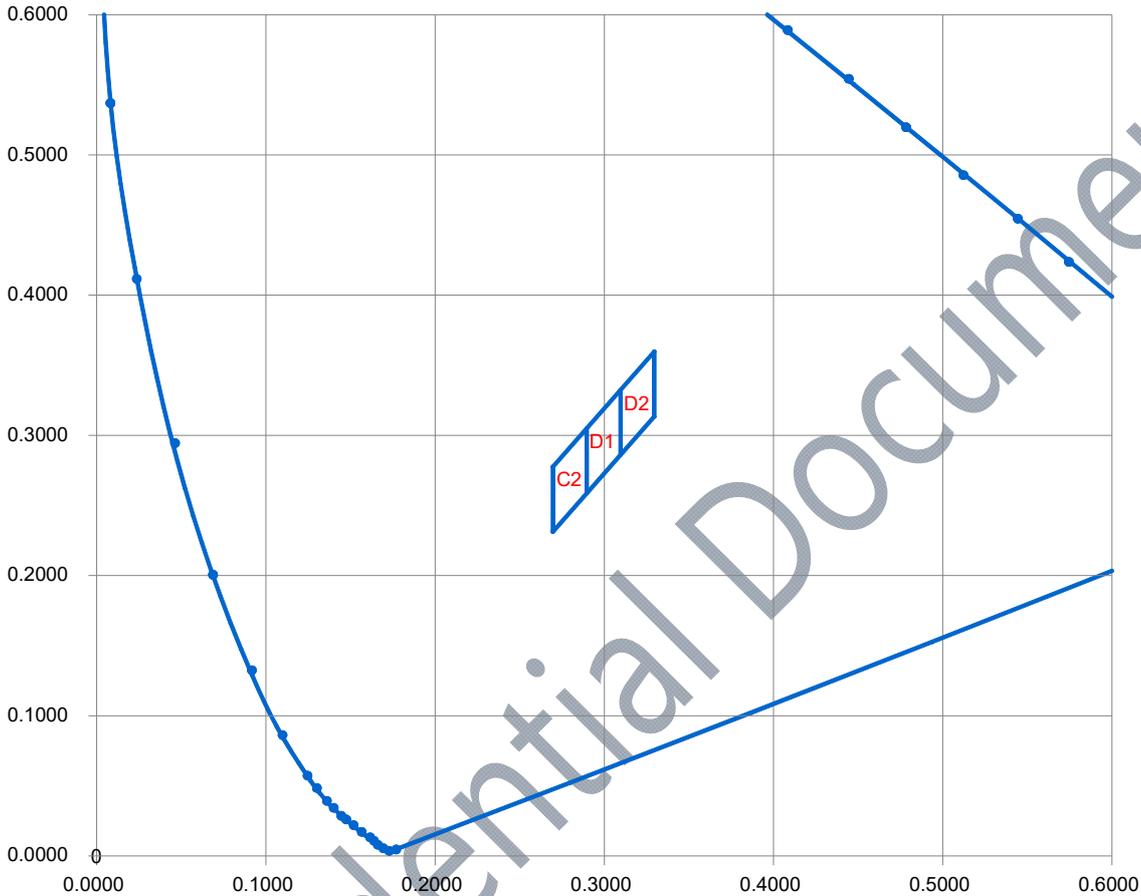

● **AVAILABLE BIN / HUE TABLE**

1C2	2C2	3C2
1D1	2D1	3D1
1D2	2D2	3D2

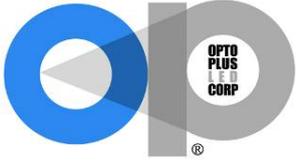

[www.opledtw.com](http://www.opledtw.com)

# Opto Plus LED Corp.


## 0.30" SMD Type LED Display


### OPS-T3050W3-STT(R)-1.5-G(B)W

### OPS-T3051W3-STT(R)-1.5-G(B)W

#### ● W3: SUPER BRIGHT WHITE (InGaN/GaN) CURVE

Typical Electro-optical Characteristic Curves  
(25 °C Free Air Temperature Unless Otherwise Specified)

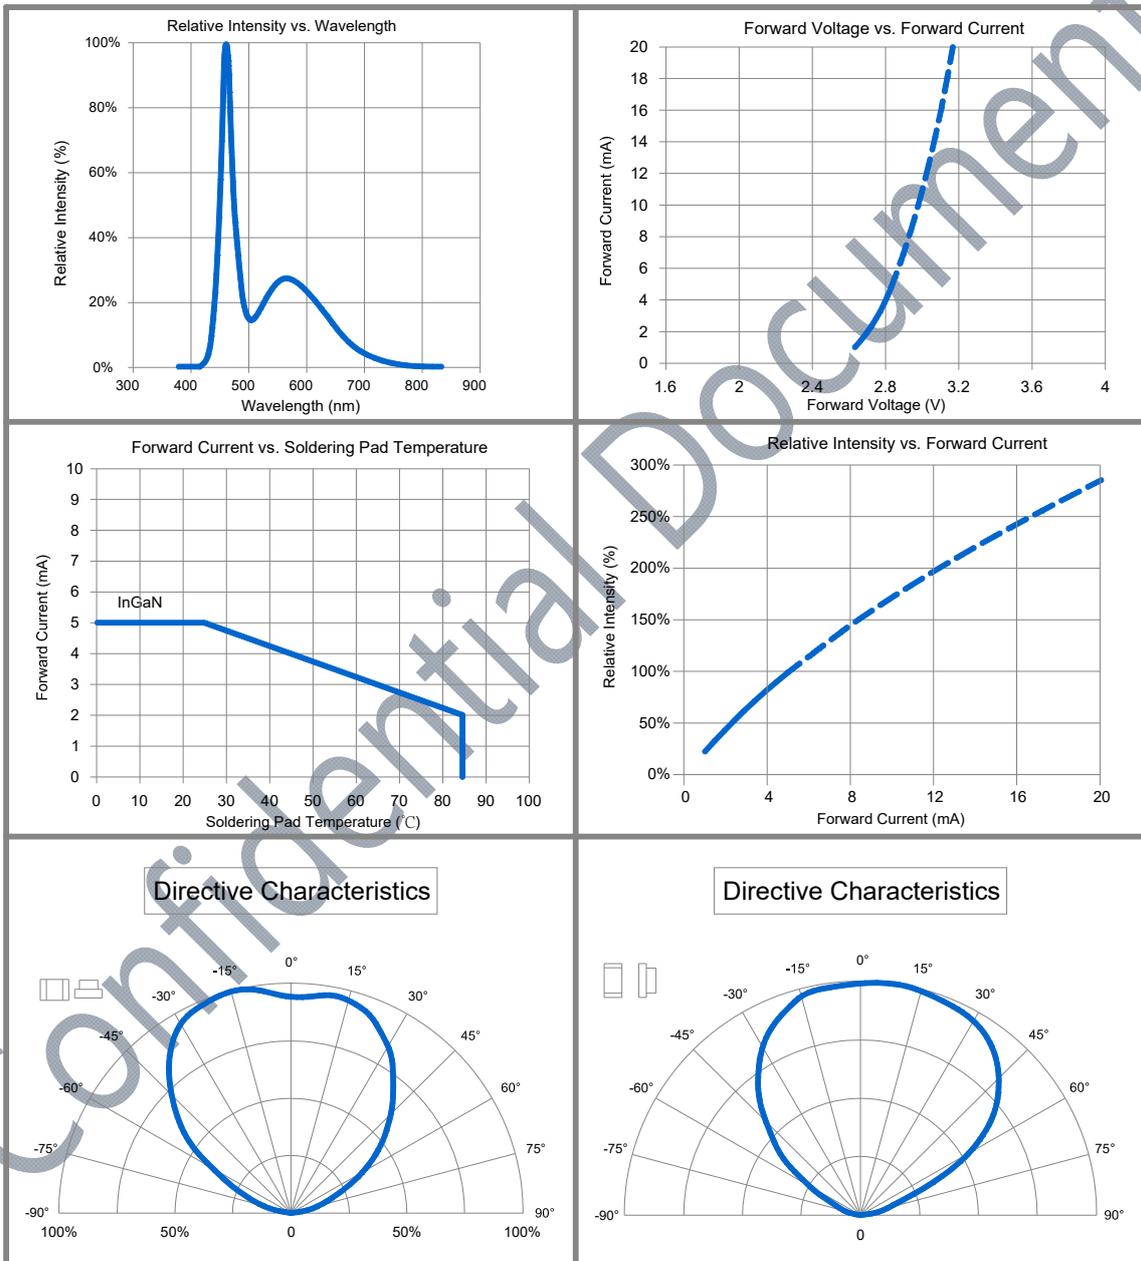




[www.opledtw.com](http://www.opledtw.com)

**Opto Plus LED Corp.**  
**0.30" SMD Type LED Display**  
**OPS-T3050W3-STT(R)-1.5-G(B)W**  
**OPS-T3051W3-STT(R)-1.5-G(B)W**

● **SMT REFLOW SOLDERING INSTRUCTIONS**

SMT Soldering Profile

Pb free reflow soldering Profile

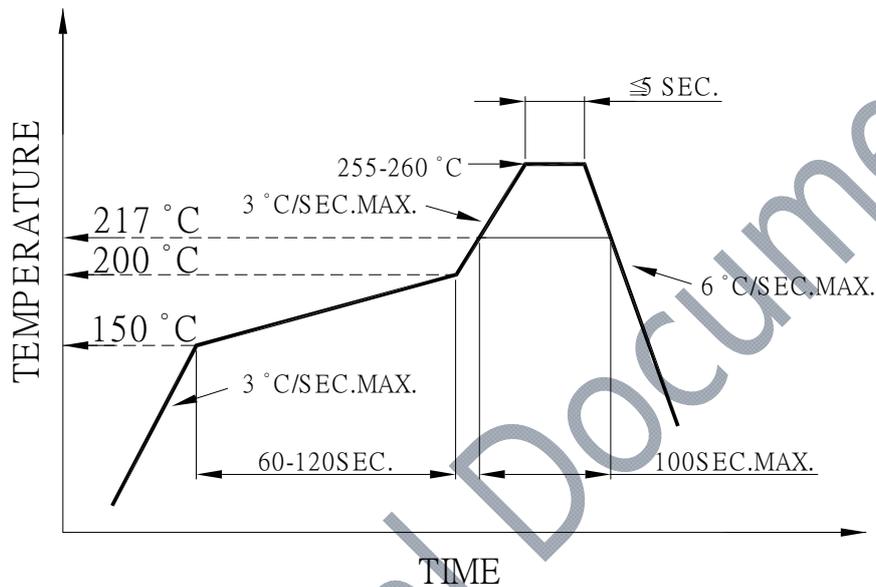


- We recommend the reflow temperature 245°C (+/- 5°C).  
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

● **SOLDERING IRON**

Basic spec is  $\leq 4$  sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● **REWORK**

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.



[www.opledtw.com](http://www.opledtw.com)


# Opto Plus LED Corp.

## 0.30" SMD Type LED Display


### OPS-T3050W3-STT(R)-1.5-G(B)W

### OPS-T3051W3-STT(R)-1.5-G(B)W

### ● REEL DIMENSIONS

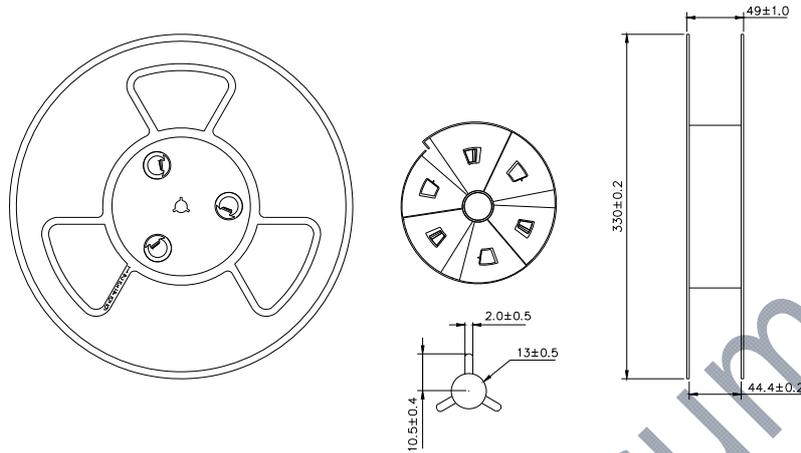

### ● PACKING & LABEL SPECIFICATIONS

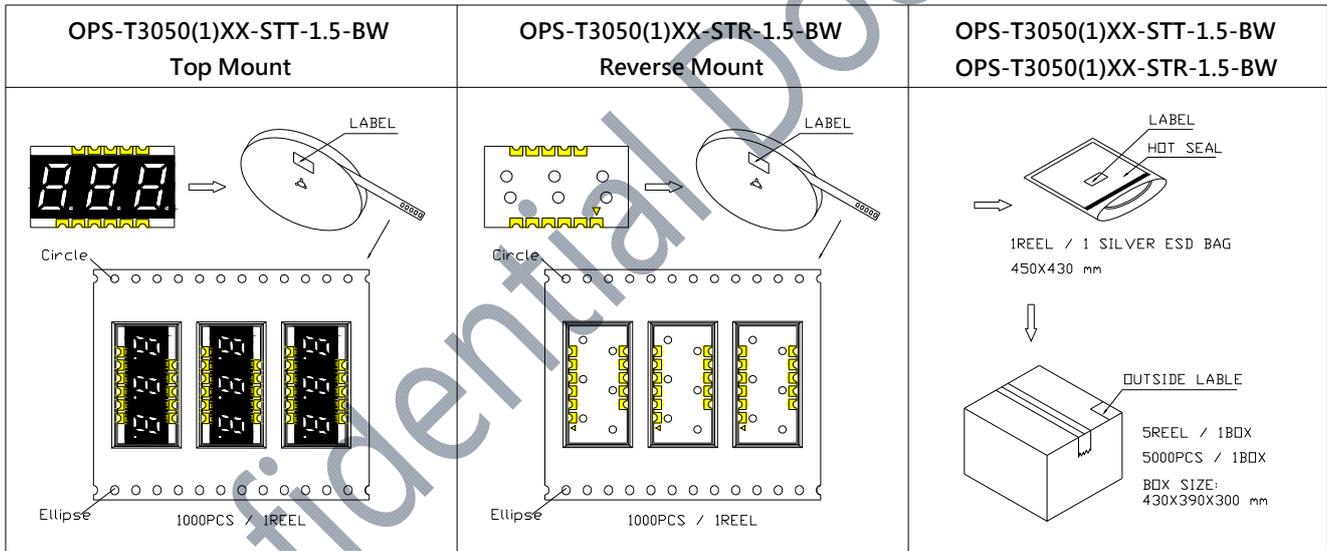

### ● STORAGE CONDITION

In factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

After opened and not in factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION	STORAGE TIME
5°C ~ 30°C	Below 60%RH	Within 4 weeks (MSL as level 2a)