

# Single-LED super bright

10-2413.1134R

Distribution by  
DigiKey

**DigiKey**



<https://digikey.eao.com/component/10-2413.113...>

Your product:

---



## 10-2413.1134R

### Single-LED super bright

#### OPERATING-/INDICATION PART

**Illumination colour:** Yellow

#### ELECTRICAL CHARACTERISTICS

**Operating voltage:** 28 V AC/DC +10%

**Operation current:** 14 mA  $\pm$ 15 %

**Lumi. Intensity:** 4200 mcd

#### MECHANICAL CHARACTERISTICS

**Weight:** 0.002 kg

#### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

#### OTHER


**Short Description:** Single-LED super bright, BA9s, Yellow, 28 V AC/DC +10%

**Kind of illumination:** Single\_LED super bright


**Product attributes:** The max. overall length of the lamp may not exceed 25mm

**Hints:** The specified 12, 24, 28, 48 VAC/DC versions are built with a bridge rectifier  
Electrical and optical data are measured at 25 °C  
Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

**Wiring diagrams:**

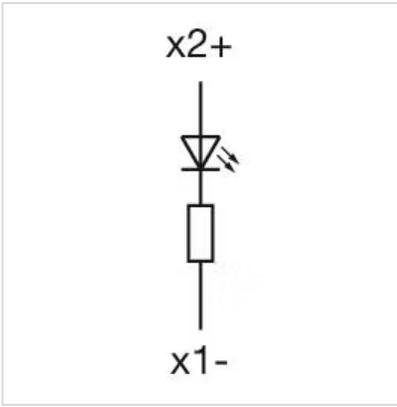

**Dimension drawings:**

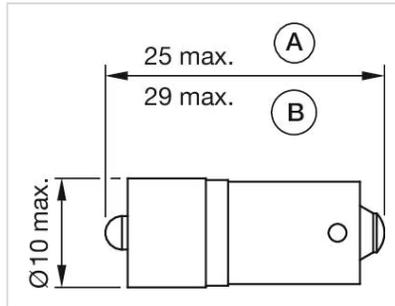

A = (standard)  
B = (super bright)