

## STRADELLA-8-HV-T4B

Wide IESNA Type IV forward-throw beam for wide area lighting like car parks. Variant with improved creepage distance for high voltage circuit designs.

### SPECIFICATION:

Dimensions	49.5 x 49.5
Height	5.8 mm
Fastening	pin, screw
ROHS compliant	yes ⓘ




### MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
STRADELLA-8-HV-T4B	Multi-lens	PMMA	clear		

### ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C15960_STRADELLA-8-HV-T4B » Box size: 480 x 280 x 300 mm	800	160	160	7.0

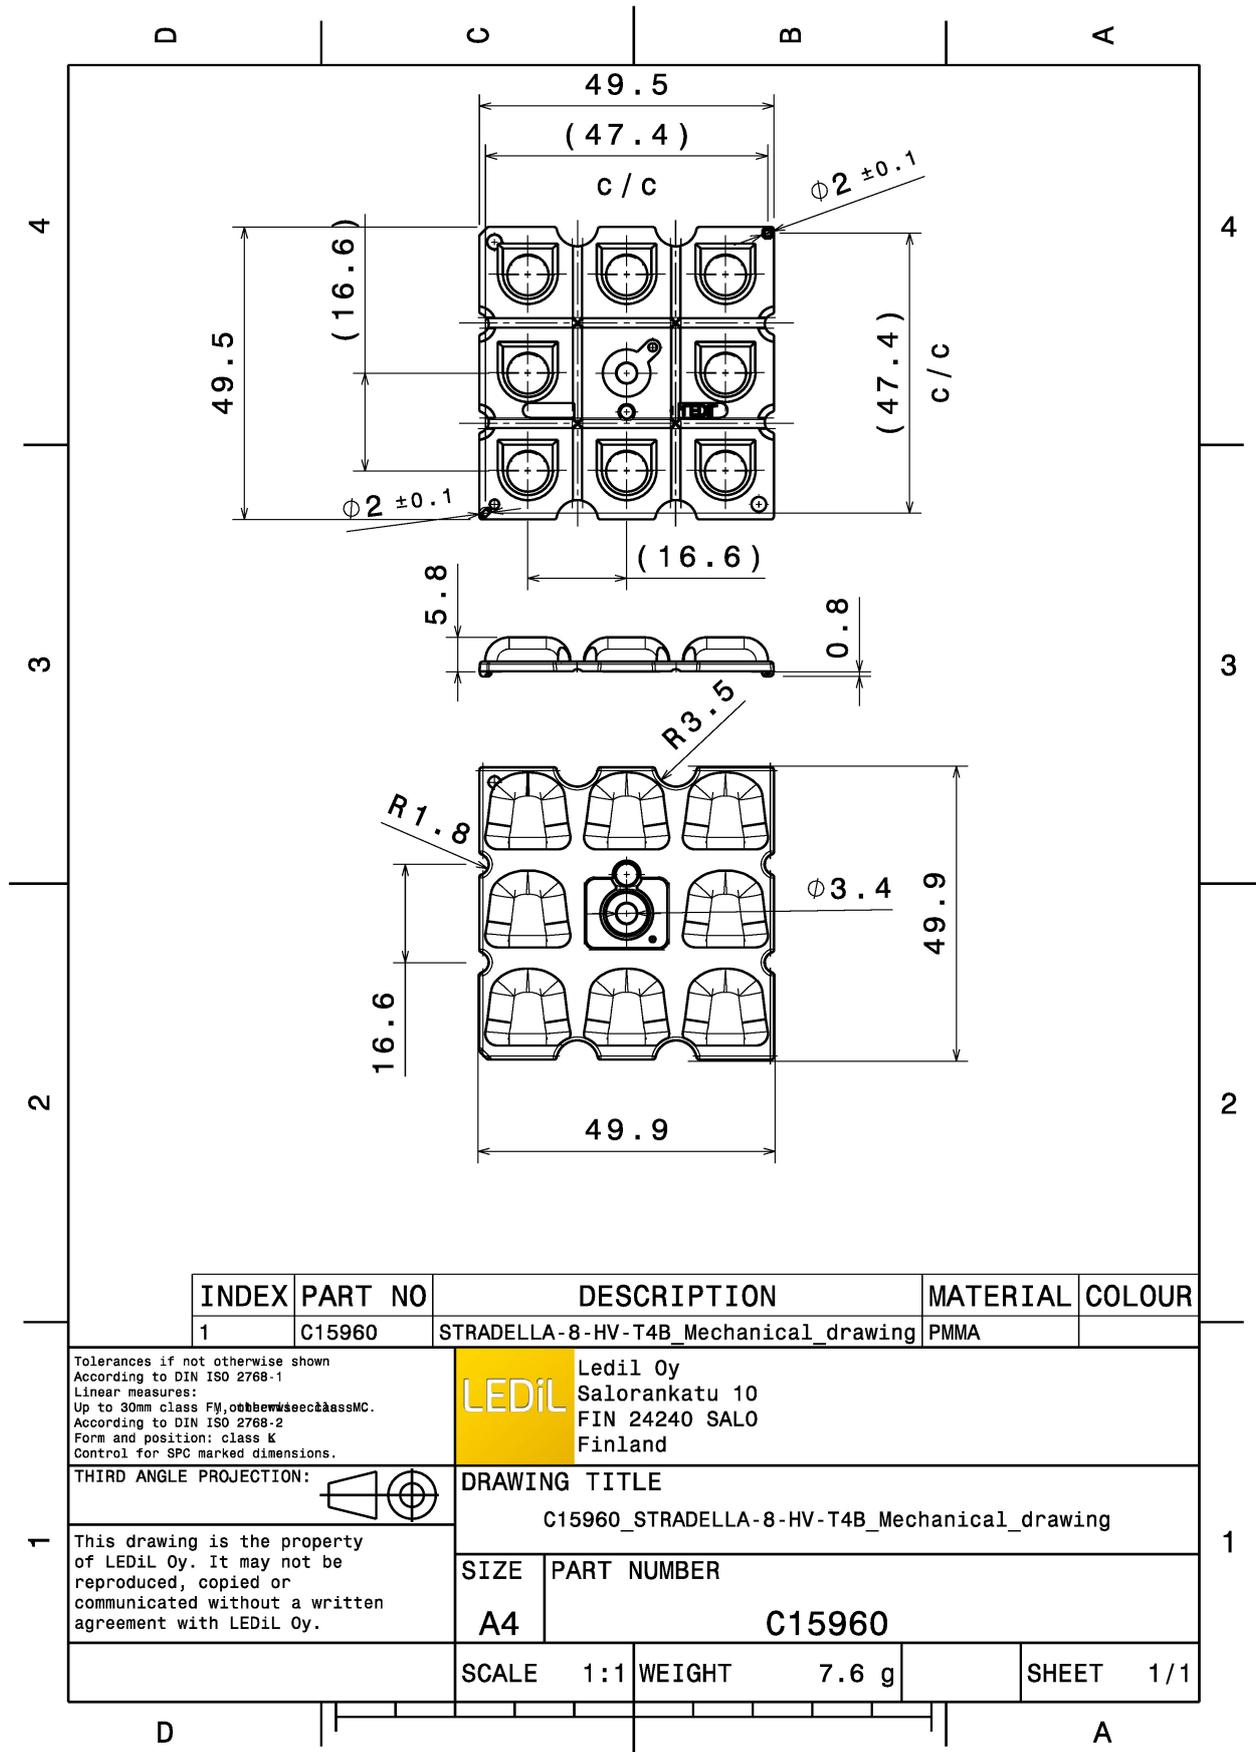


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

#### OPTICAL RESULTS (MEASURED):




LED JB3030 HE B Class  
 FWHM / FWTM Asymmetric  
 Efficiency 97 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

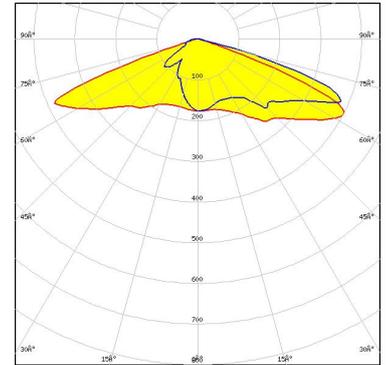

Light distribution files




LED XD16  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

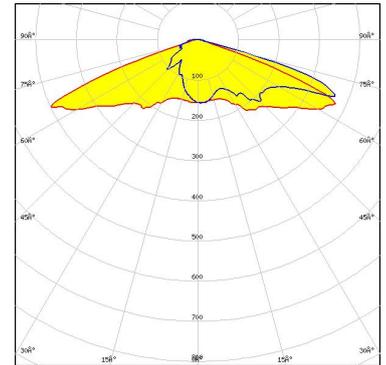

Light distribution files



LED XT-E  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

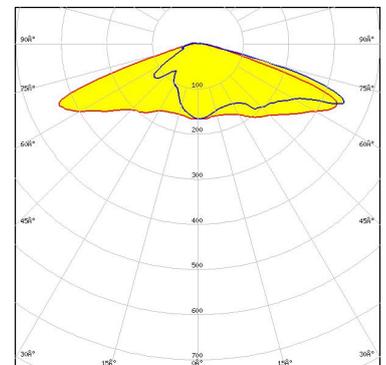


Light distribution files

#### OPTICAL RESULTS (MEASURED):

#### inventronics


LED PL-BRICK HP 3x8 Stradella-8  
FWHM / FWTM Asymmetric  
Efficiency 97 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

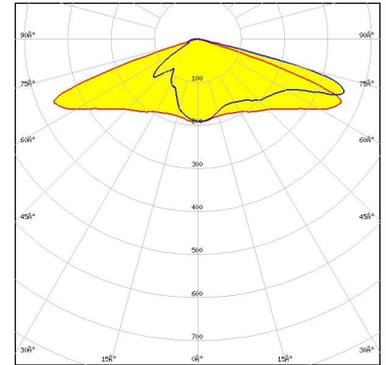

Light distribution files

#### LUMILEDS


LED LUXEON 3030 2D (Round LES)  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

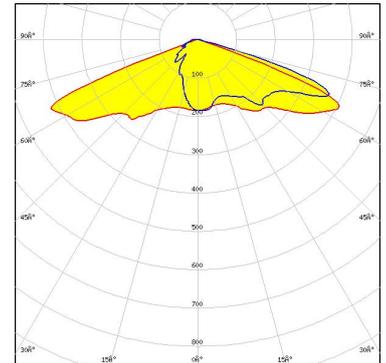

Light distribution files

#### LUMILEDS

LED LUXEON V2  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

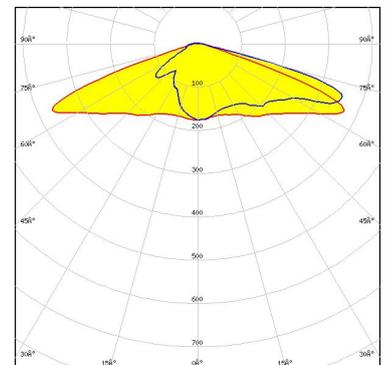


Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED NVSW219D  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

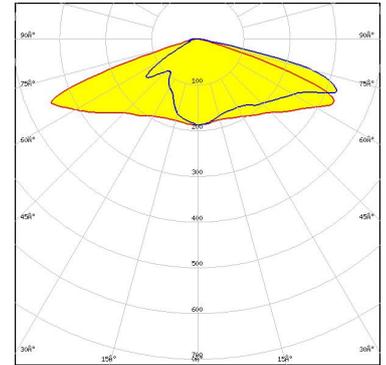

Light distribution files




LED NVSW319B  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

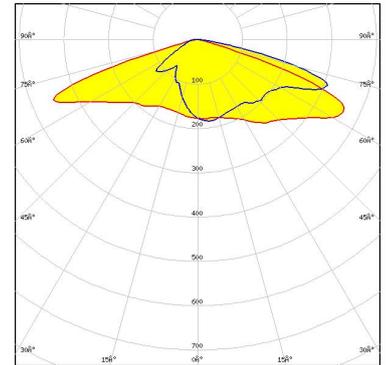

Light distribution files



LED OSCONIQ S 3030 (QSLR31)  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

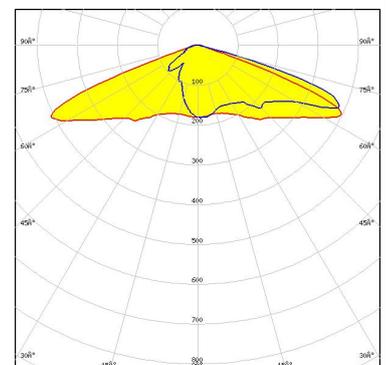


Light distribution files

#### OPTICAL RESULTS (MEASURED):

### PHILIPS


LED Fortimo FastFlex LED 4x8up PR G5  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

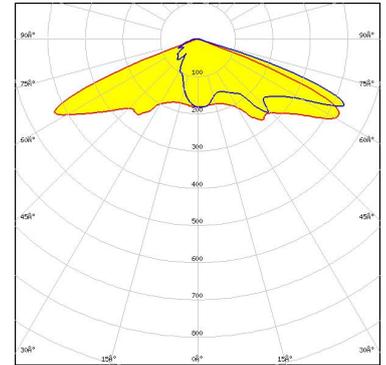

Light distribution files




LED SEOUL DC 3030C  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

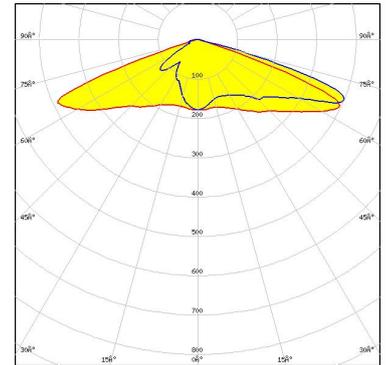

Light distribution files




LED Z5M3  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

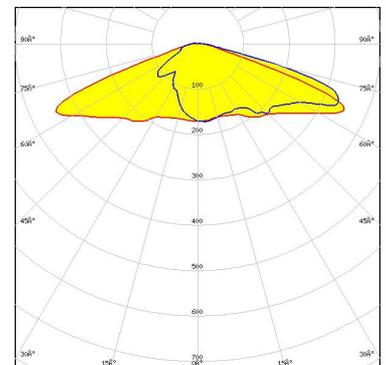

Light distribution files

#### OPTICAL RESULTS (MEASURED):

 SEUL SEMICONDUCTOR	
LED	Z5M4
FWHM / FWTM	Asymmetric
Efficiency	97 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

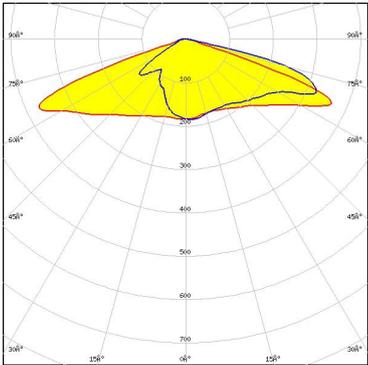


Light distribution files

#### OPTICAL RESULTS (SIMULATED):



LED J Series 5050B 6V K Class  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

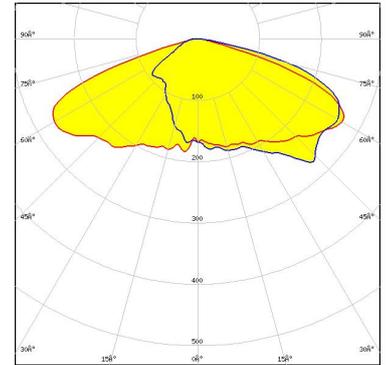

Light distribution files




LED XP-G2 HE  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Light distribution files



LED XP-G3  
 FWHM / FWTM Asymmetric  
 Efficiency 75 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

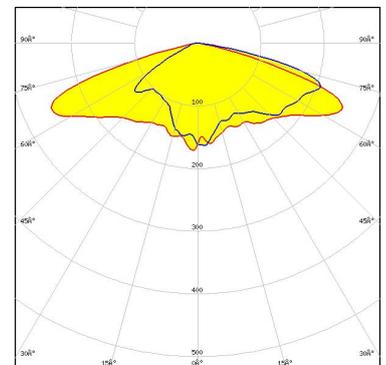


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED XP-G3  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

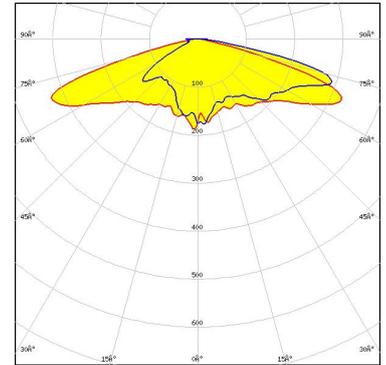

Light distribution files



LED XP-G4  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

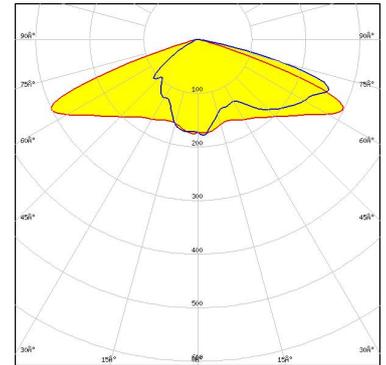


Protective plate, glass

Light distribution files



LED XP-G4  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

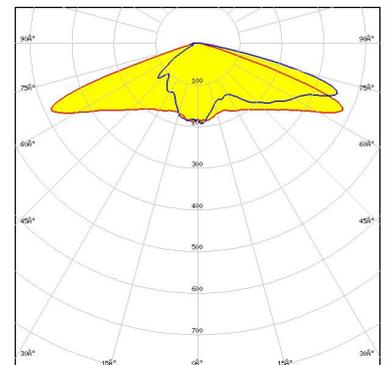

Light distribution files


#### OPTICAL RESULTS (SIMULATED):



LED LUXEON 5050 Square LES  
 FWHM / FWTM Asymmetric  
 Efficiency 82 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

Light distribution files

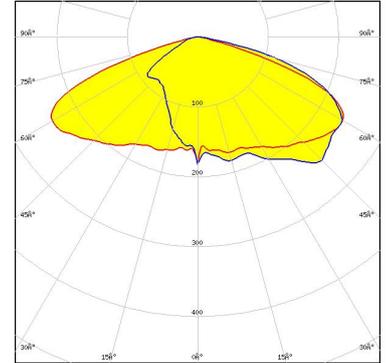

LED LUXEON 5050 Square LES  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Light distribution files

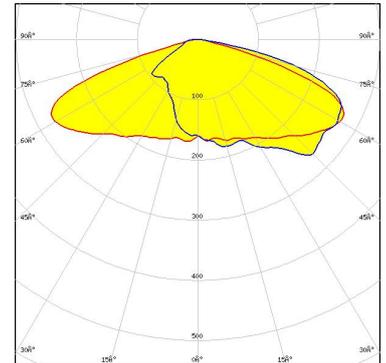

LED LUXEON C  
 FWHM / FWTM Asymmetric  
 Efficiency 74 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass


Light distribution files

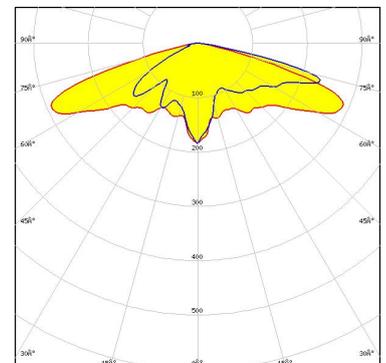

#### OPTICAL RESULTS (SIMULATED):




LED LUXEON CZ  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

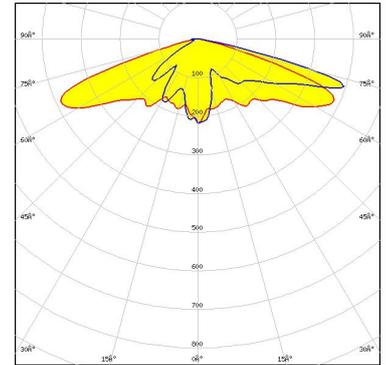

Light distribution files



LED LUXEON HL2X  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

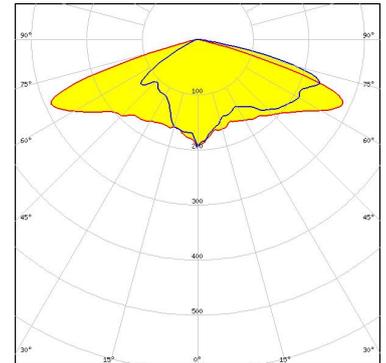


Protective plate, glass

Light distribution files



LED LUXEON TX  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

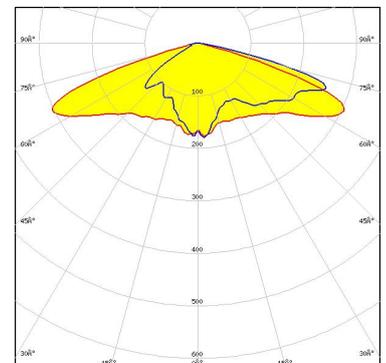


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED LUXEON TX  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

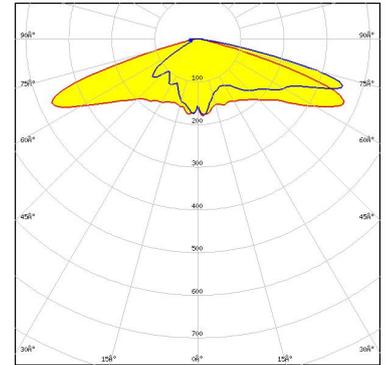

Light distribution files




LED NF2x757G  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

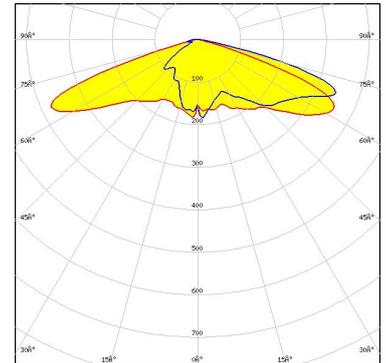

Light distribution files






LED NVSW219F  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

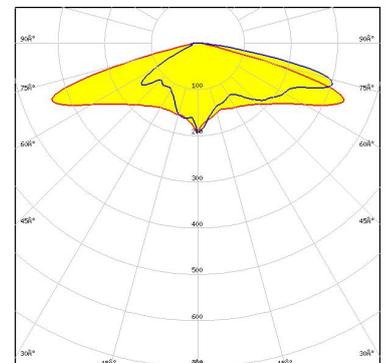

Light distribution files


#### OPTICAL RESULTS (SIMULATED):

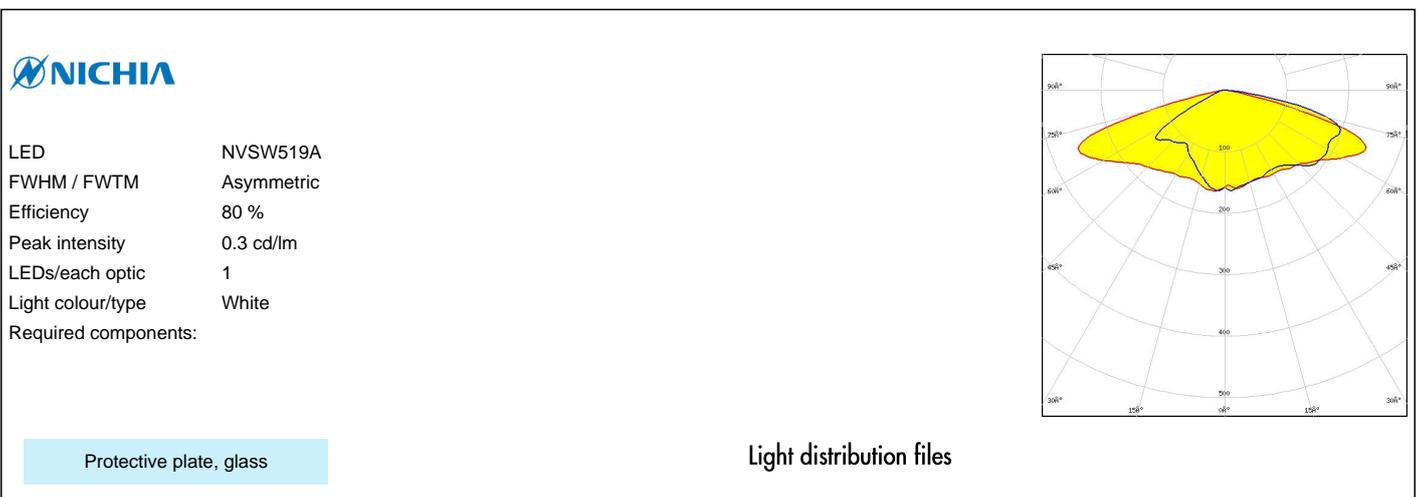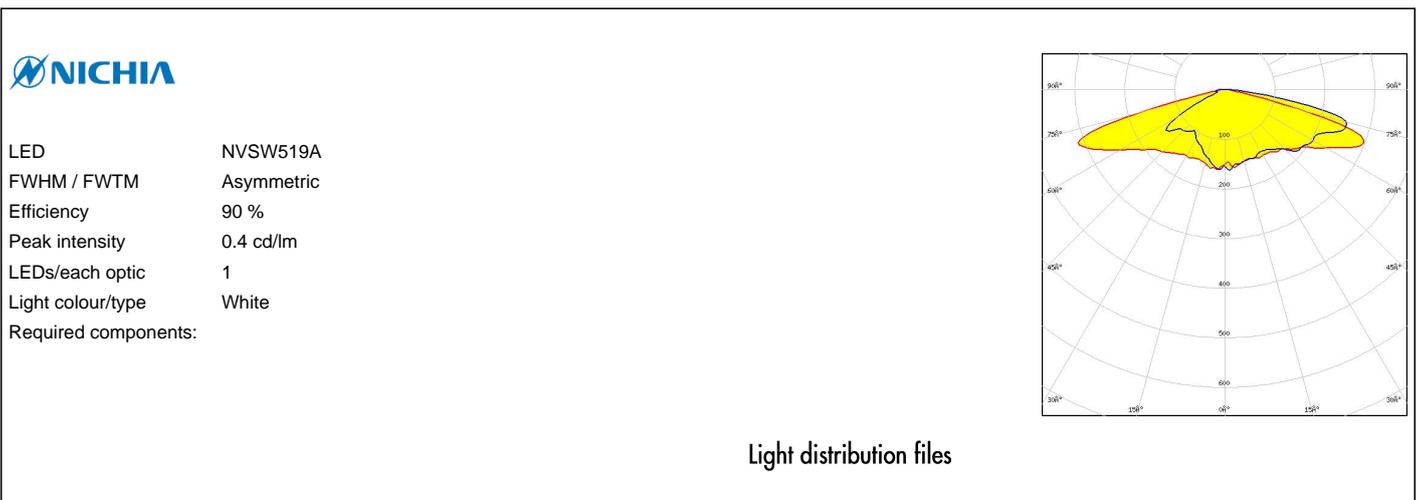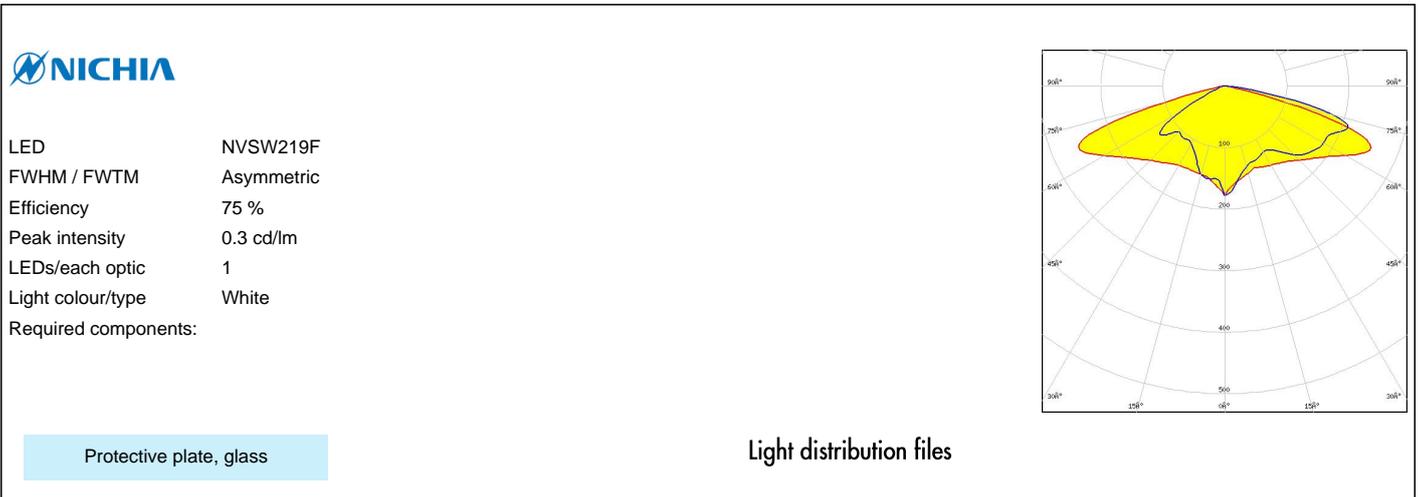

#### OPTICAL RESULTS (SIMULATED):




LED NVSxE21A  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

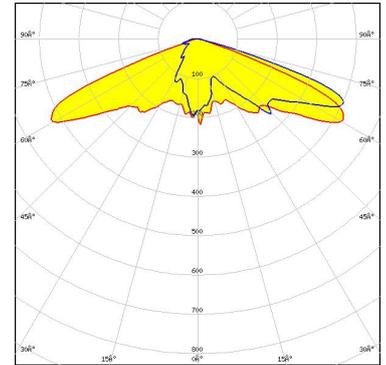

Light distribution files




LED OSCONIQ C 2424 Gen1  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

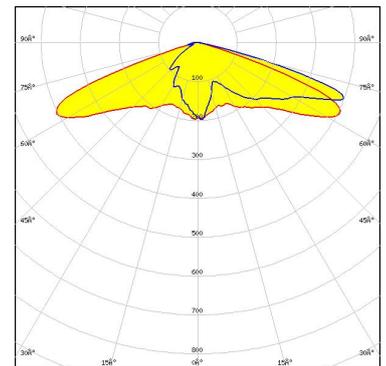

Light distribution files



LED OSCONIQ C 2424 Gen1  
 FWHM / FWTM Asymmetric  
 Efficiency 81 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

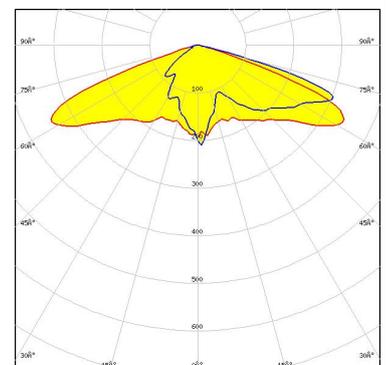

Protective plate, glass

Light distribution files


#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors

LED OSCONIQ C 3030  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass


Light distribution files

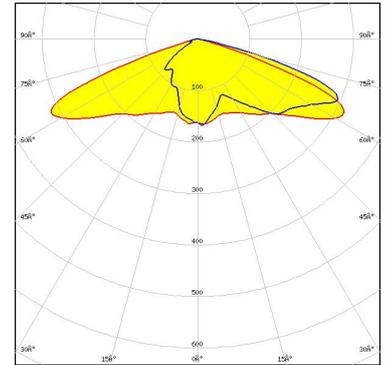

**OSRAM**  
Opto Semiconductors

LED OSCONIQ C 3030  
FWHM / FWTM Asymmetric  
Efficiency 95 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:


Light distribution files

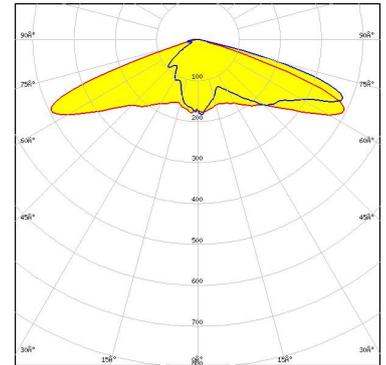

**OSRAM**  
Opto Semiconductors

LED OSCONIQ P 3030  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Light distribution files

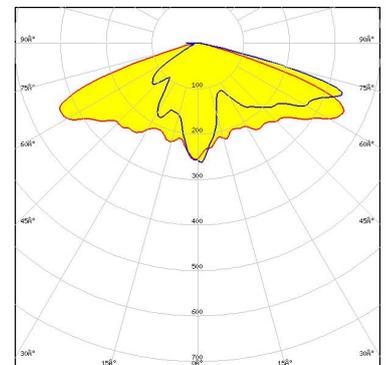


#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors

LED OSLON Pure 1414  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass


Light distribution files

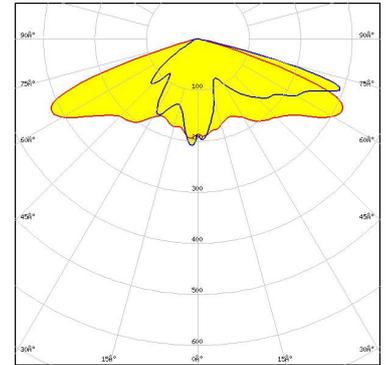

**OSRAM**  
Opto Semiconductors

LED OSLON Pure 1414  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Light distribution files

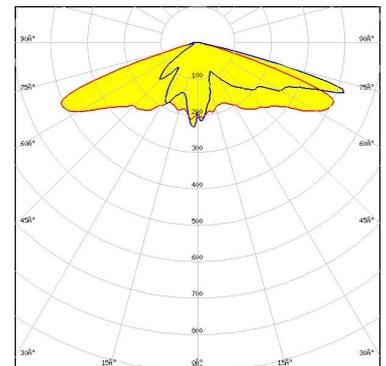


**OSRAM**  
Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
 FWHM / FWTM Asymmetric  
 Efficiency 77 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass


Light distribution files

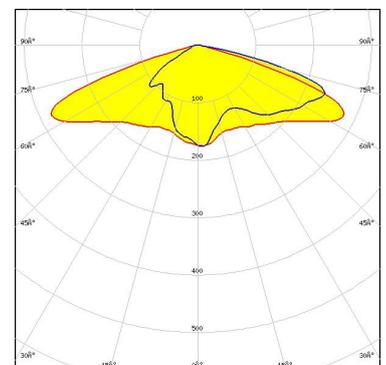

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

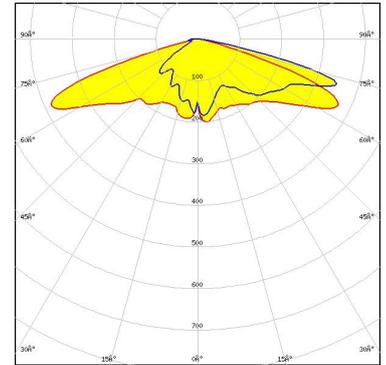

Light distribution files

**OSRAM**  
Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

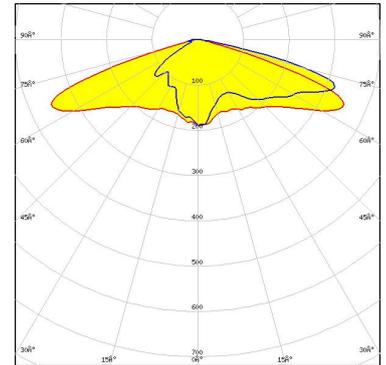

Light distribution files

**PHILIPS**

LED Fortimo FastFlex LED 4x8up PR G5  
 FWHM / FWTM Asymmetric  
 Efficiency 84 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

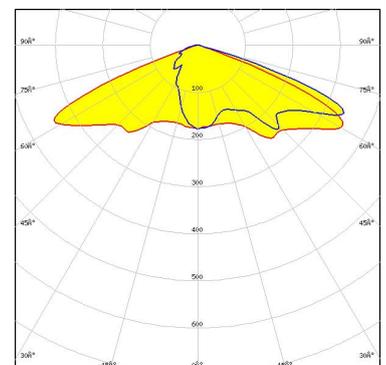


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):

### SAMSUNG


LED LH181A  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

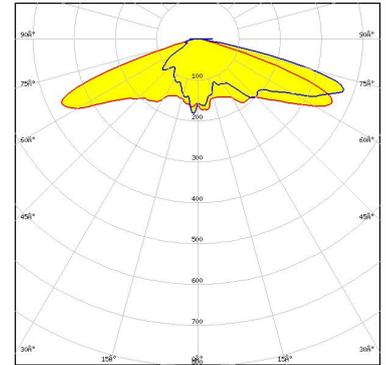

Light distribution files

### SAMSUNG


LED LH181B  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

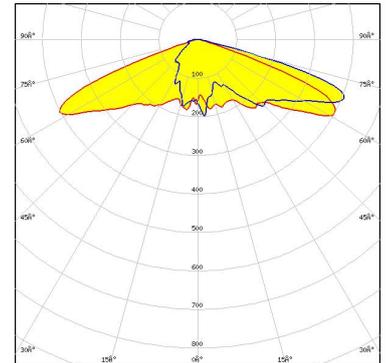

Light distribution files

### SAMSUNG

LED LH351B  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

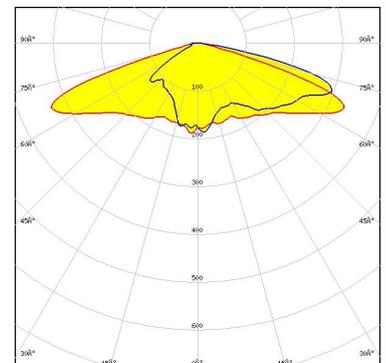

Light distribution files


#### OPTICAL RESULTS (SIMULATED):

### SAMSUNG

LED LH351B  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass

Light distribution files

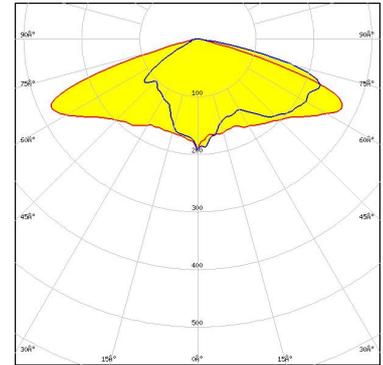


### SAMSUNG

LED LH351C  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass


Light distribution files

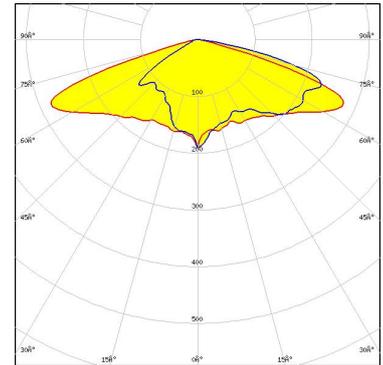

### SAMSUNG

LED LH351C  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Light distribution files

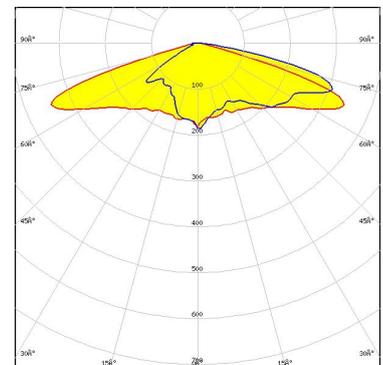


#### OPTICAL RESULTS (SIMULATED):

### SAMSUNG

LED LM302D  
 FWHM / FWTM Asymmetric  
 Efficiency 82 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

Light distribution files

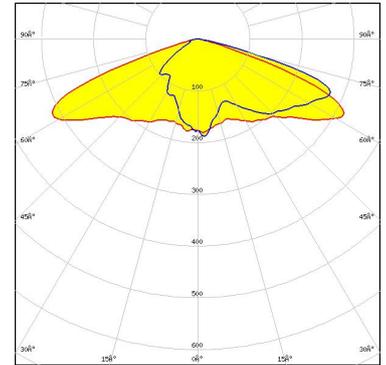


LED SEOUL 3030  
 FWHM / FWTM Asymmetric  
 Efficiency 98 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Light distribution files


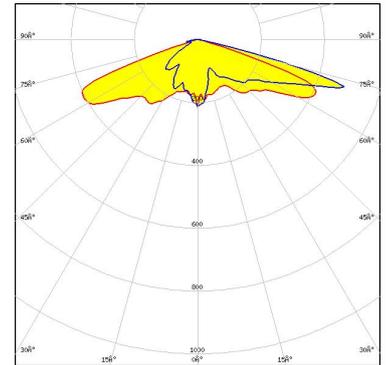


LED SEOUL 3030  
 FWHM / FWTM Asymmetric  
 Efficiency 98 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:



Light distribution files

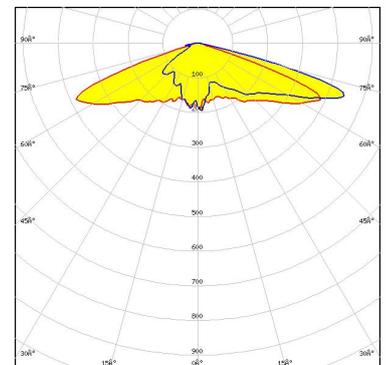

#### OPTICAL RESULTS (SIMULATED):

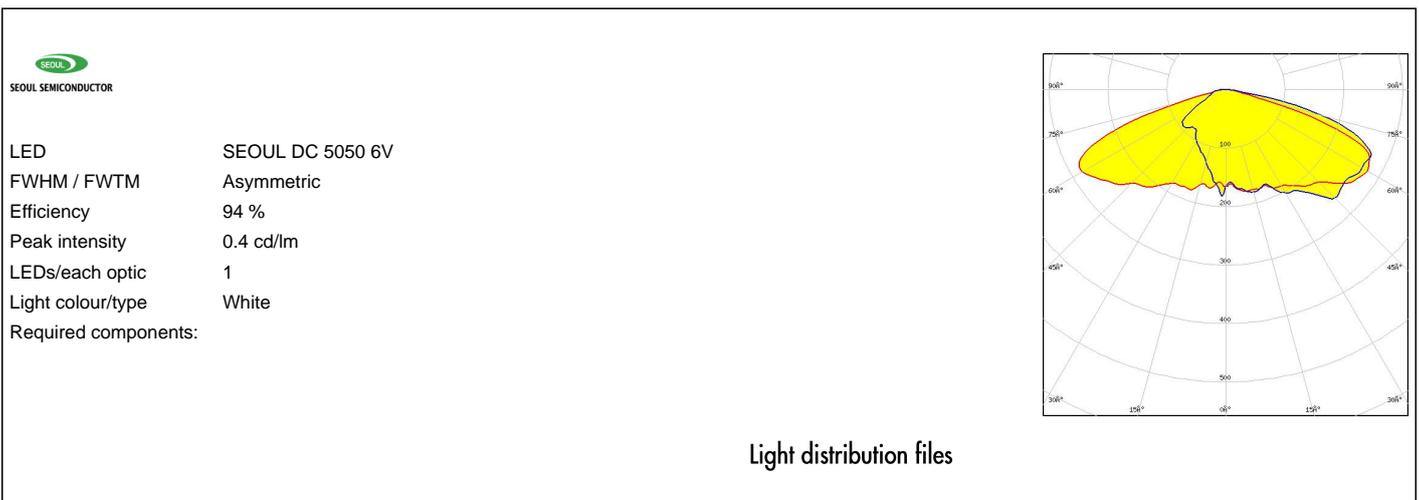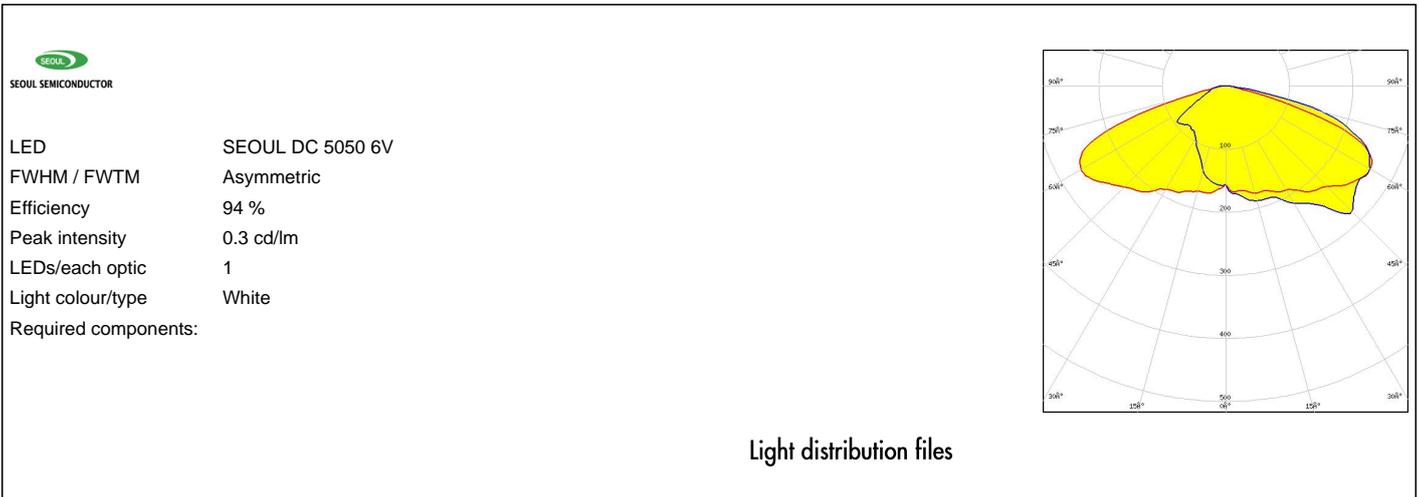

#### OPTICAL RESULTS (SIMULATED):

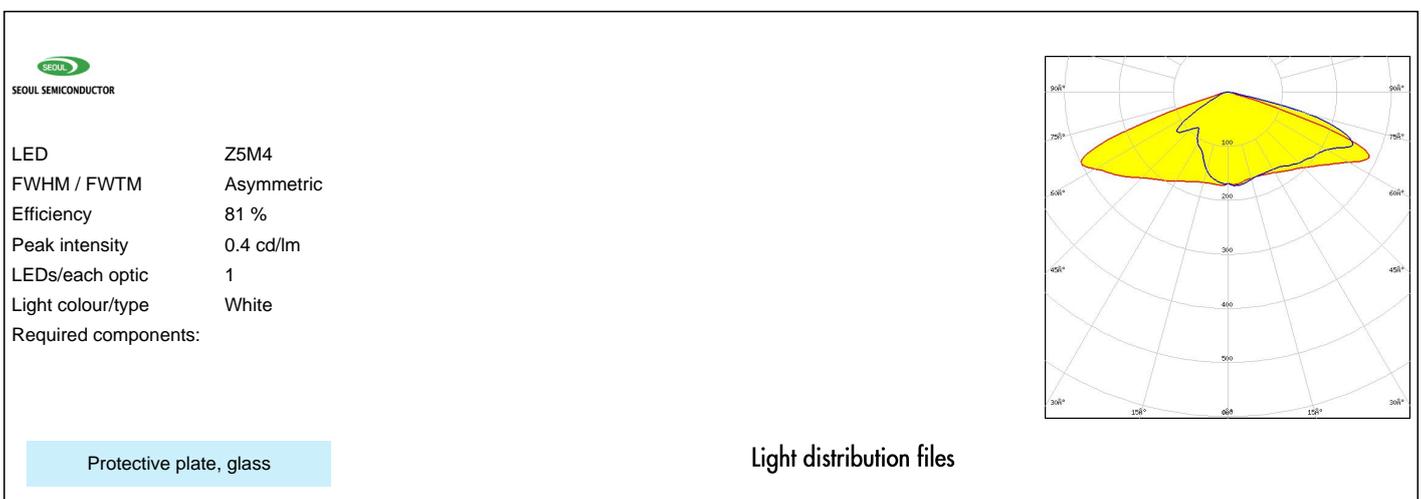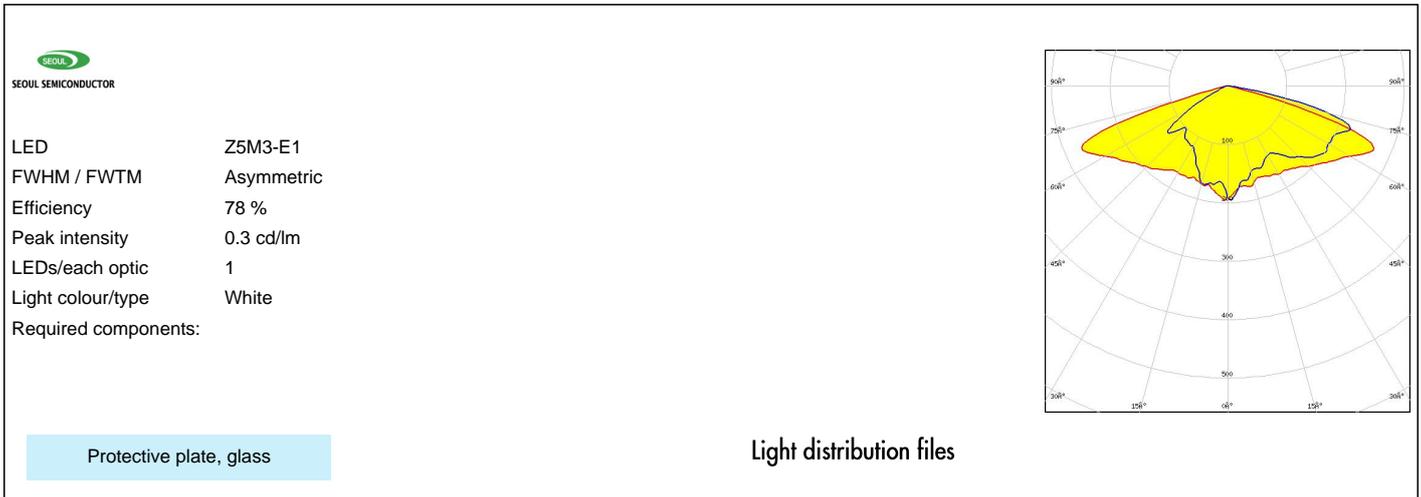

#### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

#### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 7  
FI-24100 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Poznan, Poland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)