

OLGA-RS

~6° spot beam beam. Optimized for high-power 3535 size LED packages. Assembly with holder and installation tape.

SPECIFICATION:

Dimensions	Ø 32.0
Height	19.1 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
OLGA-RS	Single lens	PMMA	clear		
OLGA-HLD	Holder	PC	black		
SPUTNIK-TAPE3	Tape	Acryl tape	black		

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CA16672_OLGA-RS » Box size: 476 x 273 x 292 mm	792	132	66	9.8

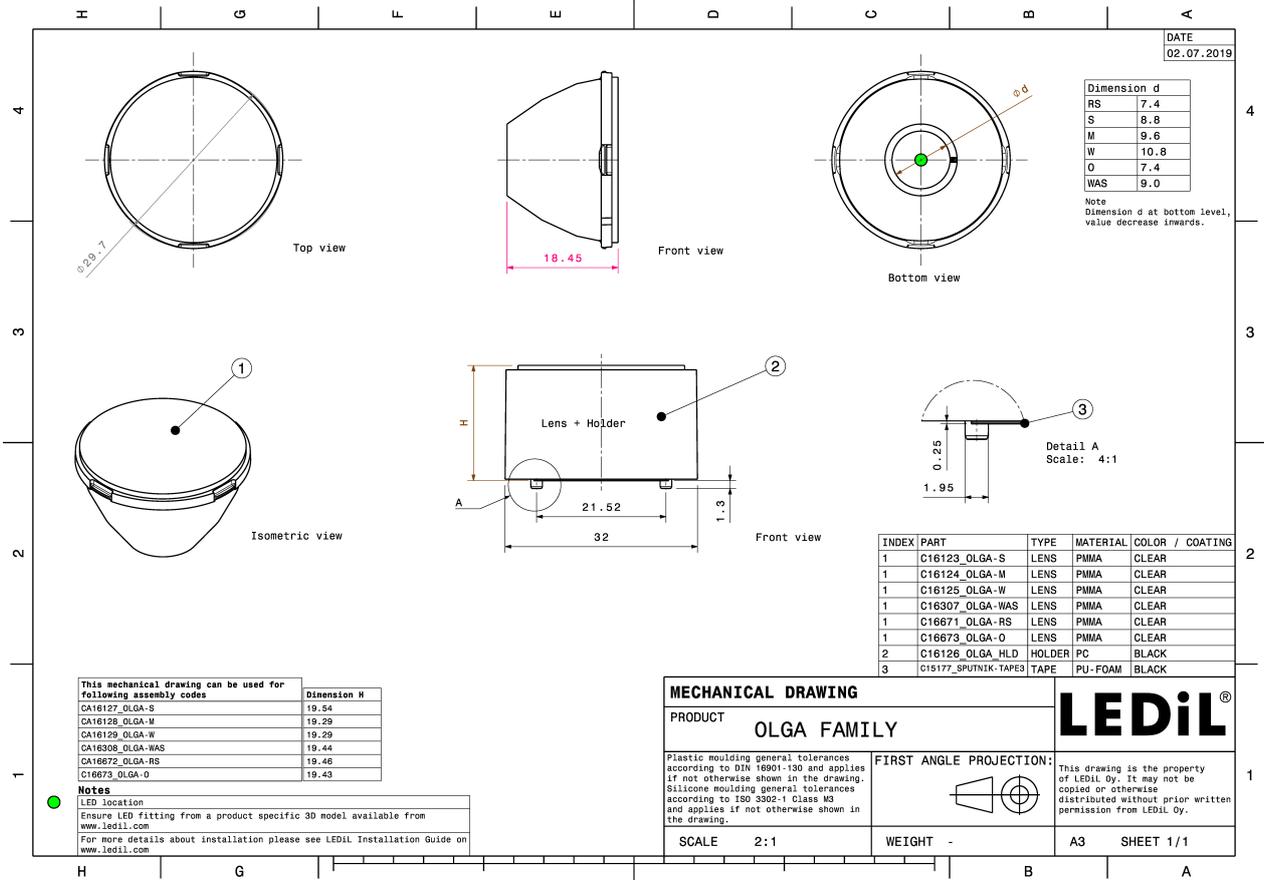


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):




LED XHP35 HD
FWHM / FWTM 13.0° / 29.0°
Efficiency 84 %
Peak intensity 9.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

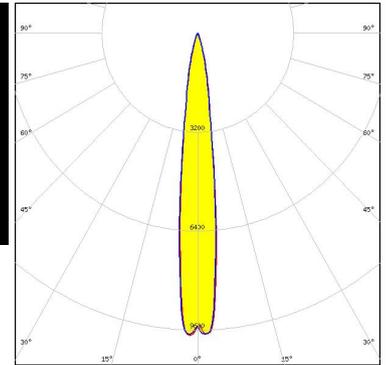

Light distribution files




LED XHP35 HI
FWHM / FWTM 9.0° / 22.0°
Efficiency 87 %
Peak intensity 18.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

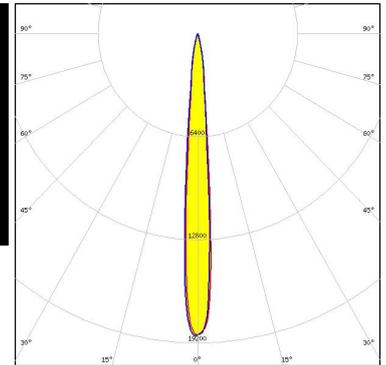

Light distribution files



LED XHP50.2
FWHM / FWTM 17.0° / 41.0°
Efficiency 78 %
Peak intensity 5.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

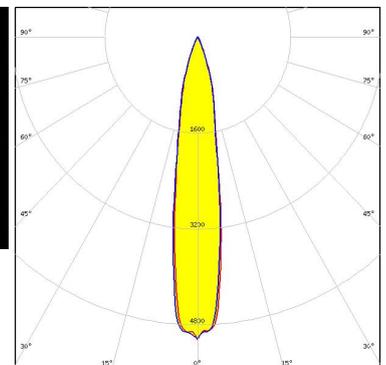


Light distribution files

OPTICAL RESULTS (MEASURED):




LED XM-L3
 FWHM / FWTM 11.0° / 25.0°
 Efficiency 86 %
 Peak intensity 13.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

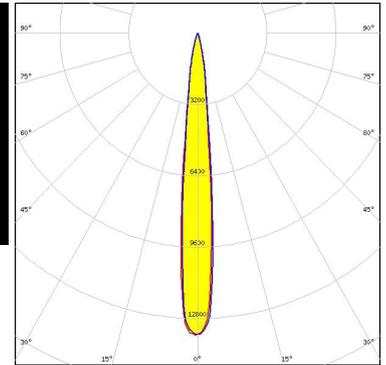

Light distribution files




LED XP-E
 FWHM / FWTM 5.0° / 12.0°
 Efficiency 87 %
 Peak intensity 45.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

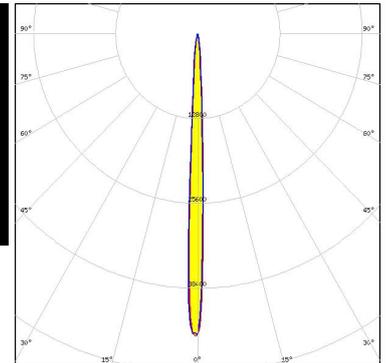

Light distribution files



LED XP-E2
 FWHM / FWTM 4.9° / 11.6°
 Efficiency 86 %
 Peak intensity 50.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

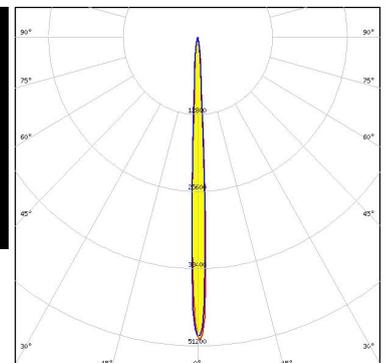


Light distribution files

OPTICAL RESULTS (MEASURED):




LED XP-G2
FWHM / FWTM 7.0° / 17.0°
Efficiency 86 %
Peak intensity 28 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

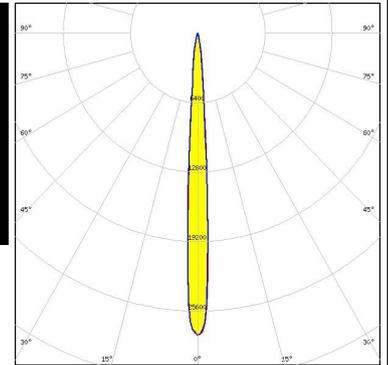

Light distribution files




LED XP-G3
FWHM / FWTM 8.0° / 20.0°
Efficiency 85 %
Peak intensity 21.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

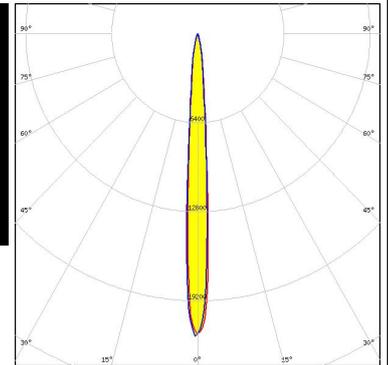

Light distribution files



LED XP-L2
FWHM / FWTM 12.0° / 29.0°
Efficiency 83 %
Peak intensity 10.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

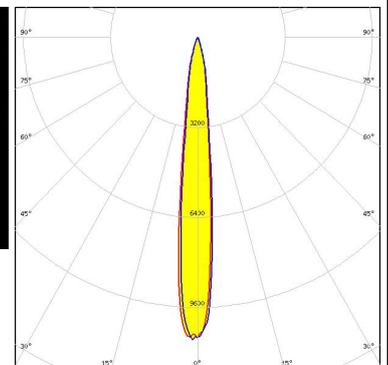


Light distribution files

OPTICAL RESULTS (MEASURED):




LED XQ-E HD
 FWHM / FWTM 5.0° / 13.0°
 Efficiency 79 %
 Peak intensity 42 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

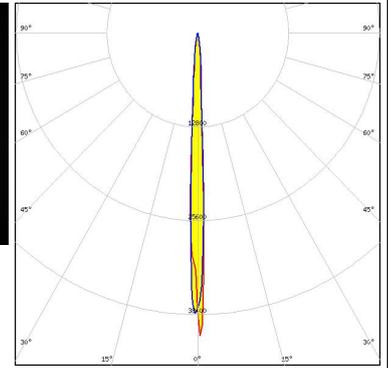

Light distribution files





LED XQ-E HI
 FWHM / FWTM 3.0° / 9.0°
 Efficiency 84 %
 Peak intensity 70 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

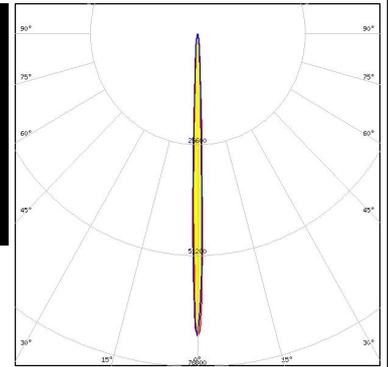

Light distribution files



LED XT-E
 FWHM / FWTM 8.0° / 19.0°
 Efficiency 83 %
 Peak intensity 21.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

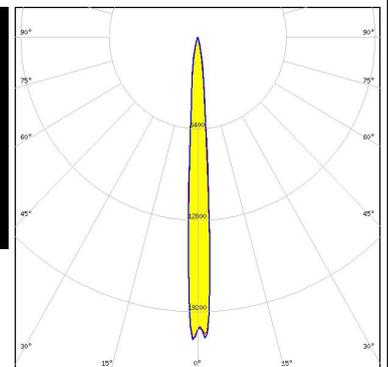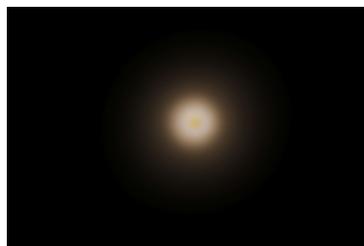


Light distribution files

OPTICAL RESULTS (MEASURED):




LED LUXEON 5050 Round LES
FWHM / FWTM 14.0° / 38.0°
Efficiency 86 %
Peak intensity 7.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

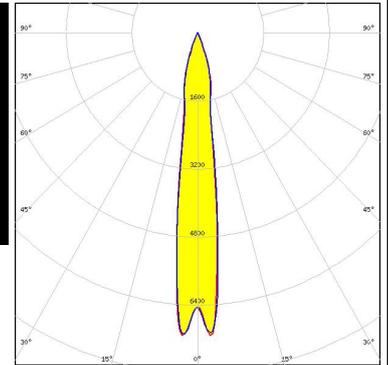

Light distribution files





LED LUXEON MZ
FWHM / FWTM 11.0° / 30.0°
Efficiency 85 %
Peak intensity 11.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

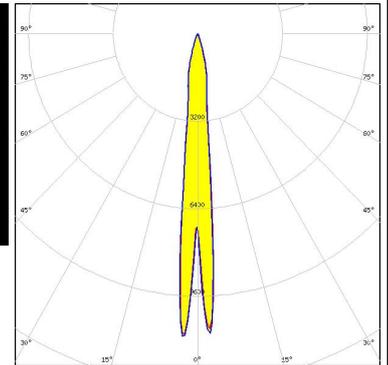

Light distribution files



LED LUXEON TX
FWHM / FWTM 7.0° / 18.0°
Efficiency 86 %
Peak intensity 24.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

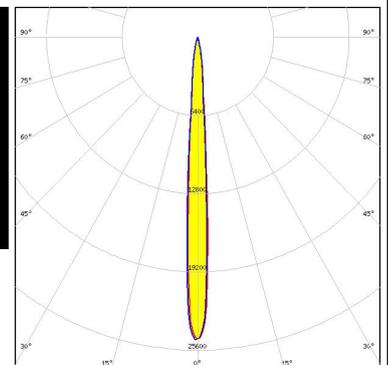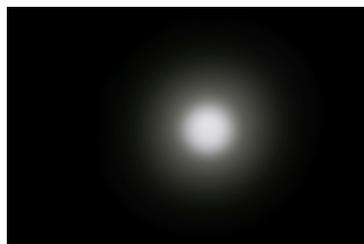


Light distribution files

OPTICAL RESULTS (MEASURED):




LED LUXEON V
FWHM / FWTM 11.0° / 28.0°
Efficiency 84 %
Peak intensity 11.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

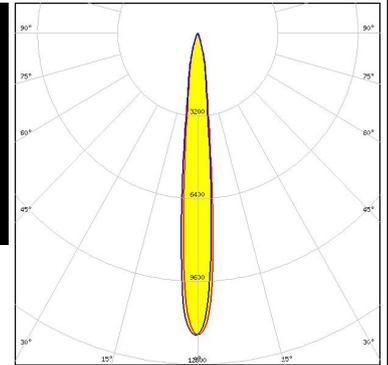

Light distribution files




LED LUXEON Z ES
FWHM / FWTM 5.0° / 12.0°
Efficiency 87 %
Peak intensity 44.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

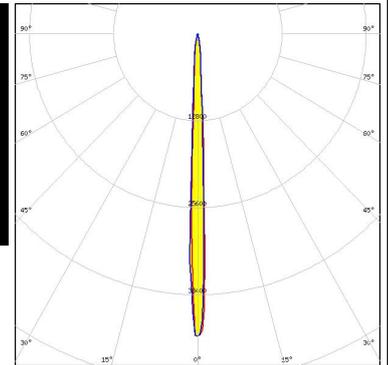

Light distribution files



LED NCSx17A
FWHM / FWTM 4.0° / 13.0°
Efficiency 83 %
Peak intensity 37.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

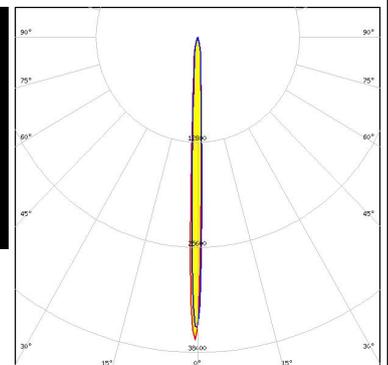


Light distribution files

OPTICAL RESULTS (MEASURED):




LED NV4x144A
 FWHM / FWTM 18.0° / 39.0°
 Efficiency 83 %
 Peak intensity 5.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

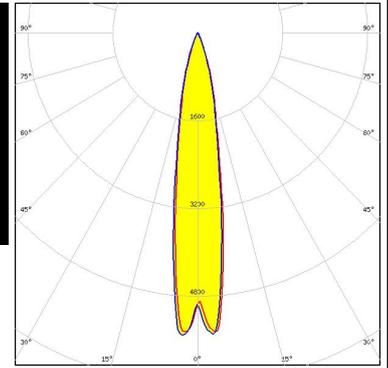

Light distribution files




LED NVSW219D
 FWHM / FWTM 9.0° / 19.0°
 Efficiency 87 %
 Peak intensity 21 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

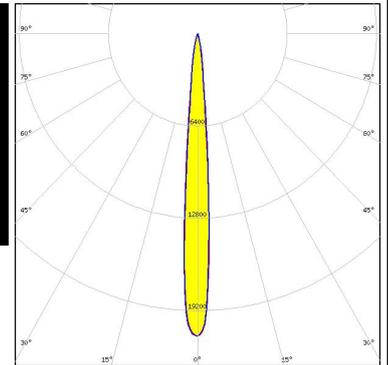

Light distribution files



LED NVSW319B
 FWHM / FWTM 10.0° / 23.0°
 Efficiency 87 %
 Peak intensity 16.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

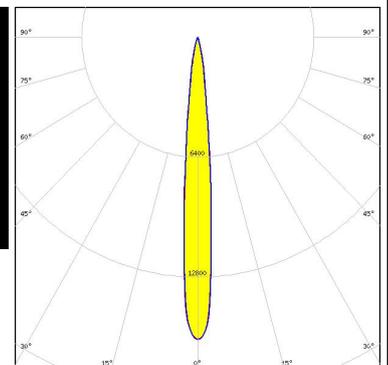


Light distribution files

OPTICAL RESULTS (MEASURED):




LED NVSW719AC
 FWHM / FWTM 8.0° / 19.0°
 Efficiency 91 %
 Peak intensity 24.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

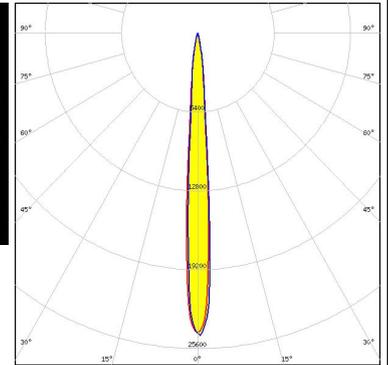

Light distribution files




LED NVSxE21A
 FWHM / FWTM 5.0° / 16.0°
 Efficiency 84 %
 Peak intensity 27.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

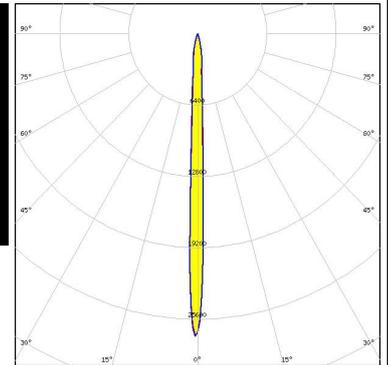

Light distribution files



LED NVSxx19B/NVSxx19C
 FWHM / FWTM 8.0° / 20.0°
 Efficiency 85 %
 Peak intensity 20.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

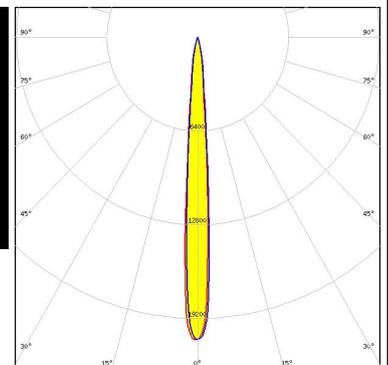


Light distribution files

OPTICAL RESULTS (MEASURED):

OSRAM
Opto Semiconductors


LED OSCONIQ P 3737 (2W version)
 FWHM / FWTM 6.0° / 17.0°
 Efficiency 86 %
 Peak intensity 26.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

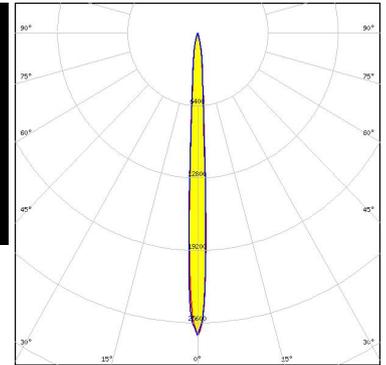

Light distribution files

OSRAM
Opto Semiconductors


LED OSCONIQ P 3737 (3W version)
 FWHM / FWTM 10.0° / 25.0°
 Efficiency 85 %
 Peak intensity 14.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

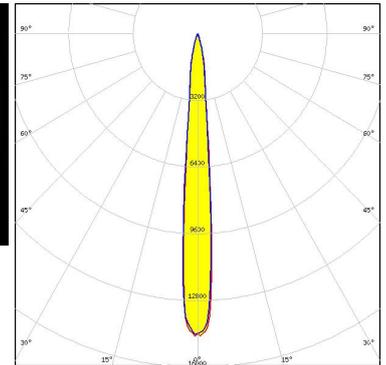

Light distribution files

OSRAM
Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3
 FWHM / FWTM 7.0° / 17.0°
 Efficiency 86 %
 Peak intensity 26.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

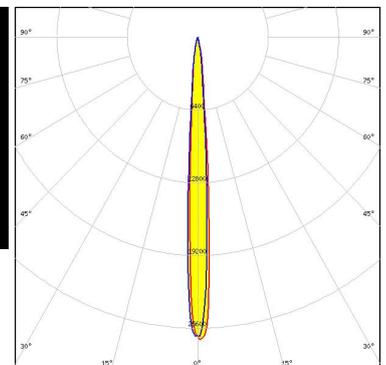


Light distribution files

OPTICAL RESULTS (MEASURED):

OSRAM
Opto Semiconductors


LED OSLON SSL 150
 FWHM / FWTM 4.0° / 11.0°
 Efficiency 87 %
 Peak intensity 57 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

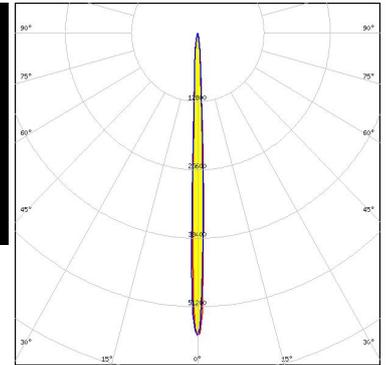

Light distribution files

SAMSUNG


LED LH231B
 FWHM / FWTM 7.0° / 24.0°
 Efficiency 86 %
 Peak intensity 18 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

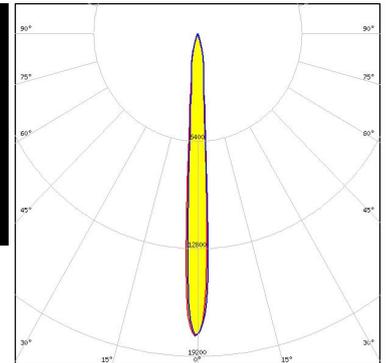

Light distribution files

SAMSUNG

LED LH351B
 FWHM / FWTM 8.0° / 19.0°
 Efficiency 86 %
 Peak intensity 21.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

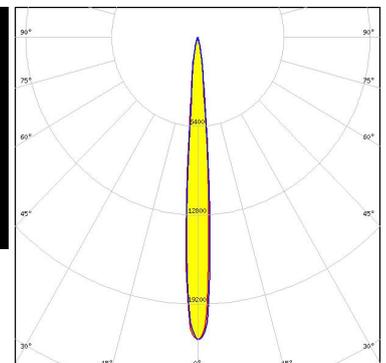


Light distribution files

OPTICAL RESULTS (MEASURED):

SAMSUNG


LED LH351C
 FWHM / FWTM 9.0° / 21.0°
 Efficiency 87 %
 Peak intensity 19.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

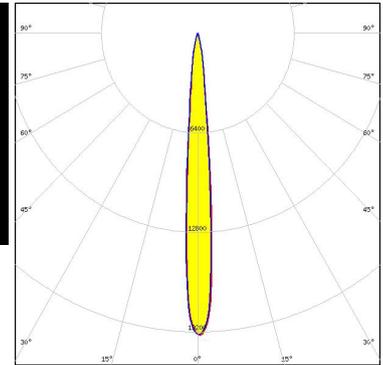

Light distribution files

SAMSUNG


LED LH351D
 FWHM / FWTM 12.0° / 26.0°
 Efficiency 86 %
 Peak intensity 12.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

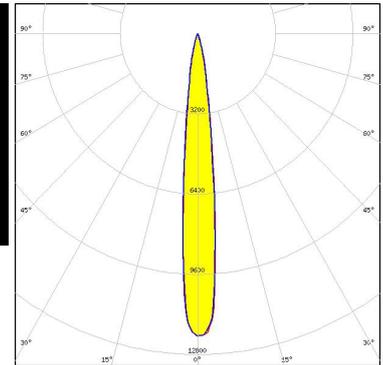

Light distribution files



SAMSUNG

LED LH508A
 FWHM / FWTM 14.0° / 38.0°
 Efficiency 86 %
 Peak intensity 7.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

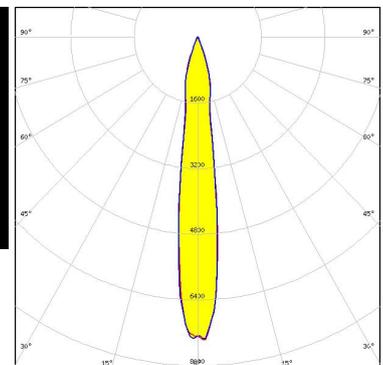


Light distribution files

OPTICAL RESULTS (MEASURED):

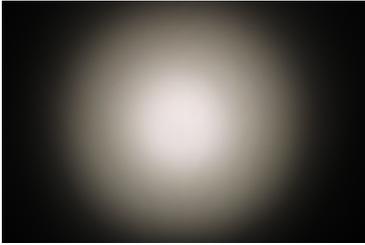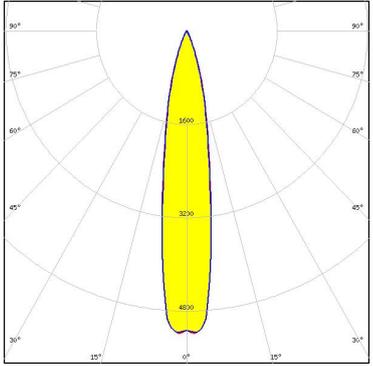 <p>SEOL SEMICONDUCTOR</p>			
LED	WICOP 5050		
FWHM / FWTM	18.0° / 40.0°		
Efficiency	87 %		
Peak intensity	5.3 cd/lm		
LEDs/each optic	1		
Light colour/type	White		
Required components:			

Light distribution files

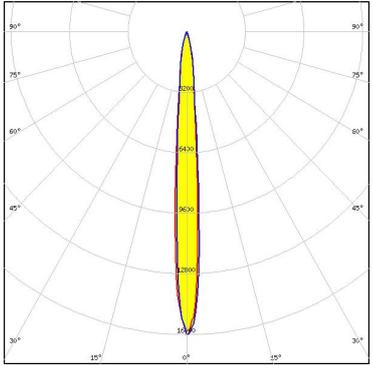
 <p>SEOL SEMICONDUCTOR</p>			
LED	Z5M3		
FWHM / FWTM	9.0° / 23.0°		
Efficiency	83 %		
Peak intensity	16 cd/lm		
LEDs/each optic	1		
Light colour/type	White		
Required components:			

Light distribution files

OPTICAL RESULTS (SIMULATED):




LED SMD 3838 RGBW 3V
 FWHM / FWTM 14.0° / 26.0°
 Efficiency 94 %
 Peak intensity 12.5 cd/lm
 LEDs/each optic 1
 Light colour/type RGBW
 Required components:

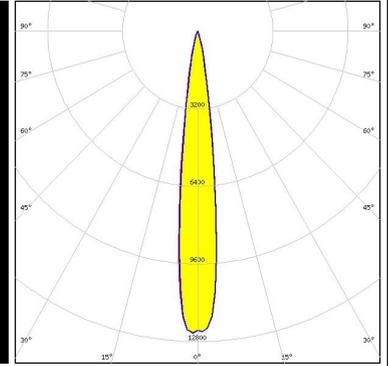

Light distribution files




LED J Series 5050 Round LES
 FWHM / FWTM 14.0° / 33.0°
 Efficiency 93 %
 Peak intensity 10.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

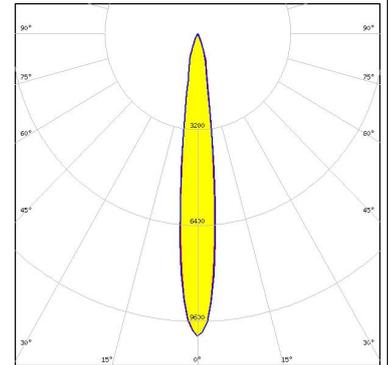

Light distribution files



LED XHP35 HI
 FWHM / FWTM 9.0° / 18.0°
 Efficiency 92 %
 Peak intensity 25 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

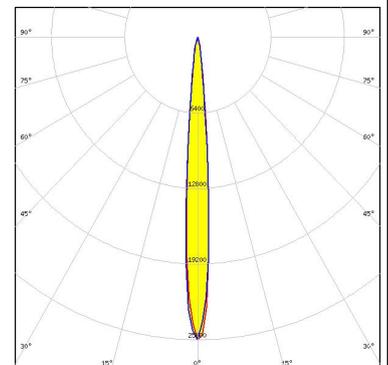


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XHP35.2 HD
 FWHM / FWTM 16.0° / 30.0°
 Efficiency 89 %
 Peak intensity 9.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

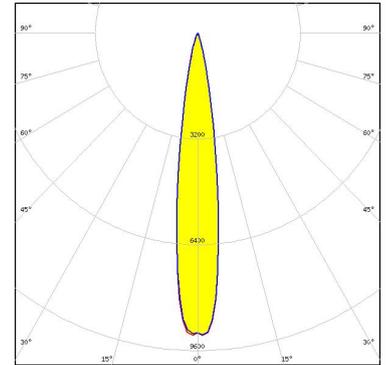

Light distribution files




LED XHP35.2 HI
 FWHM / FWTM 12.0° / 24.0°
 Efficiency 93 %
 Peak intensity 14.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

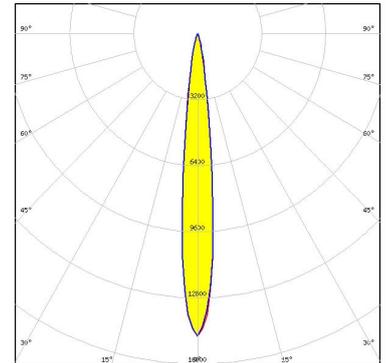

Light distribution files



LED XHP50.2
 FWHM / FWTM 18.0° / 36.0°
 Efficiency 88 %
 Peak intensity 6.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

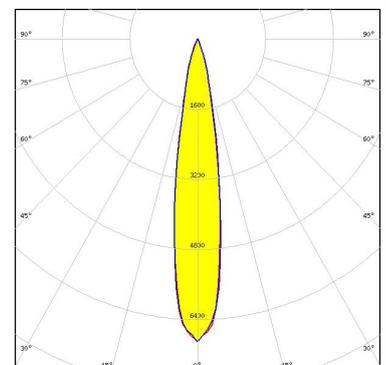


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XHP50.3 HD
 FWHM / FWTM 16.0 + 18.0° / 32.0°
 Efficiency 89 %
 Peak intensity 7.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

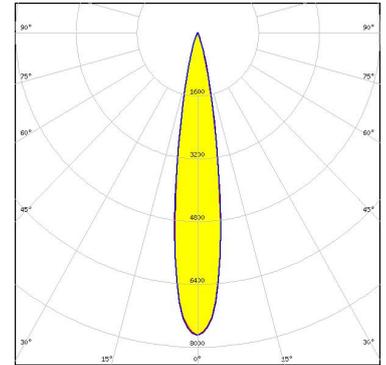

Light distribution files




LED XHP70.2
 FWHM / FWTM 22.0° / 46.0°
 Efficiency 84 %
 Peak intensity 3.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

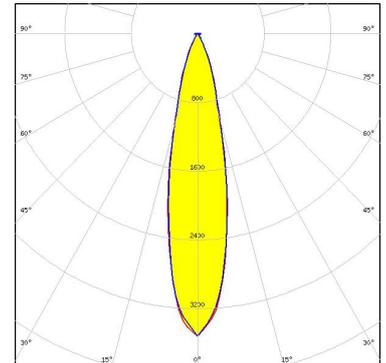

Light distribution files



LED XM-L
 FWHM / FWTM 12.0° / 23.0°
 Efficiency 94 %
 Peak intensity 16 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

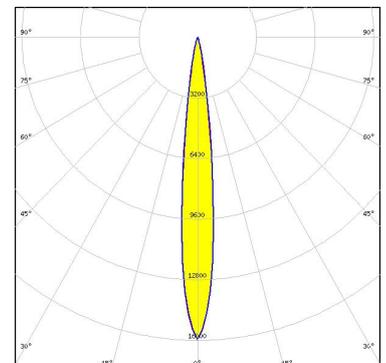


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XP-G2 HE
 FWHM / FWTM 10.0° / 20.0°
 Efficiency 93 %
 Peak intensity 20.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

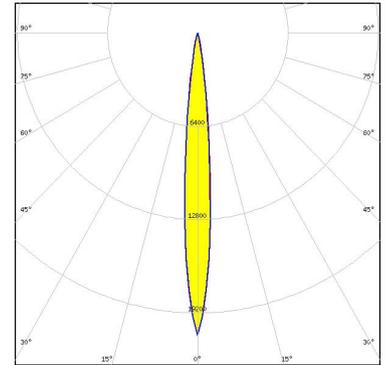

Light distribution files




LED XP-G4
 FWHM / FWTM 8.0° / 16.0°
 Efficiency 94 %
 Peak intensity 31.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

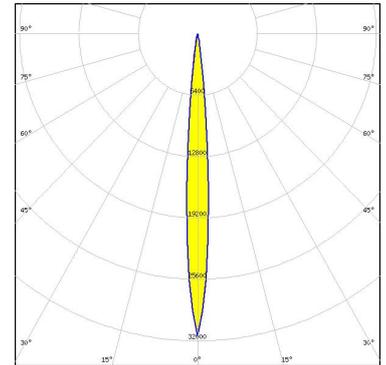

Light distribution files



LED XP-G4 HI
 FWHM / FWTM 6.0° / 14.0°
 Efficiency 92 %
 Peak intensity 37.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


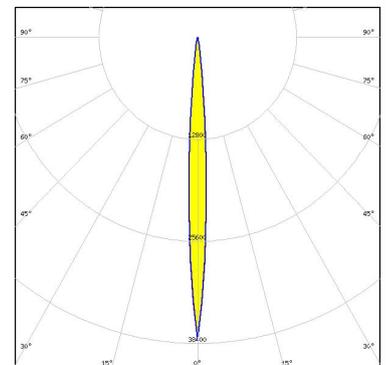


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XP-GR
 FWHM / FWTM 6.0° / 12.0°
 Efficiency 94 %
 Peak intensity 66.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

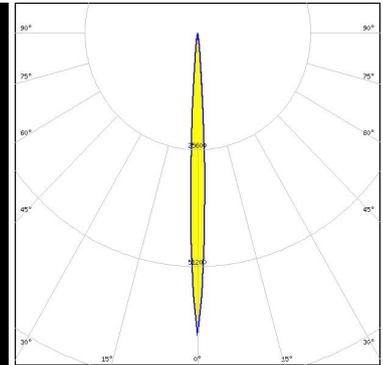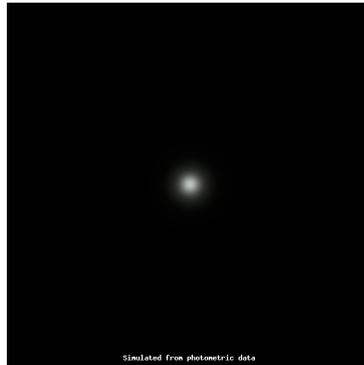

Light distribution files





LED XP-L HI
 FWHM / FWTM 8.0° / 15.0°
 Efficiency 92 %
 Peak intensity 33 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

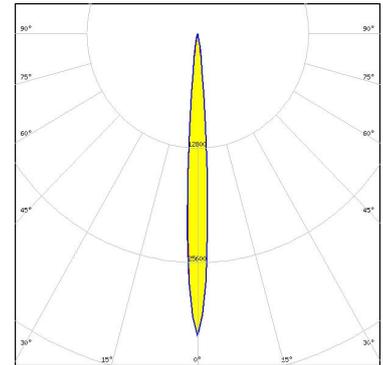

Light distribution files



LED XP-LR
 FWHM / FWTM 6.0° / 12.0°
 Efficiency 94 %
 Peak intensity 52.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

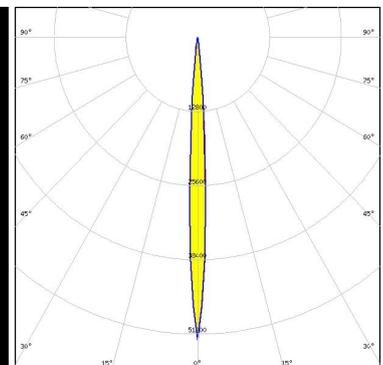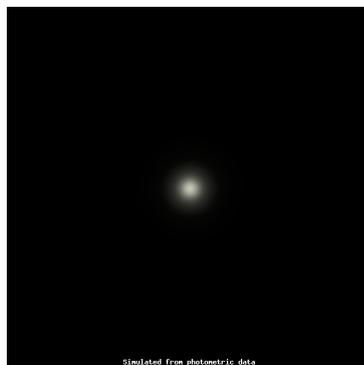


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XP-P
FWHM / FWTM 6.0° / 12.0°
Efficiency 96 %
Peak intensity 63.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

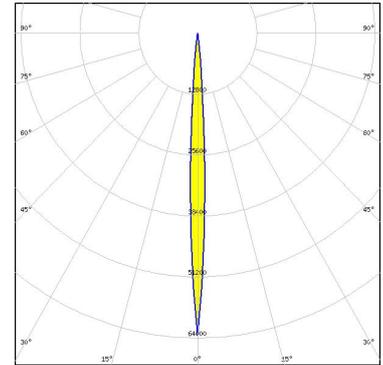

Light distribution files




LED LUXEON 7070
FWHM / FWTM 19.0° / 49.0°
Efficiency 95 %
Peak intensity 4.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

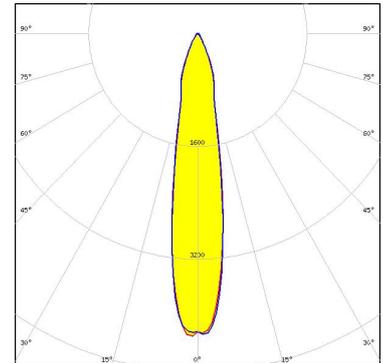

Light distribution files



LED LUXEON C
FWHM / FWTM 6.0° / 14.0°
Efficiency 89 %
Peak intensity 41 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

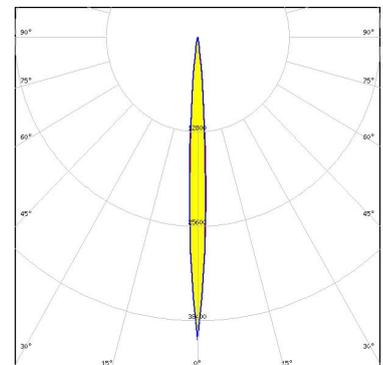


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED LUXEON CZ
FWHM / FWTM 6.0° / 12.0°
Efficiency 93 %
Peak intensity 63.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

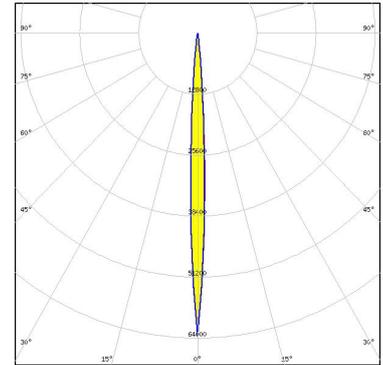

Light distribution files




LED LUXEON HL4Z
FWHM / FWTM 8.0° / 18.0°
Efficiency 94 %
Peak intensity 26.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

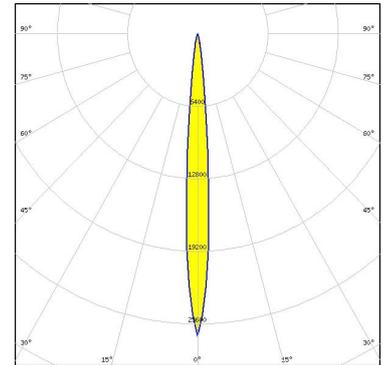

Light distribution files



LED SFT-12R-W-A
FWHM / FWTM 4.0° / 10.0°
Efficiency 93 %
Peak intensity 91.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

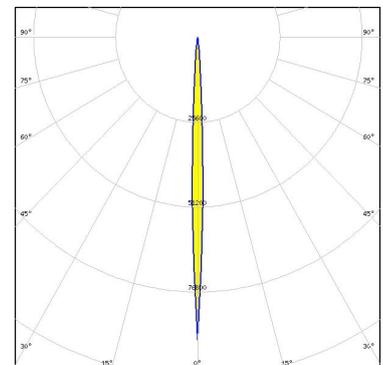


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED SST-12 Gen2
 FWHM / FWTM 6.0° / 14.0°
 Efficiency 86 %
 Peak intensity 45.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

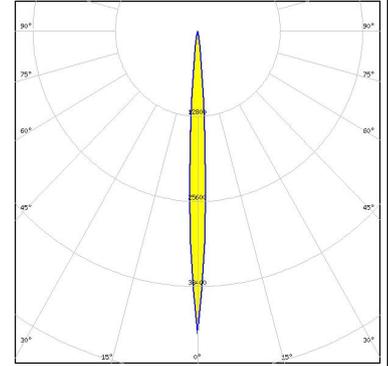

Light distribution files




LED SST-20 Gen2
 FWHM / FWTM 8.0° / 16.0°
 Efficiency 93 %
 Peak intensity 34.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

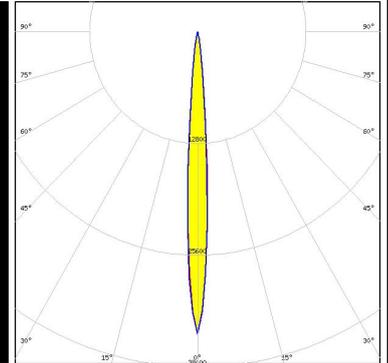

Light distribution files



LED SST-20 Gen2
 FWHM / FWTM 8.0° / 14.0°
 Efficiency 93 %
 Peak intensity 38.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

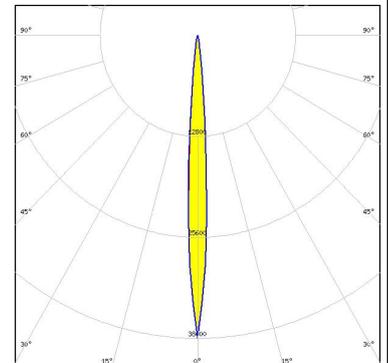


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED SST-40
 FWHM / FWTM 12.0° / 24.0°
 Efficiency 93 %
 Peak intensity 14.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

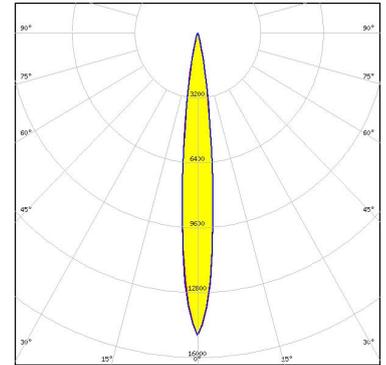

Light distribution files




LED SST-70X-WCS
 FWHM / FWTM 14.0° / 28.0°
 Efficiency 94 %
 Peak intensity 10.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

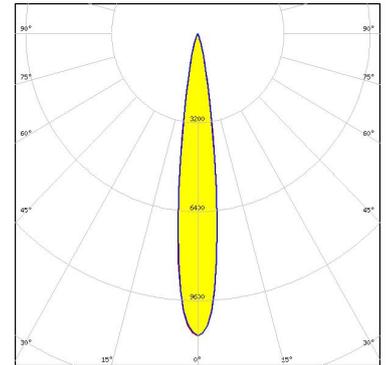

Light distribution files



LED NF2x757G
 FWHM / FWTM 8.0° / 19.0°
 Efficiency 94 %
 Peak intensity 25 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

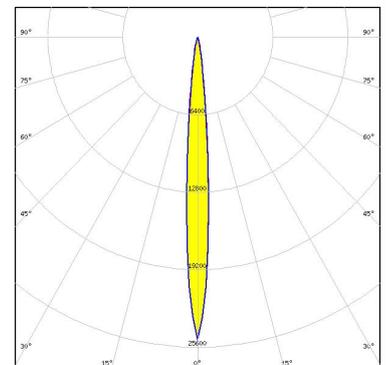


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED NV4WB35AM
 FWHM / FWTM 12.0° / 26.0°
 Efficiency 94 %
 Peak intensity 13.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

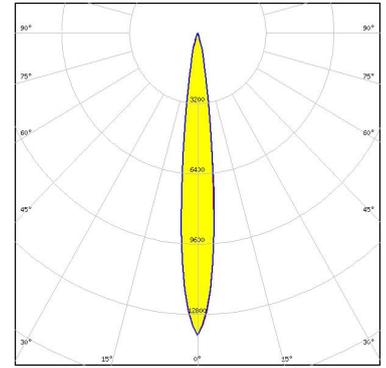

Light distribution files




LED NV4WB35AM
 FWHM / FWTM 12.0° / 26.0°
 Efficiency 93 %
 Peak intensity 13.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

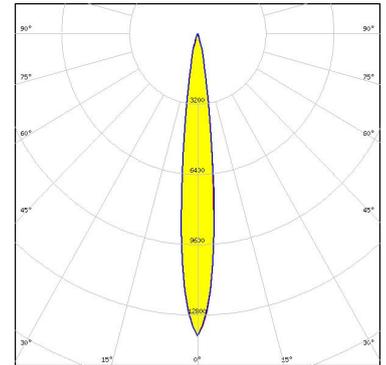

Light distribution files



LED NVSW219C-V2
 FWHM / FWTM 6.0° / 14.0°
 Efficiency 93 %
 Peak intensity 42.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

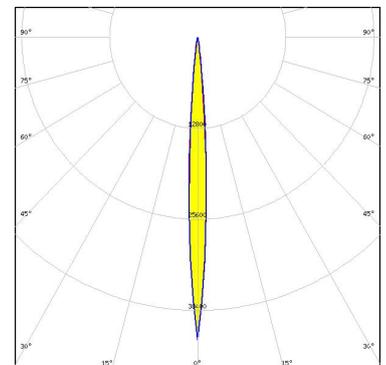


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSLON PURE 1010
FWHM / FWTM 14.0° / 36.0°
Efficiency 88 %
Peak intensity 8.1 cd/lm
LEDs/each optic 9
Light colour/type White
Required components:

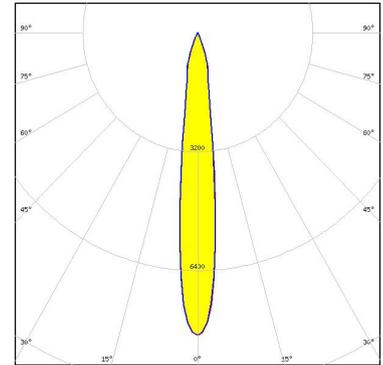

Light distribution files

OSRAM
Opto Semiconductors


LED OSLON Pure 1414
FWHM / FWTM 6.0° / 12.0°
Efficiency 93 %
Peak intensity 59.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

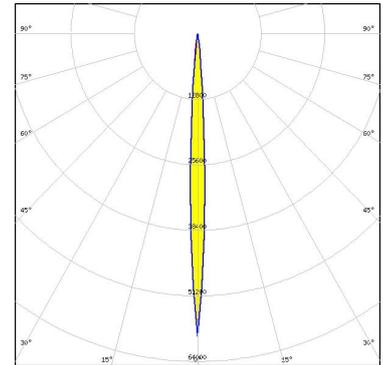

Light distribution files

OSRAM
Opto Semiconductors

LED OSLON Pure 1414
FWHM / FWTM 14.0° / 26.0°
Efficiency 94 %
Peak intensity 11 cd/lm
LEDs/each optic 4
Light colour/type RGBW
Required components:

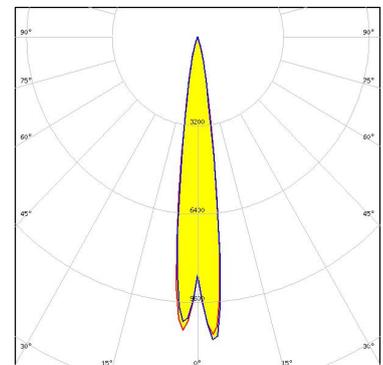


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED SFH 4170S
FWHM / FWTM 6.0° / 12.0°
Efficiency 82 %
LEDs/each optic 1
Light colour/type IR
Required components:

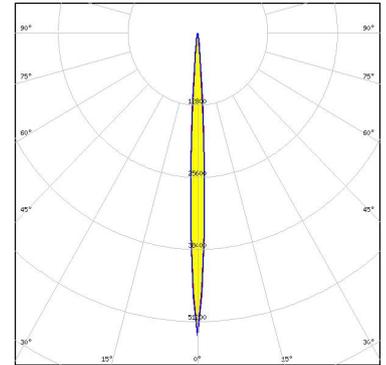

Light distribution files

OSRAM
Opto Semiconductors


LED SFH 4715AS
FWHM / FWTM 7.0° / 16.0°
Efficiency 92 %
LEDs/each optic 1
Light colour/type IR
Required components:

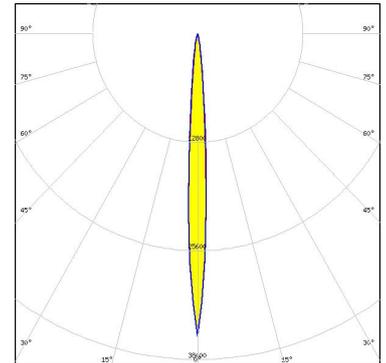

Light distribution files

OSRAM
Opto Semiconductors


LED SFH 4716AS
FWHM / FWTM 6.0° / 14.0°
Efficiency 93 %
LEDs/each optic 1
Light colour/type IR
Required components:

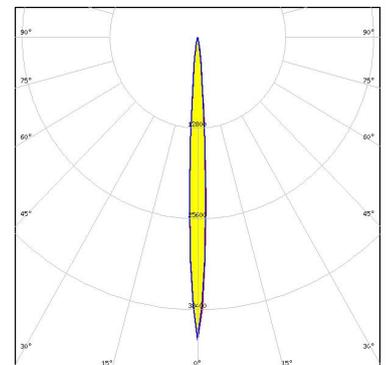


Light distribution files

OPTICAL RESULTS (SIMULATED):

 SEUL SEMICONDUCTOR	
LED	Z5M3-E1
FWHM / FWTM	10.0° / 18.0°
Efficiency	94 %
Peak intensity	26.7 cd/m
LEDs/each optic	1
Light colour/type	White
Required components:	

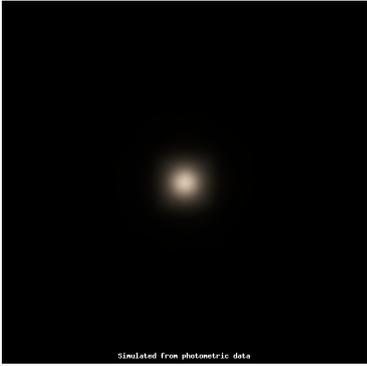

Simulated from photometric data

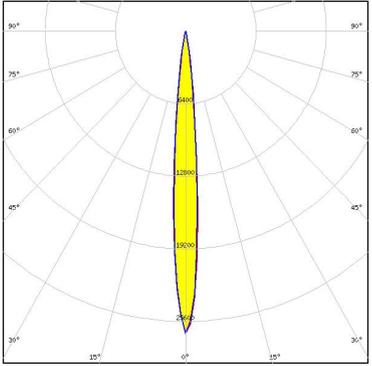

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24100 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)