

1-1670730-1 ✓ ACTIVE

AMP | Heavy Duty Sealed Connector Series

TE Internal #: 1-1670730-1

12 V / 24 V / 48 V, 3 Position, Automotive Housing for Male
Terminals, Wire-to-Wire, 4 mm [.157 in] Centerline, Heavy Duty
Sealed Connector Series

[View on TE.com >](#)



Automotive Parts > Automotive Connectors > Automotive Housings > 48V Ready 1.5mm Sealed Connectors



Nominal Voltage Architecture: 12 V, 24 V, 48 V

Connector & Housing Type: **Housing for Male Terminals**

Number of Positions: 3

Sealable: **Yes**

Operating Temperature Range: -40 – 140 °C [-40 – 284 °F]

[All 48V Ready 1.5mm Sealed Connectors \(19\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Male Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	3
Number of Rows	1

Electrical Characteristics

Operating Voltage	60 VDC
Nominal Voltage Architecture	12 V, 24 V, 48 V

Body Features

Cable Exit Angle	90 °, 180 °
Primary Product Color	Black



Connector & Keying Code	A
-------------------------	---

Contact Features

Contact Size	1.6mm
--------------	-------

Contact Type	Tab
--------------	-----

Mating Tab Width	1.6 mm[.063 in]
------------------	-----------------

Contact Current Rating (Max)	20 A
------------------------------	------

Mechanical Attachment

Strain Relief	Add By Accessory
---------------	------------------

Terminal Position Assurance	No
-----------------------------	----

Mating Alignment Type	Keyed
-----------------------	-------

Mating Alignment	With
------------------	------

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Housing Material	PBT GF
------------------	--------

Centerline (Pitch)	4 mm[.157 in]
--------------------	---------------

Dimensions

Product Width	47.05 mm[1.852 in]
---------------	--------------------

Product Length	27.6 mm[1.087 in]
----------------	-------------------

Connector Height	19 mm[.748 in]
------------------	----------------

Usage Conditions

Operating Temperature Range	-40 – 140 °C[-40 – 284 °F]
-----------------------------	----------------------------

Operating Temperature (Max)	140 °C[284 °F]
-----------------------------	----------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

IP Rating	IP67
-----------	------

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	1
--------------------	---

Packaging Method	Carton
------------------	--------

Other



Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1-1670730-2
3POS,TAB 1.5X0.63 TAB HSG MID
POS CLOSED



TE Part # CAT-T4827-T273
TIMER, RECEPTACLE AND TAB






TE Part # 1-1418448-1
3 POS. AMP MCP1.5k REC.HSG CO



TE Part # 1670365-2
COVER MIXED, 180, 2-3POS, NW4.5



Also in the Series | **Heavy Duty Sealed Connector Series**

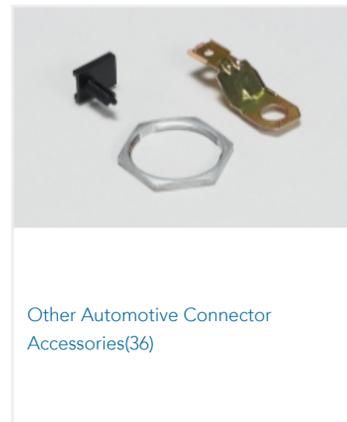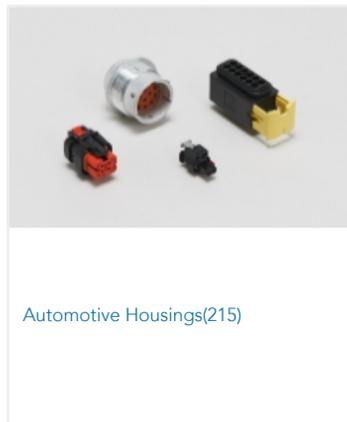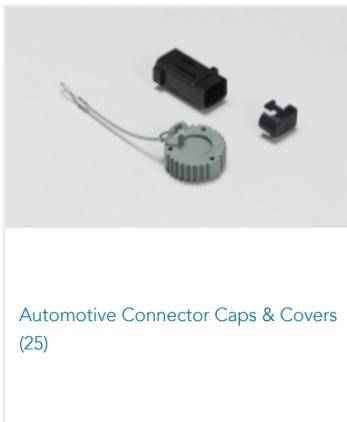

Customers Also Bought





Documents

Product Drawings

[3POS,TAB 1.5X0.63,TAB HSG,ASSY](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_1-1670730-1_H.2d_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_1-1670730-1_H.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1670730-1_H.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Heavy Duty Sealed Connector Series](#)

English

[HDSCS CAN Bus Y-Connector and 120 Resistor Brochure](#)

English

[HDSCS Catalog](#)

English

[ICT Terminals and Connectors Catalogue](#)

English

[CONNECTOR SELECTOR](#)

English

Product Specifications

[Application Specification](#)

English