

347887-3 ✓ ACTIVE

AMP | Junior Timer

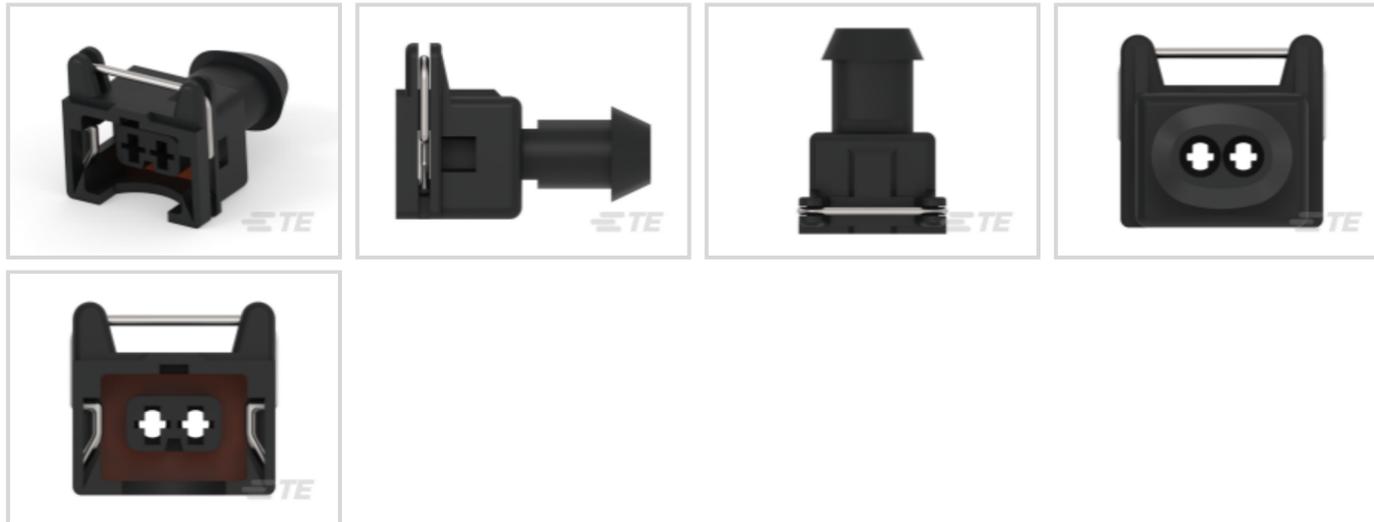
TE Internal #: 347887-3

12 V / 24 V, 2 Position, Automotive Housing for Female Terminals, Wire-to-Wire, 5 mm [.197 in] Centerline, Sealable, Black, Wire & Cable, Junior Timer

[View on TE.com >](#)



Automotive Parts > Automotive Connectors > Automotive Housings > Timer Connector Housing



Nominal Voltage Architecture: 12 V, 24 V

Connector & Housing Type: **Housing for Female Terminals**

Number of Positions: 2

Sealable: **Yes**

Operating Temperature Range: -40 – 130 °C [-40 – 266 °F]

[All Timer Connector Housing \(436\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	On the Terminal
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	2
Number of Rows	1

Electrical Characteristics

Operating Voltage	12 VDC
-------------------	--------



Nominal Voltage Architecture	12 V, 24 V
------------------------------	------------

Body Features

Cable Exit Angle	180 °
Primary Product Color	Black
Connector & Keying Code	Neutral

Contact Features

Contact Size	2.8mm
Contact Type	Receptacle
Mating Tab Width	2.8 mm [.11 in]
Contact Current Rating (Max)	30 A

Mechanical Attachment

Strain Relief	Without
Terminal Position Assurance	No
Mating Alignment Type	Polarization
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PA 6.6 GF30
Centerline (Pitch)	5 mm [.197 in]

Dimensions

Product Width	32.25 mm [1.27 in]
Product Length	23.4 mm [.921 in]
Connector Height	22 mm [.866 in]

Usage Conditions

Operating Temperature Range	-40 – 130 °C [-40 – 266 °F]
Operating Temperature (Max)	130 °C [266 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------

Packaging Features



Packaging Method	Box
------------------	-----

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | Junior Timer



Automotive Headers(3)



Automotive Housings(38)

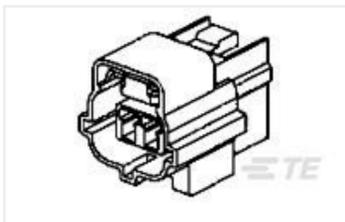
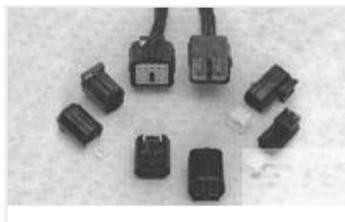
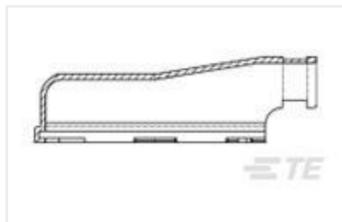
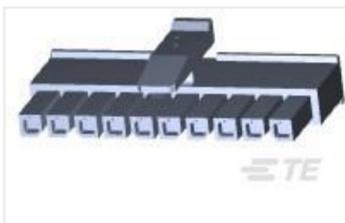


Automotive Signal & Power Connector Housings(38)



Busbars & Terminals(1)

Customers Also Bought

TE Part #1060-20-0244
PIN, SF, SIZE 20, 16-22, AU/SNTE Part #DT06-12SA-P004
PLG, 12P, GRY, N, ATE Part #234461-000
222D132-25/225-0TE Part #DRC26-50S01
PLG, 50P, BLK, N, 01TE Part #174352-2
070 ECONOSEAL MARK-2 PLUG 2PTE Part #344276-1
2 WAY REC HSG. SIL SEAL ECONOTE Part #965643-1
ABDECKKAPPE F42PTE Part #1-967281-1
MICRO-T2/JPT GEH42PTE Part #1-1445022-0
MICRO MNL RFECEPT HSG SINGLE RTE Part #345254-1
ANTI-BACKOUT 2WAY REC HSGECONO

Documents

Product Drawings

2 WAY JUNIOR TIMER CONN.

English

CAD Files

Customer View Model

[ENG_CVM_347887-3_O.3d_igs.zip](#)



English

Customer View Model

[ENG_CVM_347887-3_O.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_347887-3_O.2d_dxf.zip](#)

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[2 WAY JUNIOR POWER TIMER CONNECTOR \(ASSY. WITH GB. SILICONE SEAL\)](#)

English