

643232-1 ✓ ACTIVE

MATE-N-LOK | Universal MATE-N-LOK


TE Internal #: 643232-1

PCB Mount Header, Right Angle, Wire-to-Board, 5 Position, 6.35 mm [.25 in] Centerline, Fully Shrouded, Pre-Tin, Universal MATE-N-LOK

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles

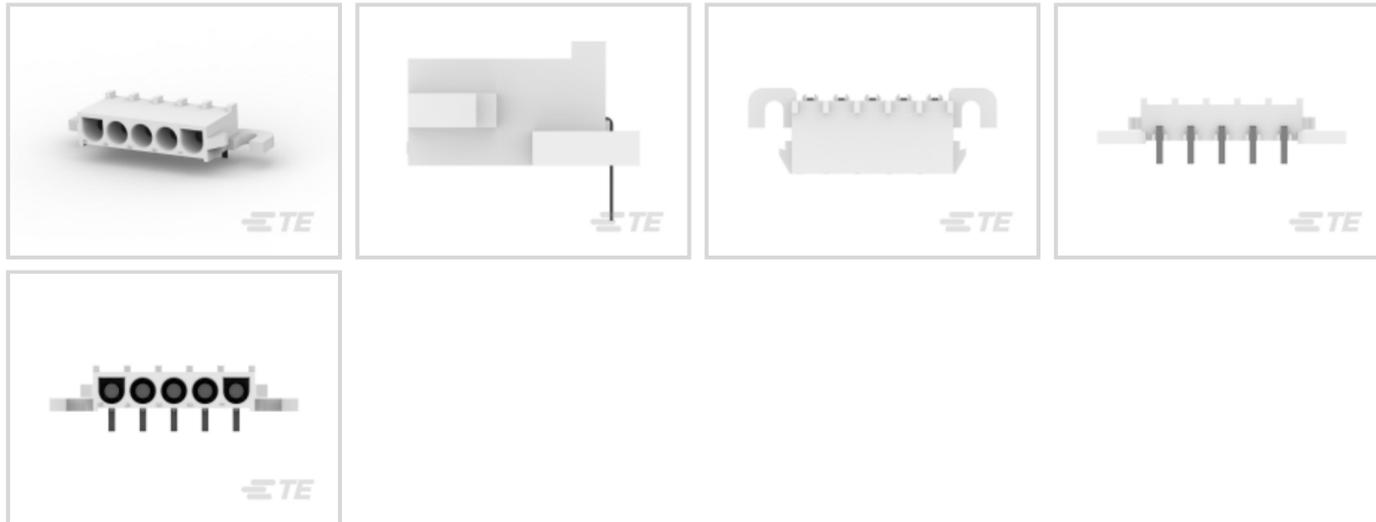

PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Right Angle**

Connector System: **Wire-to-Board**

Number of Positions: **5**

Centerline (Pitch): **6.35 mm [.25 in]**

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Columns	5
Number of Loaded Positions	5
Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Right Angle
Number of Positions	5



Number of Rows	1
----------------	---

Number of Power Positions	5
---------------------------	---

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

Contact Underplating Material	Nickel
-------------------------------	--------

Contact Underplating Material Thickness	1.27 – 1.79 μm [50 – 70 μin]
---	---

Contact Size	2.95mm
--------------	--------

Contact Shape & Form	Round
----------------------	-------

PCB Contact Termination Area Plating Material Thickness	3.81 – 5.08 μm [150 – 200 μin]
---	---

Contact Layout	Inline
----------------	--------

Contact Base Material	Phosphor Bronze
-----------------------	-----------------

Contact Mating Area Plating Material	Pre-Tin
--------------------------------------	---------

Contact Mating Area Plating Material Thickness	3.81 – 5.08 μm [150 – 200 μin]
--	---

Contact Type	Socket
--------------	--------

Contact Current Rating (Max)	12 A
------------------------------	------

PCB Contact Termination Area Plating Material	Pre-Tin
---	---------

Termination Features

Termination Post & Tail Length	4.06 mm[.16 in]
--------------------------------	-----------------

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Mechanical Attachment

Panel Mount Feature	Without
---------------------	---------

Mating Retention Type	Locking Tab
-----------------------	-------------

Mating Alignment Type	Polarization
-----------------------	--------------

PCB Mount Retention Type	Mounting Ears
--------------------------	---------------

PCB Mount Alignment	Without
---------------------	---------

Mating Retention	With
------------------	------

PCB Mount Retention	With
---------------------	------

Connector Mounting Type	Board Mount
-------------------------	-------------

Mating Alignment	With
------------------	------



Housing Features

Mating Entry Location	Side
Centerline (Pitch)	6.35 mm [.25 in]
Housing Material	Nylon

Dimensions

Connector Width	17.27 mm [.68 in]
PCB Thickness (Recommended)	1.57 mm [.062 in]
Connector Height	9.14 mm [.36 in]
Connector Length	50.67 mm [1.995 in]

Usage Conditions

Operating Temperature (Max)	105 °C [221 °F]
Operating Temperature Range	-40 – 105 °C [-40 – 221 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL, VDE
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	140
Packaging Method	Box

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250)

Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 643030-4
05P UMNL STR/REL



TE Part # 926306-5
UMNL 5 WAY CAP HSG




TE Part # 1-350589-0
STR/REL CLAMP NATL




TE Part # 350809-1
05P UMNL PLUG HSG



TE Part # 1969806-1
04P UMNL HDR ASSY R/A, SCKT V0 GW



TE Part # 643030-1
05P UMNL STR/REL



TE Part # 643030-2
05P UMNL STR/REL V2 NATL



TE Part # 350811-1
STR/REL CLAMP



TE Part # 350848-5
05P UMNL PLUG TEST ASSY 94V0



TE Part # 1969808-1
05P UMNL HDR ASSY R/A, PIN V0 GW



TE Part # 643030-3
05P UMNL STR/REL V2 NATL



TE Part # 770016-1
05P UMNLII IN-LNE PLUG HSG KIT

Also in the Series | Universal MATE-N-LOK



Circular Power Connectors(2)



Connector Contacts(205)



Connector Hardware(12)



Power Contacts(205)



Rectangular Power Connectors(644)



Standard Circular Connectors(1)


Customers Also Bought



TE Part #825440-8
OD 2 PINHDR 2X08P.



TE Part #3-826632-6
36P AMPMODU II STIFT LEI

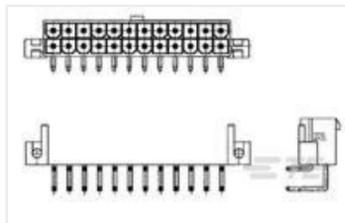

TE Part #1-1586043-0
10P VAL-U-LOK R/A HDR SCRMT V2



TE Part #2098251-2
SOC, SF, SIZE 16, 16-18 AWG, NI/SN



TE Part #4-2176363-7
RQ 0402 1K3 0.1% 10PPM 5K RL



TE Part #6-2176363-3
RQ 0402 1K91 0.1% 10PPM 5K RL



TE Part #6-2176363-6
RQ 0402 2K05 0.1% 10PPM 5K RL



TE Part #8-2176363-2
RQ 0402 3K01 0.1% 10PPM 5K RL



TE Part #3-2176364-5
RQ 0402 10K5 0.1% 10PPM 5K RL



TE Part #4-2176364-0
RQ 0402 11K8 0.1% 10PPM 5K RL



Documents

Product Drawings

05P UMNL HDR ASSY R/A 94VO

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_643232-1_H.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_643232-1_H.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_643232-1_H.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_643232-1_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_643232-1_D.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_643232-1_D.2d_dxf.zip](#)

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_SOCKET_CONNECTORS_STANDARD_DENSITY

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL

English

643232-1

PCB Mount Header, Right Angle, Wire-to-Board, 5 Position, 6.35 mm [.25 in]
Centerline, Fully Shrouded, Pre-Tin, Universal MATE-N-LOK

