



BACK VIEW

Material : Nylon66 UL 94V-0

Ordering Code:

CP35 \*\* S 001 S -NH  
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Connector: 02 to 12
- ③ Contact type: S = Receptacle
- ④ Color: 001 = Color Black
- ⑤ Option: S = Single Row
- ⚠ ⑥ -NH = Halogen-Free

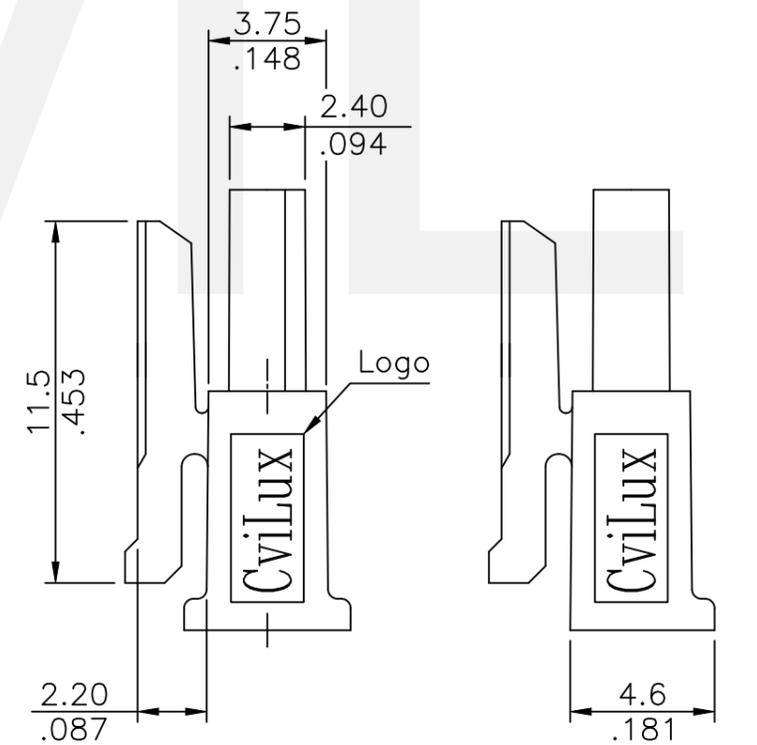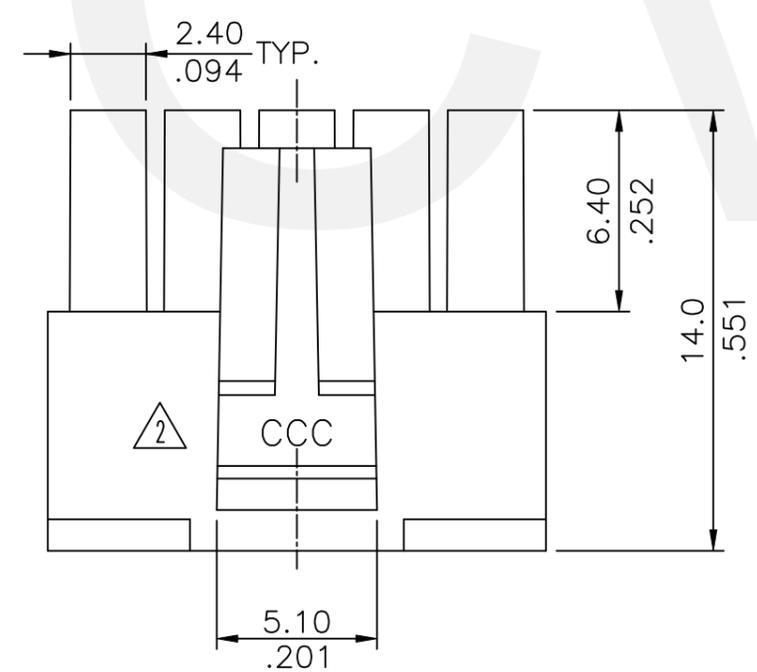

Other Circuits

2 Circuits

Circuits	Dimension	
	A	B
2	3.00(.118)	6.9(.272)
3	6.00(.236)	9.9(.390)
4	9.00(.354)	12.9(.508)
5	12.00(.472)	15.9(.626)
6	15.00(.591)	18.9(.744)
7	18.00(.709)	21.9(.862)
8	21.00(.827)	24.9(.980)
9	24.00(.945)	27.9(1.098)
10	27.00(1.063)	30.9(1.217)
11	30.00(1.181)	33.9(1.335)
12	33.00(1.299)	36.9(1.453)

Halogen-Free RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 3.00mm PITCH POWER CONNECTOR FEMALE HOUSING	瀚荃股份有限公司 CviLux Corporation	
③					DRAWN BY: Roy	12/16-24'	TOLERANCE UNLESS OTHERWISE SPECIFIED		
②	Roy	12/16-24'	ECNT124346	<div style="border: 2px solid red; border-radius: 50%; padding: 5px; display: inline-block; text-align: center;"> <b>CviLux Corp</b>  <b>2024/12/26</b>  <b>ISSUED</b> </div>	ENGINEER: Karen	12/16-24'	.X ±0.30/.012 X' ± 1'	MATERIAL:	
①	Sandy	6/11-19'	ECNT119143		CHECKED BY: Sun	12/16-24'	.XX ±0.20/.008 X' ±	CUSTOMER: TCF0012	DRAWING NO. CP3512AC PART NO. CP35**S001S-NH
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	12/16-24'	.XXX ±0.10/.004 X' ±	SCALE 3 / 1 SHEET 1 OF 1	