

2-5229913-1 ✓ ACTIVE

CHAMP | CHAMP Docking Connectors

TE Internal #: 2-5229913-1

50 Position D-Shaped Connector, Receptacle, Cable-to-Board / Cable-to-Cable, Cable Mount (Free-Hanging), CHAMP Docking Connectors

[View on TE.com >](#)



Connectors > D-Shaped Connectors > IDC D-Sub: Receptacle Kit, Signal, 50, 2.16 mm



Number of Positions: 50

Connector & Housing Type: Receptacle

Connector System: Cable-to-Board, Cable-to-Cable

Connector Mounting Type: Cable Mount (Free-Hanging)

Centerline (Pitch): 2.16 mm [.085 in]

[All IDC D-Sub: Receptacle Kit, Signal, 50, 2.16 mm \(8\)](#)

Features

Product Type Features

Connector & Housing Type	Receptacle
Connector System	Cable-to-Board, Cable-to-Cable
Connector Product Type	Connector Kit
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	50
Number of Rows	2
Compatible With Wire & Cable Type	Discrete Wire, Round Jacketed Cable

Body Features

Connector Profile	Standard
-------------------	----------

Contact Features

Contact Underplating Material	Palladium Nickel
Contact Mating Area Plating Material	Gold or Gold Flash
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material Thickness	.76 µm[30 µin]
Contact Current Rating (Max)	.5 A, 1 A
Contact Options	Supplied – Uninstalled

Termination Features

Termination Method to Wire & Cable	Insulation Displacement (IDC)
------------------------------------	-------------------------------

Mechanical Attachment

Mating Retention	With
Mating Retention Type	Screwlocks
Thread Size	4-40
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	Polyphenylene Oxide
Centerline (Pitch)	2.16 mm[.085 in]

Dimensions

Compatible Cable Insulation Diameter Range	10.8 – 12.7 mm[.425 – .5 in]
Solid Wire Size	26 – 24 AWG
Compatible Cable Diameter (Max)	12.7 mm[.5 in]
Compatible Insulation Diameter (Max)	1.14 mm[.045 in]
Stranded Wire Size	.33 mm ²
Wire Size	26 – 24 AWG

Usage Conditions

Operating Temperature Range	-40 – 75 °C[-40 – 167 °F]
-----------------------------	---------------------------

Operation/Application

Shielded	Yes
Circuit Application	Signal

Packaging Features

Packaging Method	Bag
Packaging Quantity	1

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JUNE 2025 (250)

Candidate List Declared Against: JUNE 2025 (250)

Does not contain REACH SVHC

Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Not applicable for solder process capability

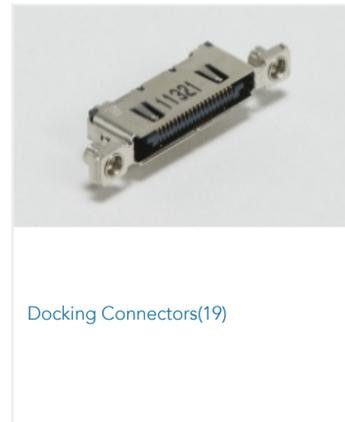
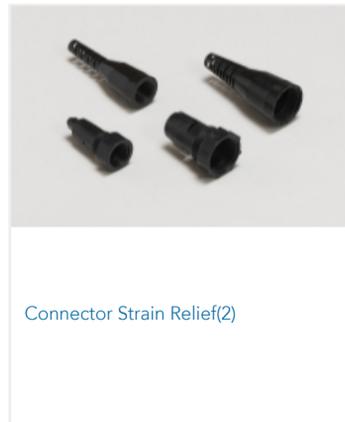
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | CHAMP Docking Connectors



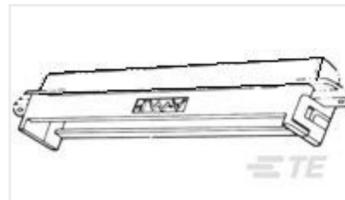
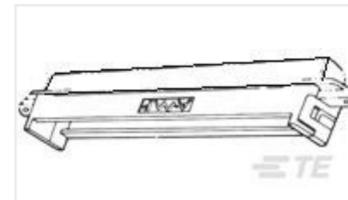
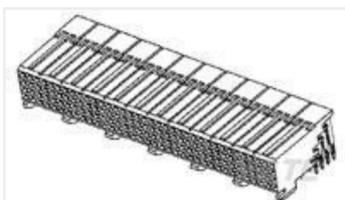


IDC D-Sub Connectors(41)



Panel Mount D-Sub Connectors(5)

Customers Also Bought

TE Part #36150
PIDG R 22-16 COMM 22-18 MIL 6TE Part #2-382811-1
SHUNT, ECON, PHBRSN, BLACKTE Part #553443-4
ASSY RCPT,ACTION PIN,CHAMP-LOKTE Part #553444-4
PLUG ASSY,ACTION PIN,CHAMP-LOKTE Part #640452-2
02P MTA100 HDR ASSY SQ STRTE Part #1-5747150-4
09 RCPT SP/FMS SCRLKTE Part #1-552027-1
STRAIN RELIEF, 50 POS, CHAMPTE Part #1-552296-1
STRAIN RELIEF 64 POS BLACKTE Part #5536511-3
2MM FB,ASY,096,SIG,REC,EN,3.55TE Part #382811-5
SHUNT, ECON, PHBRSN, BLACK

Documents

CAD Files

Customer View Model

[ENG_CVM_CVM_2-5229913-1_O.2d_dxf.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_2-5229913-1_O.3d_igs.zip](#)

2-5229913-1

50 Position D-Shaped Connector, Receptacle, Cable-to-Board / Cable-to-Cable,
Cable Mount (Free-Hanging), CHAMP Docking Connectors



English

Customer View Model

[ENG_CVM_CVM_2-5229913-1_O.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.