

3-338313-2 ✓ ACTIVE




AMPLIMITE

TE Internal #: 3-338313-2

9 Position D-Shaped Connector, Receptacle, Cable-to-Board,
Board Mount, Shell Size 1, 2.74 mm [.108 in] Centerline, Printed
Circuit Board, Signal

[View on TE.com >](#)

Connectors > D-Shaped Connectors > D-Sub Receptacle Assembly: Vertical, Shell Size 1, 2.74mm

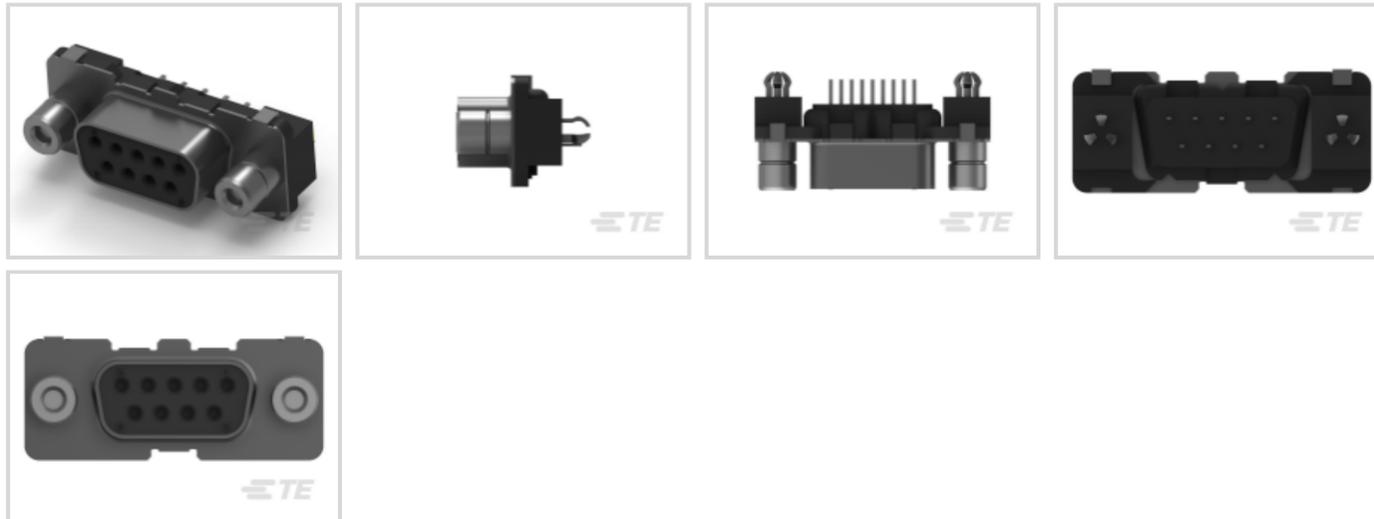

Number of Positions: 9

Connector & Housing Type: **Receptacle**

Connector System: **Cable-to-Board**

Connector Mounting Type: **Board Mount**

Connector Shell Size: 1

[All D-Sub Receptacle Assembly: Vertical, Shell Size 1, 2.74mm \(37\)](#)

Features

Product Type Features

Shell Material Configuration	Front Metal Shell
Connector & Housing Type	Receptacle
Connector System	Cable-to-Board
Connector Shell Size	1
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	9
Number of Rows	2
PCB Mount Orientation	Vertical

Body Features

Assembly Process Feature Material	Phosphor Bronze
Shell Plating Material	Tin



Primary Product Color	Black
-----------------------	-------

Connector Profile	Standard
-------------------	----------

Contact Features

	30 μ m
--	------------

Contact Underplating Material	Nickel
-------------------------------	--------

Contact Mating Area Plating Material	Gold (Au)
--------------------------------------	-----------

Contact Base Material	Phosphor Bronze
-----------------------	-----------------

PCB Contact Termination Area Plating Material	Tin
---	-----

Contact Shape & Form	Round
----------------------	-------

Contact Current Rating (Max)	6 A
------------------------------	-----

Contact Options	Installed
-----------------	-----------

Termination Features

Rectangular Termination Post & Tail Width	.45 mm[.017 in]
---	-----------------

Rectangular Termination Post & Tail Thickness	.32 mm[.012 in]
---	-----------------

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Termination Post & Tail Length	3.2 mm[.126 in]
--------------------------------	-----------------

Mechanical Attachment

Mounting Hole Diameter	5 mm
------------------------	------

Assembly Process Feature Plating Material	Tin
---	-----

Connector Mounting Type	Board Mount
-------------------------	-------------

PCB Mount Retention	With
---------------------	------

PCB Mount Retention Type	Boardlock
--------------------------	-----------

Mating Retention	With
------------------	------

Mating Retention Type	Female Screwlocks, 4-40 UNC
-----------------------	-----------------------------

Housing Features

Housing Material	Polyester GF
------------------	--------------

Shell Material	Steel
----------------	-------

Centerline (Pitch)	2.74 mm[.108 in]
--------------------	------------------

Dimensions

PCB Thickness (Recommended)	1.6 mm[.063 in]
-----------------------------	-----------------

Row-to-Row Spacing	2.84 mm[.112 in]
--------------------	------------------

Usage Conditions



Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Durability Rating	200 Cycles
Shielded	No
Circuit Application	Signal

Industry Standards

UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	DIN 41652

Packaging Features

Packaging Quantity	55
Packaging Method	Tray

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) SVHC > Threshold: Pb (.35% in 74025572) <small>Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.</small>
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 5-747904-8
 9 Plug Solder Cup, G/F w/ CN,



TE Part # CAT-AM7-248H3
 IDC D-Sub: Plug Assembly, Wire to Wire, Signal, 2.77 mm



TE Part # 1-747944-5
 09 SHLDG ENCL PLUG, LEAD FREE



TE Part # 206509-1
 SIZE 20 KEYING PLUG



TE Part # CAT-AM7-H3
 IDC D-Sub: Plug Assembly, Low Profile, Signal, 2.77 mm

Customers Also Bought



TE Part # 282901-2
 TERMI-BLOK PCB MOUNT 2ND 2P.5,



TE Part # 282901-3
 TERMI-BLOK PCB MOUNT 2ND 3P.5,




TE Part # 4-794630-8
 18P MICRO MNL ASSY,VRT,HDR,LF



TE Part # 826467-8
 8P MOD II SHROUDED HEADER, ST



TE Part # 826468-4
 4P MOD II SHROUDED HEADER, RT ANG.



TE Part # 826648-8
 08P AMPMODU II PIN HDR.



TE Part # 827311-2
 2P MOD2 PIN HEADER



TE Part # 3-928776-6
 MOD II ACTION PIN SILVER PLATED



Documents

Product Drawings

[9P.HDP20 REC. ASSY](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_3-338313-2_E_c-3-338313-2-e.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-338313-2_E_c-3-338313-2-e.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-338313-2_E_c-3-338313-2-e.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Product Specification](#)

English