

5745185-7 ✓ ACTIVE

AMPLIMITE | AMPLIMITE HD-20


TE Internal #: 5745185-7

15 Position D-Shaped Connector, Receptacle, Board-to-Board,  
Board Mount, Shell Size 2, 2.74 mm [.108 in] Centerline, AMPLIMITE  
HD-20

[View on TE.com >](#)



Connectors > D-Shaped Connectors > D-Sub Receptacle Assembly: Vertical, Shell Size 2, 2.74mm

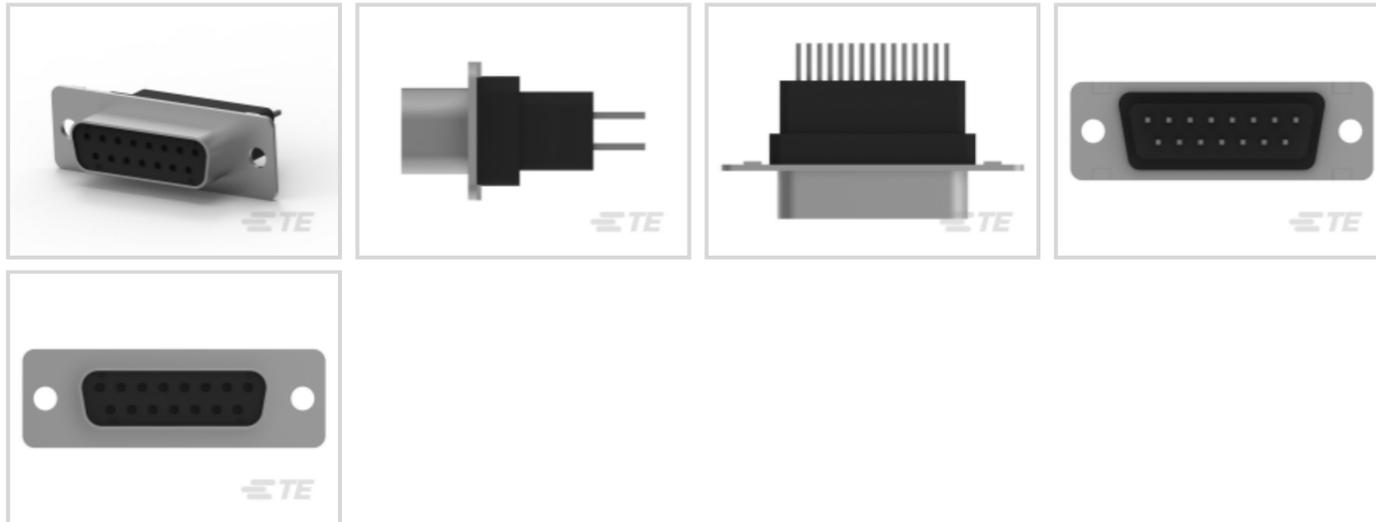

Number of Positions: 15

Connector & Housing Type: Receptacle

Connector System: Board-to-Board

Connector Mounting Type: Board Mount

Connector Shell Size: 2

[All D-Sub Receptacle Assembly: Vertical, Shell Size 2, 2.74mm \(26\)](#)

## Features

### Product Type Features

Shell Material Configuration	Full Metal Shell
Connector & Housing Type	Receptacle
Connector System	Board-to-Board
Connector Shell Size	2
Connector & Contact Terminates To	Printed Circuit Board

### Configuration Features

Number of Positions	15
Number of Rows	2
PCB Mount Orientation	Vertical

### Body Features

Insert Material	Thermoplastic
Shell Plating Material	Tin



Connector Profile	High
<b>Contact Features</b>	
	30 µin
Contact Underplating Material	Nickel
Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin
Contact Shape & Form	Square
Contact Current Rating (Max)	6 A
Contact Options	Installed
<b>Termination Features</b>	
Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	4.78 mm[.188 in]
Square Termination Post & Tail Dimension	.63 mm[.025 in]
<b>Mechanical Attachment</b>	
Mounting Hole Diameter	3.05 mm[.12 in]
Connector Mounting Type	Board Mount
PCB Mount Retention	With
PCB Mount Retention Type	Mounting Hole
Mating Retention	Without
<b>Housing Features</b>	
Shell Material	Steel
Centerline (Pitch)	2.74 mm[.108 in]
<b>Dimensions</b>	
PCB Thickness (Recommended)	2.36 – 3.18 mm[.093 – .125 in]
Row-to-Row Spacing	2.84 mm[.112 in]
<b>Usage Conditions</b>	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
<b>Operation/Application</b>	
Circuit Application	Signal
<b>Industry Standards</b>	
UL Flammability Rating	UL 94V-0

## Packaging Features

Packaging Quantity	10
Packaging Method	Tube

## Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts





## Also in the Series | **AMPLIMITE HD-20**

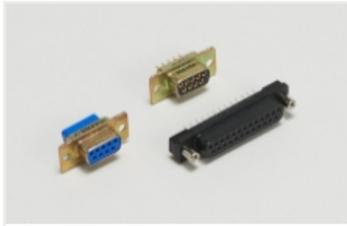

D-Shaped Connectors(285)



PCB D-Sub Connectors(285)

## Customers Also Bought



TE Part #354080-E  
SMCQ 32 F AB VV 7-03 CL \* 0007 137  
E002



TE Part #254589-E  
SMCQ 32 M AB VV 8-13 CL \* H007 137  
E005



TE Part #120958-1  
UPM EXPANDED PIN ASSEMBLY




TE Part #1-292303-6  
Std USB Type A, R/A, SMT, Offset



TE Part #6-1879224-0  
CPF 0603 13K7 0.1% 25PPM 1K RL



TE Part #4-2176328-7  
CRGP 1206 68K 1%

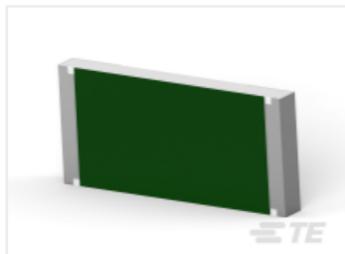

TE Part #5-2176403-6  
3550 200R 1%



TE Part #2-5353515-0  
ON TAPING (EMBOSS) 0.5MM FS  
CONN. TAB AS



TE Part #CAT-020-ADRV127  
AMPLIMITE D-Sub Receptacle  
Assembly: Vertical, 1.27mm

## Documents

**Product Drawings**  
**15 RCPT SP/MS STD**

English

**CAD Files**  
**3D PDF**

English



**Customer View Model**

[ENG\\_CVM\\_5745185-7\\_B.2d\\_dxf.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_5745185-7\\_B.3d\\_igs.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_5745185-7\\_B.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

**Datasheets & Catalog Pages**

[AMPLIMITE Subminiature D Connectors - Straight Posted Connectors](#)

English

---

**Product Specifications**

[Application Specification](#)

English

---

**Agency Approvals**

[UL Report](#)

English