


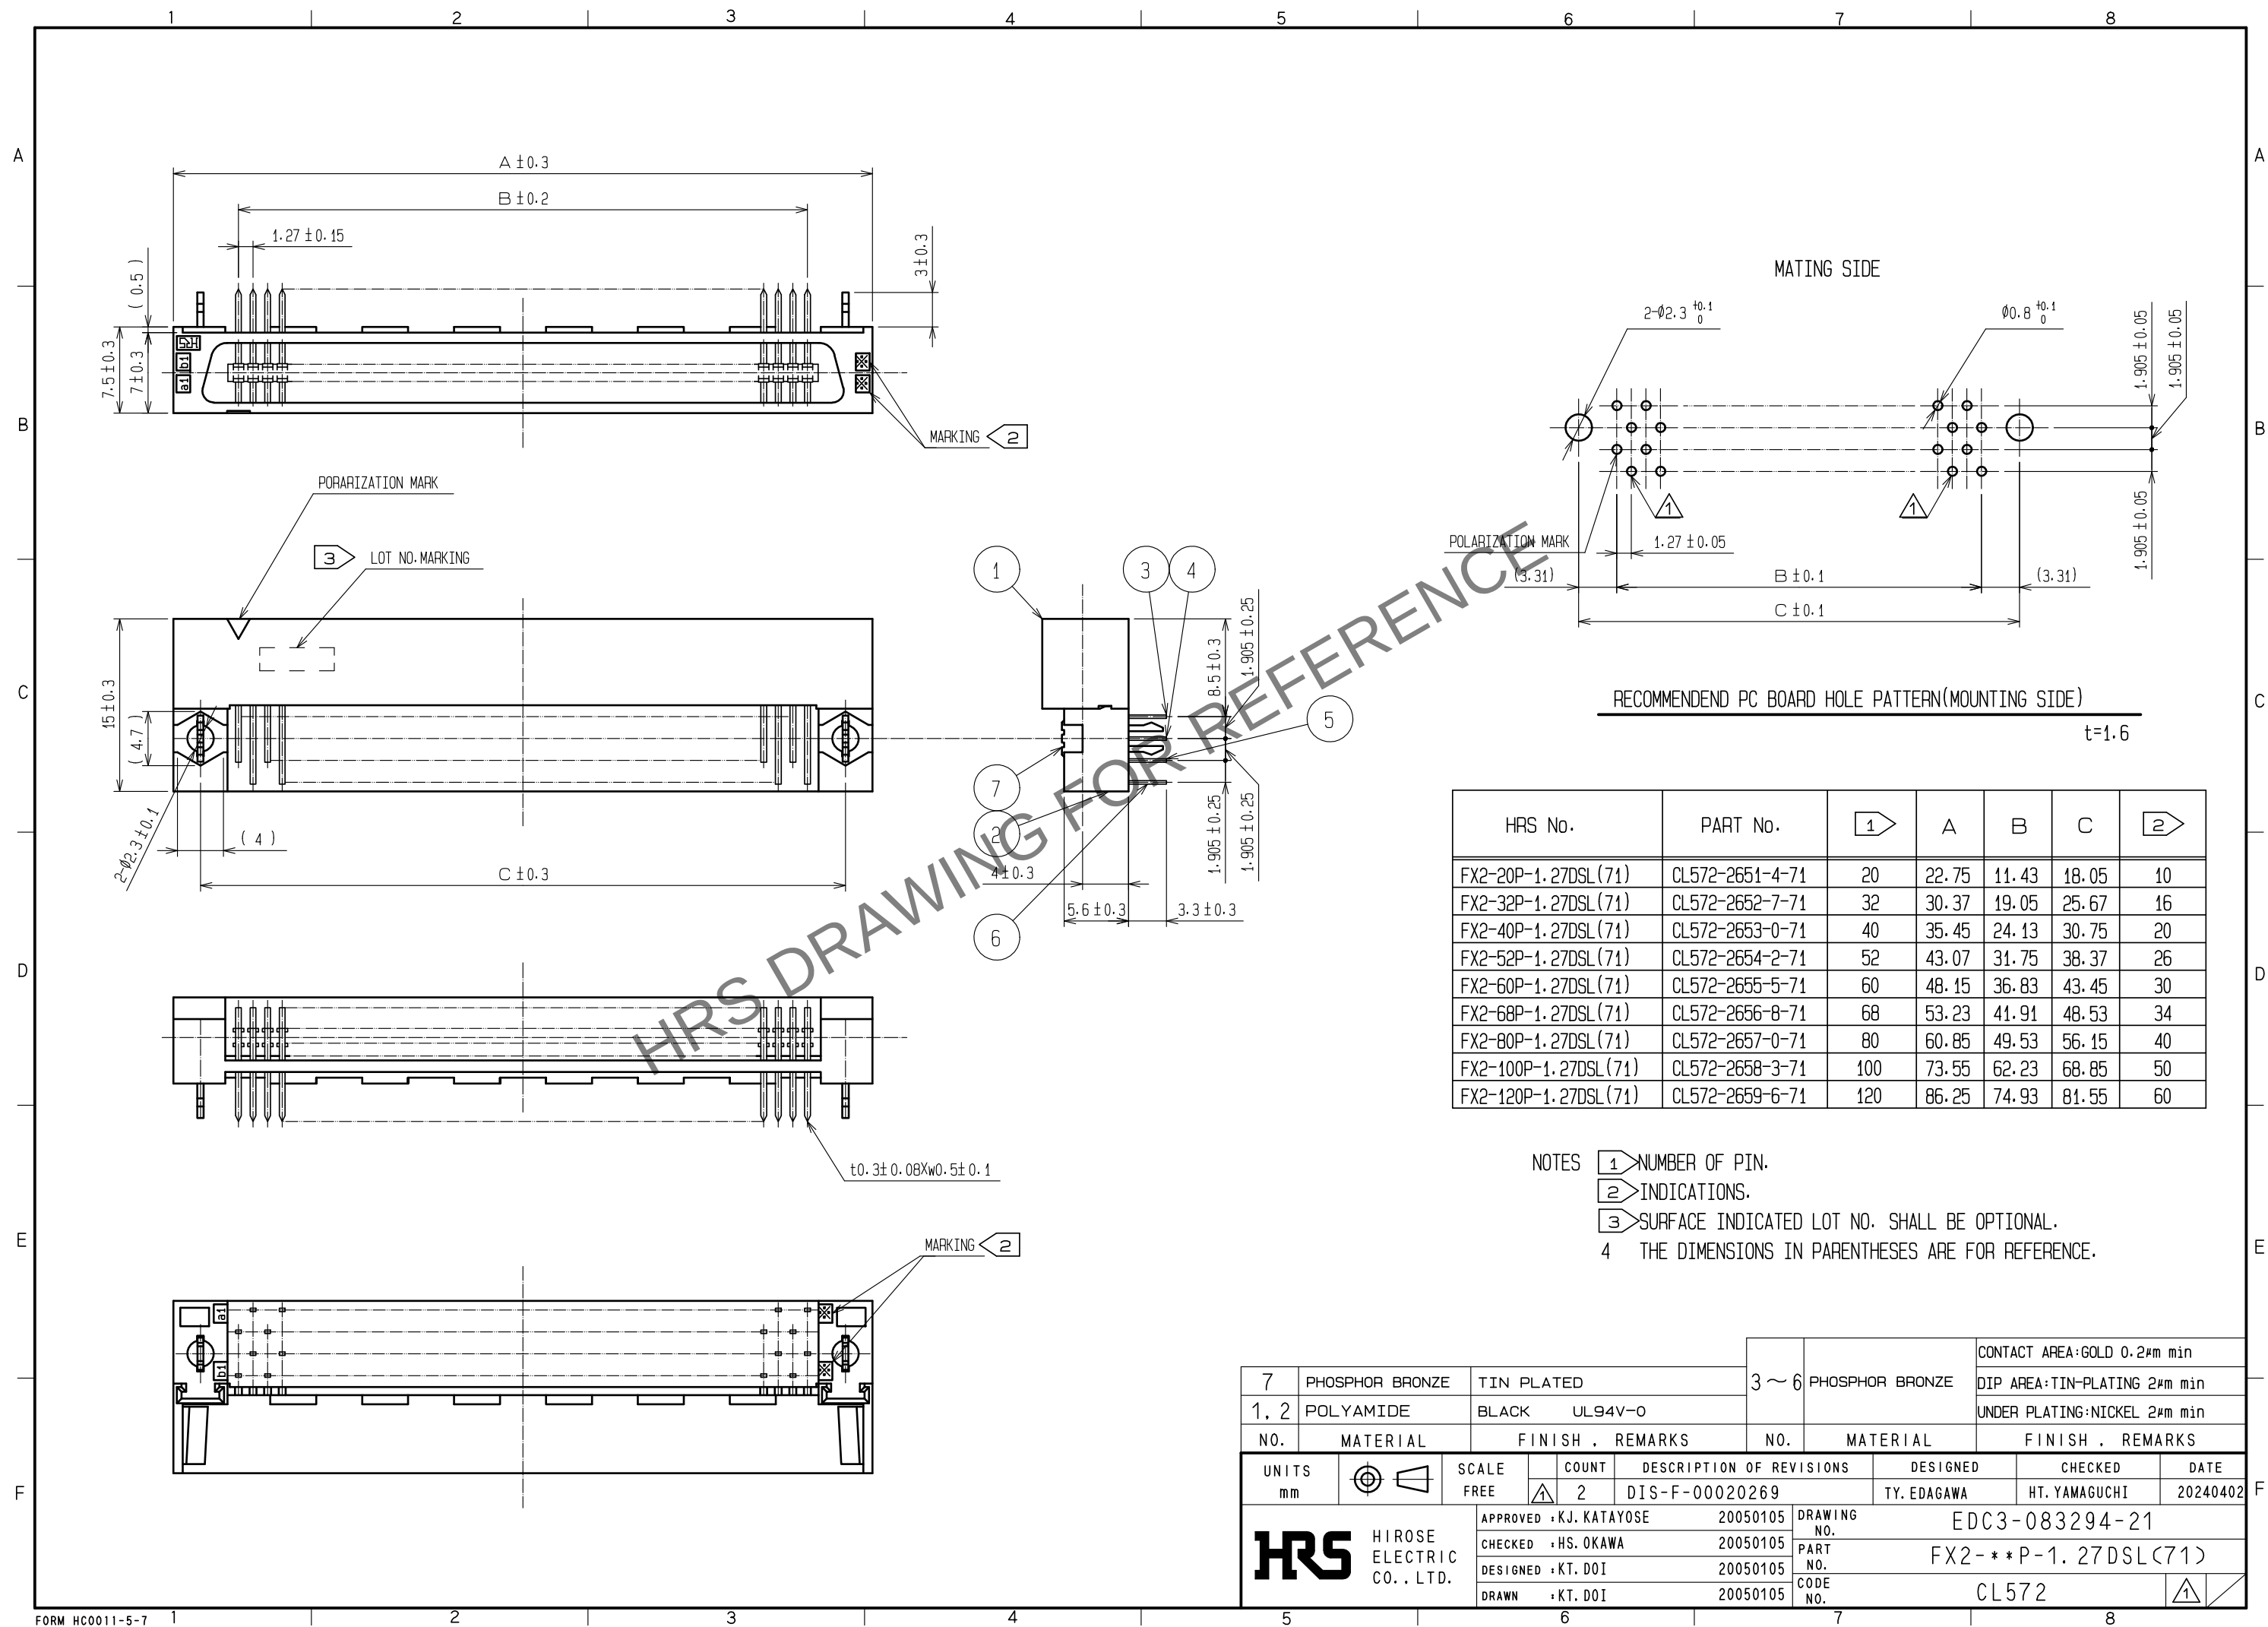

HRS No.	PART No.		A	B	C	
FX2-20P-1.27DSL (71)	CL572-2651-4-71	20	22.75	11.43	18.05	10
FX2-32P-1.27DSL (71)	CL572-2652-7-71	32	30.37	19.05	25.67	16
FX2-40P-1.27DSL (71)	CL572-2653-0-71	40	35.45	24.13	30.75	20
FX2-52P-1.27DSL (71)	CL572-2654-2-71	52	43.07	31.75	38.37	26
FX2-60P-1.27DSL (71)	CL572-2655-5-71	60	48.15	36.83	43.45	30
FX2-68P-1.27DSL (71)	CL572-2656-8-71	68	53.23	41.91	48.53	34
FX2-80P-1.27DSL (71)	CL572-2657-0-71	80	60.85	49.53	56.15	40
FX2-100P-1.27DSL (71)	CL572-2658-3-71	100	73.55	62.23	68.85	50
FX2-120P-1.27DSL (71)	CL572-2659-6-71	120	86.25	74.93	81.55	60

NOTES

- 1 NUMBER OF PIN.
- 2 INDICATIONS.
- 3 SURFACE INDICATED LOT NO. SHALL BE OPTIONAL.
- 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

7		PHOSPHOR BRONZE	TIN PLATED		3 ~ 6	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.2mm min		
1, 2		POLYAMIDE	BLACK UL94V-0				DIP AREA: TIN-PLATING 2mm min		
NO.		MATERIAL	FINISH . REMARKS				UNDER PLATING: NICKEL 2mm min		
UNITS mm			SCALE FREE	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
				2	DIS-F-00020269		TY. EDAGAWA	HT. YAMAGUCHI	20240402
HIROSE ELECTRIC CO., LTD.			APPROVED : K.J. KATAYOSE	20050105	DRAWING NO. EDC3-083294-21				
			CHECKED : HS. OKAWA	20050105	PART NO. FX2-*P-1. 27DSL(71)				
			DESIGNED : KT. DOI	20050105	CODE NO. CL572				
			DRAWN : KT. DOI	20050105					