

100161-1 ✓ ACTIVE

Z-PACK | Z-PACK 2mm HM

TE Internal #: 100161-1

Hard Metric Backplane PCB Mount Receptacle, ≤ 1 Gb/s, 11 Column, 5 Row, Mezzanine, 55 Position, 2 mm [.078 in] Centerline, Right Angle, Z-PACK 2mm HM

[View on TE.com >](#)



[Connectors >](#) [PCB Connectors >](#) [Backplane Connectors >](#) [Hard Metric Backplane Connectors >](#)

HM Receptacle Connector: Traditional Backplane, Coplanar, 2mm



PCB Connector Type: **PCB Mount Receptacle**

Data Rate: ≤ 1 Gb/s

Number of Columns: 11

Number of Rows: 5

Backplane Architecture: **Mezzanine**

[All HM Receptacle Connector: Traditional Backplane, Coplanar, 2mm \(48\)](#)

Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Backplane Interface Type	2mm HM
Connector System	Board-to-Board
PCB Connector Type	PCB Mount Receptacle
Sealable	No

Configuration Features

Rows Loaded	A, B, C, D, E
Number of Columns	11
Number of Rows	5
Backplane Architecture	Mezzanine
Number of Positions	55
PCB Mount Orientation	Right Angle



Signal Characteristics

Crosstalk Version	Standard
Data Rate	≤1 Gb/s

Body Features

Primary Product Color	Gray
-----------------------	------

Contact Features

Contact Underplating Material	Nickel
Contact Mating Area Length	3.7 mm
Contact Base Material	Phosphor Bronze
CompactPCI Designation	None
PCB Contact Termination Area Plating Material	Tin-Lead
Contact Type	Socket
Feedthrough Post Length	3.7 mm
Contact Mating Area Plating Material	Gold (Au)
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Contact Current Rating (Max)	1.5 A

Termination Features

Termination Method to PCB	Through Hole - Press-Fit
---------------------------	--------------------------

Mechanical Attachment

Connector Mounting Type	Board Mount
Mating Alignment Type	Guide Lugs

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	2 mm [.078 in]

Dimensions

Backplane Module Length	25 mm
-------------------------	-------

Usage Conditions

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Shielded	No
Circuit Application	Power & Signal



Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	22
Packaging Method	Tube

Product Compliance


For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) SVHC > Threshold: Pb (13% in 4690948374) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 646480-1
2MM H.M., C SHROUD 3MM




TE Part # 646480-2
2MM H.M., C SHROUD 3.9MM



TE Part # 106012-1
Z-PACK/C RAMH. 55P.

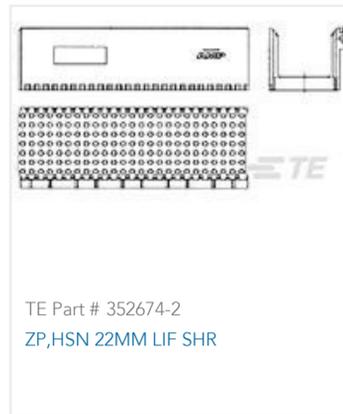

TE Part # 352674-2
ZP,HSN 22MM LIF SHR

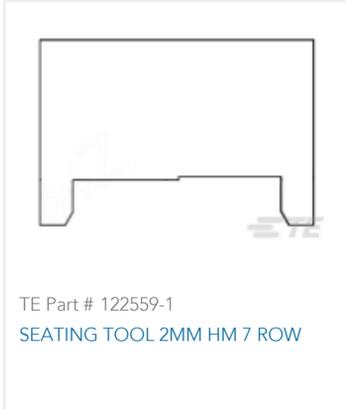

TE Part # 122559-1
SEATING TOOL 2MM HM 7 ROW



TE Part # 100159-1
2MM HDR, 55 POS EXTN MOD

Also in the Series | Z-PACK 2mm HM




Board-to-Board Headers & Receptacles(46)



Connector Contacts(1)



Connector Hardware(91)



Hard Metric Backplane Connectors (264)




Power Contacts(1)




Rectangular Power Connectors(46)

Customers Also Bought



TE Part #100143-1
PACK/A MALE HDR 110P, 2MM HM



TE Part #6-100525-3
CODING DEV INSRT COLOR ORANGE



TE Part #2-338309-2
9P.HDP20 PLUG ASSY



TE Part #1-770970-1
08P MINI UMNL R/A HDR ASSY LF



TE Part #1-1827872-7
DYNAMIC 1100D HDR ASSY V 34P
XBLACK GOLD




TE Part #1903977-1
SLIM UPM 4POS. R/A HDR ASSEMBL




TE Part #2102847-1
DC, 7Row, Center, MULTIGIG RT 2R



TE Part #2170707-6
CAGE ASSY, 1X6, QSFP28, SPRING,
HS



TE Part #5055556-9
10 POWER TAP ASSY .125



TE Part #5207908-4
STRAIN REL W/SCREW RET KIT

Documents

Product Drawings

Z-PACK/C F-HDR 55P

English

CAD Files

3D PDF

English

Customer View Model

[ENG_CVM_100161-1_H.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_100161-1_H.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_100161-1_H.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Instruction Sheets

INSERTION TOOL FOR Z-PACK 2mm HM CONN.

Japanese

Instruction Sheet (non U.S.)

Japanese

100161-1

Hard Metric Backplane PCB Mount Receptacle, ≤ 1 Gb/s, 11 Column, 5 Row,
Mezzanine, 55 Position, 2 mm [.078 in] Centerline, Right Angle, Z-PACK 2mm HM

