
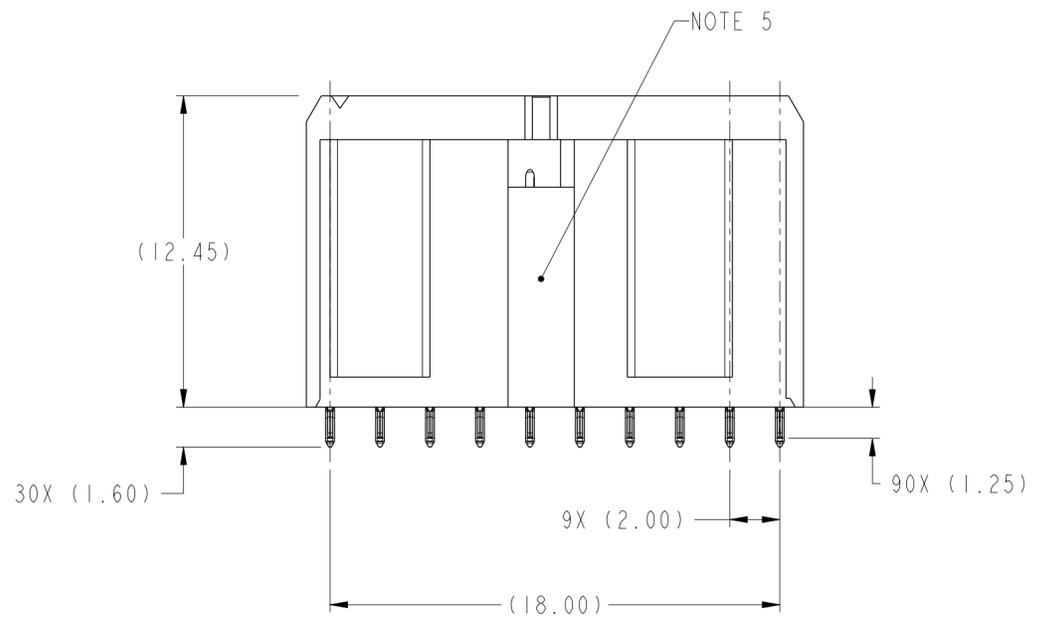
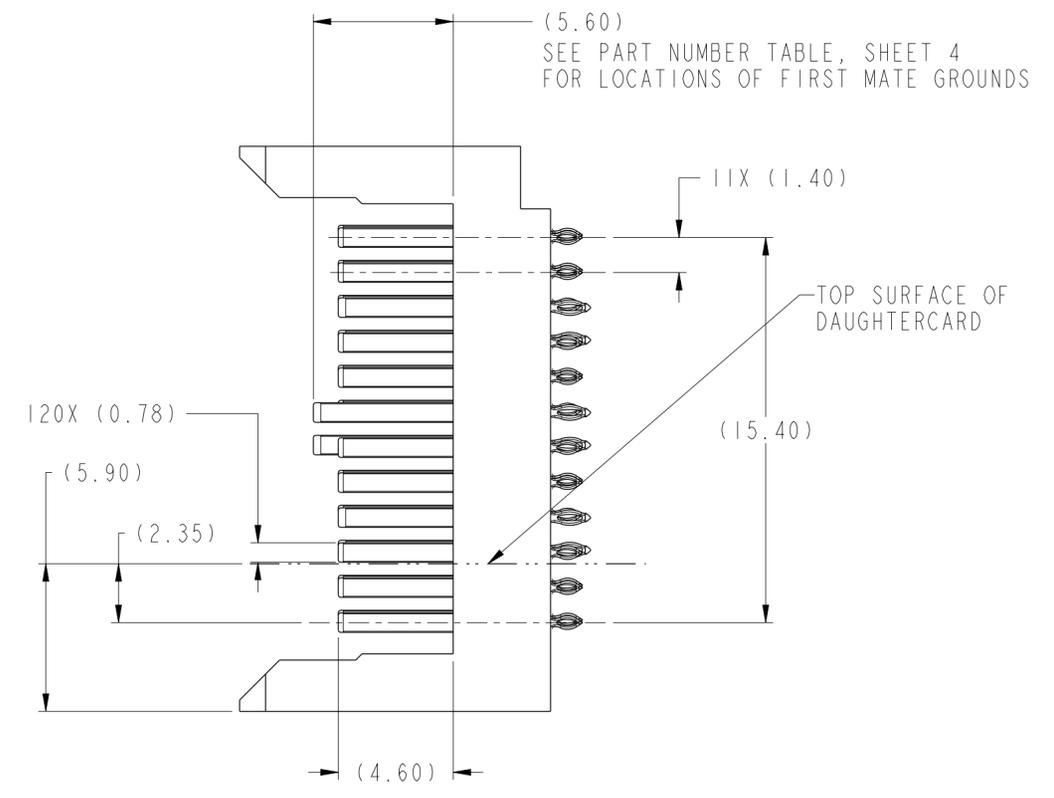




Product number
SEE TABLE, SHT 4

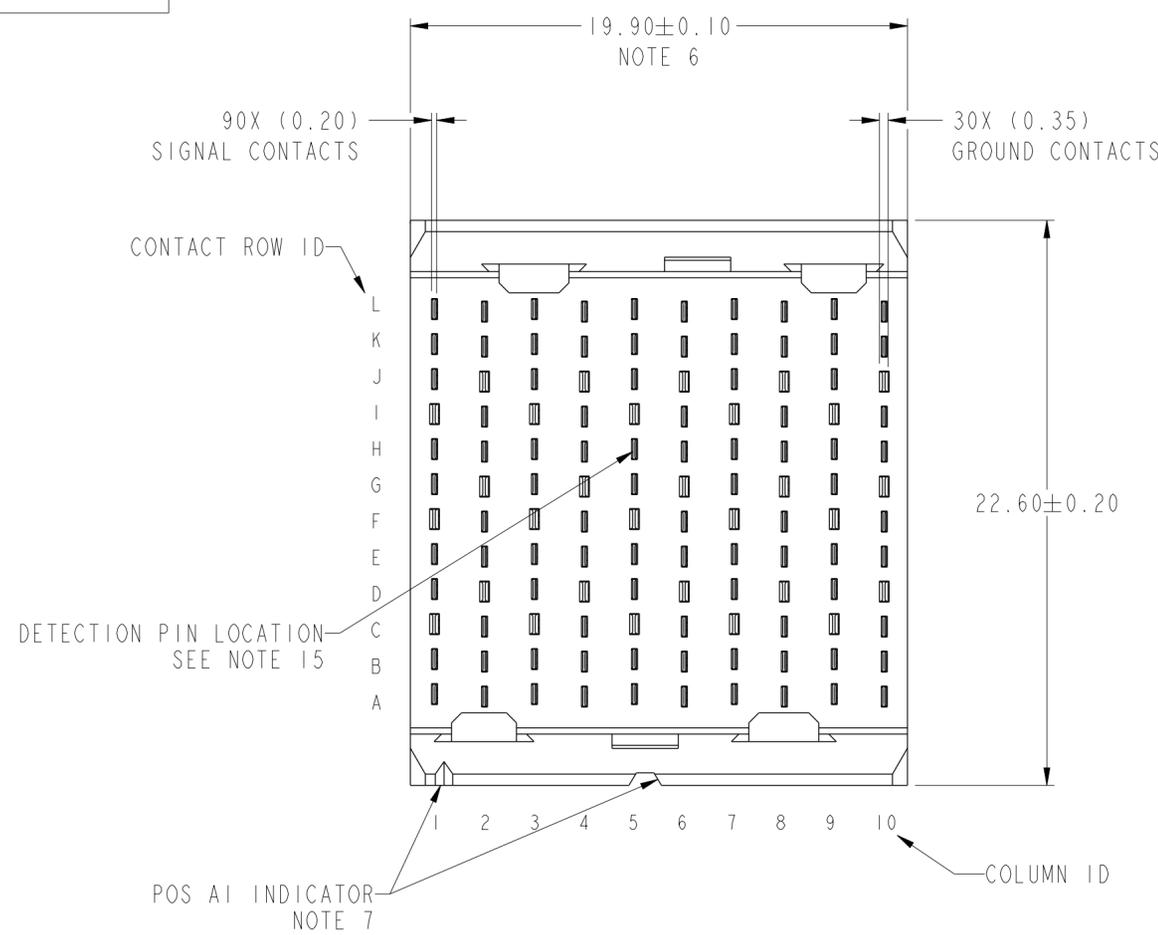


spec ref	-	dr	Sander Soe	2012/1/15	projection	MM	size	A2	scale	5:1									
tolerance std	ASME Y14.5	eng	Tao Zhan	2013/07/30			ecn no	-	rel level	Released									
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	product family			AIRMAX VS												
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±0.3</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±0.10</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±0.050</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±2°</td> </tr> </table>	linear	0.X	±0.3				0.XX	±0.10		0.XXX	±0.050	angular	0°	±2°		FCI AIRMAX VS2e VERTICAL HEADER SMALL PRESS-FIT, 120 POS, 20.0 mm	cat. no. -	title AIRMAX VS2e VERTICAL HEADER SMALL PRESS-FIT, 120 POS, 20.0 mm
linear	0.X	±0.3																	
	0.XX	±0.10																	
	0.XXX	±0.050																	
angular	0°	±2°																	
ASME Y14.5		appr	Pei-Ming Zheng	2013/07/30	Product - Customer Drw	sheet 1 of 4													

Copyright FCI. FCI

(22.40)
PROTECTIVE CAP WIDTH

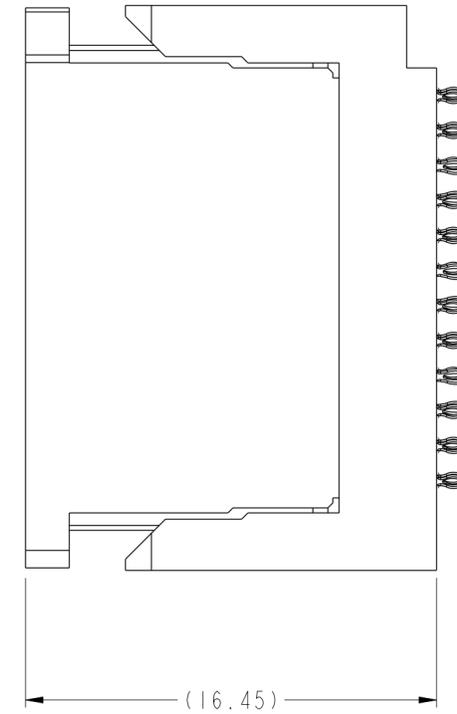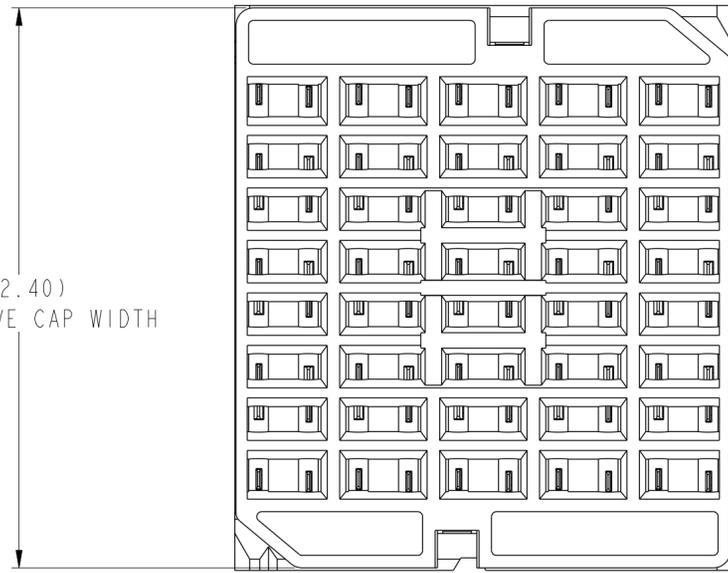

VIEWS SHOWN WITH
PROTECTIVE COVER INSTALLED
10123359-101ILF & 102ILF

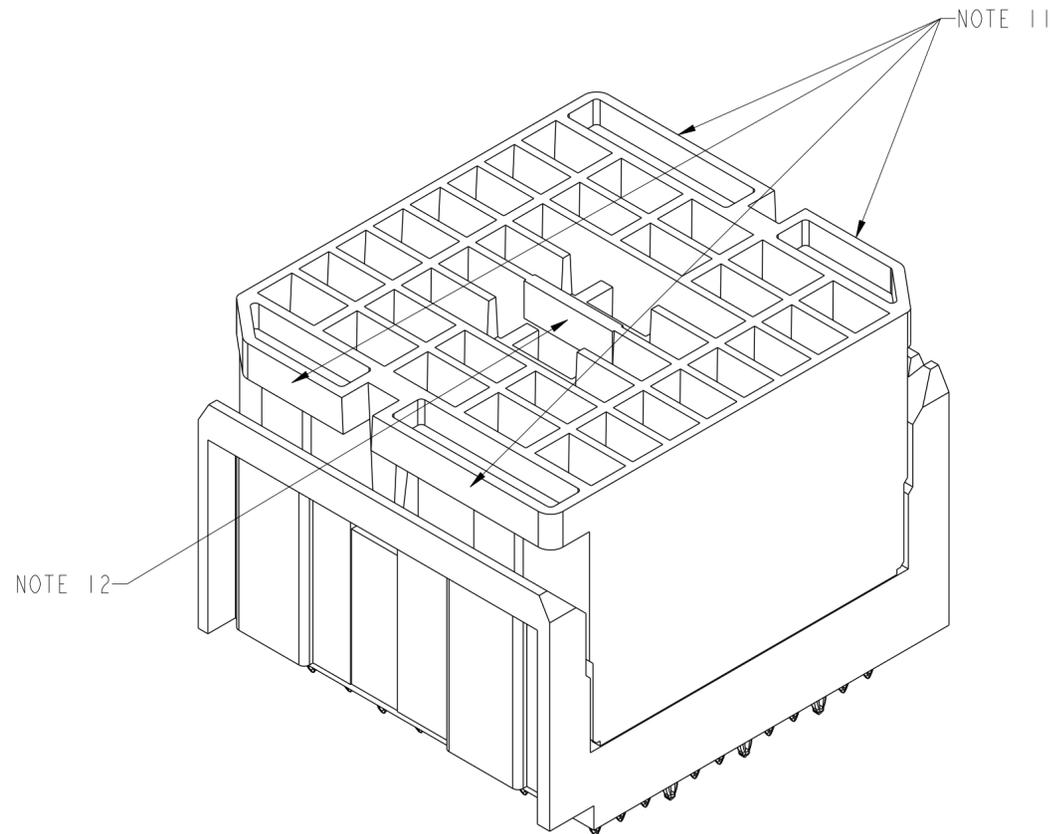

NOTE 12

NOTE 11

spec ref	-	dr	Sander Soe	2012/1/15	projection	MM	size	A2	scale	5:1
tolerance std	ASME Y14.5	eng	Tao Zhan	2013/07/30			ecn no	-	rel level	
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	product family			AIRMAX VS	rel level	Released	
surface	✓	appr	Pei-Ming Zheng	2013/07/30			divg no	10123359	rev	A
ASME Y14.5	linear	0.X	±0.3	0.XX	±0.10	0.XXX	±0.050	angular	0°	±2°
		www.fci.com	cat. no.	-	Product - Customer Drw	sheet 2 of 4				


PDS: Rev :A

STATUS:Released

Printed: Jul 30, 2013




Copyright FCI.

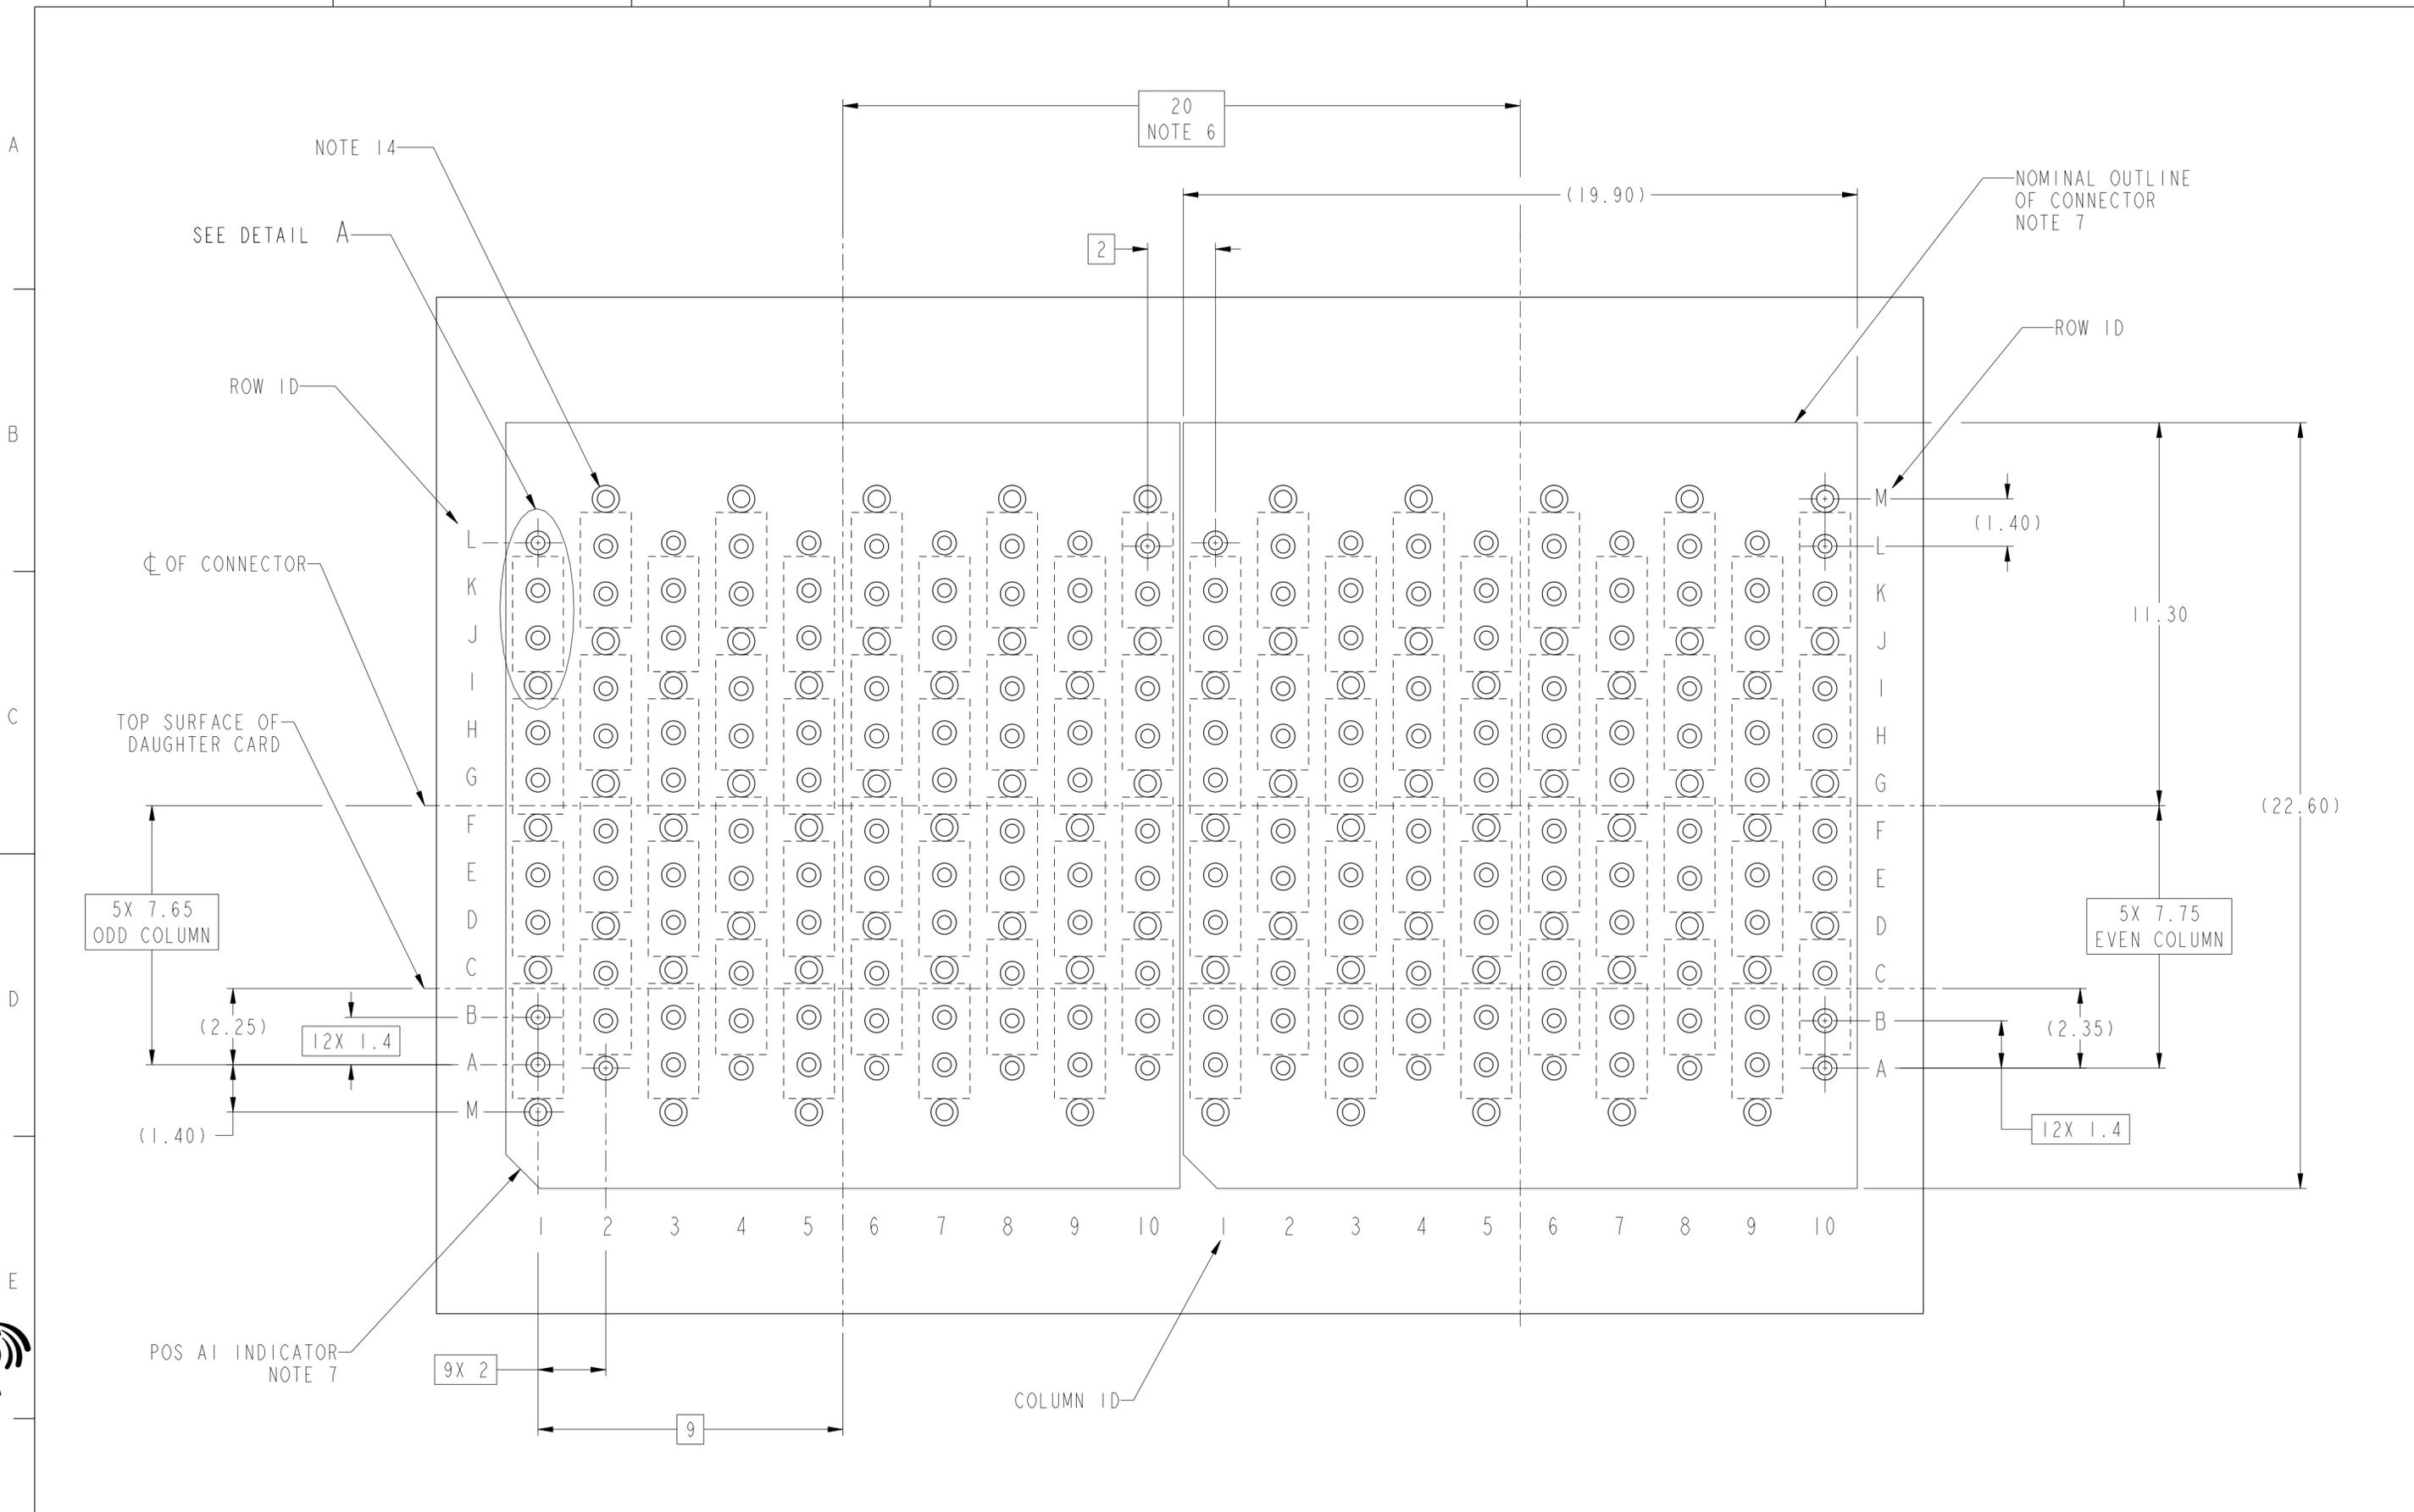

RECOMMENDED PCB LAYOUT
FOR DIFFERENTIAL APPLICATIONS,
COMPONENT SIDE
(TWO ADJACENT FOOTPRINTS SHOWN)
NOTES 6, AND 8

spec ref	-	dr	Sander Soe	2012/1/15	projection	MM	size	A2	scale	3:1	
tolerance std	ASME Y14.5	eng	Tao Zhan	2013/07/30			ecn no	-	rel level	Released	
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	appr							Pei-Ming Zheng
surface	✓	linear	0.X	±0.3		TITLE AIRMAX VS2e VERTICAL HEADER SMALL PRESS-FIT, 120 POS, 20.0 mm	dwg no 10123359	rev A	Product - Customer Drw		
ASME Y14.5	angular	0°	±2°	www.fci.com					cat. no.	-	sheet 3 of 4


PART NUMBER	PRESS-FIT TAIL PLATING TYPE	PROTECTIVE COVER	DETECTION PIN	LONG GROUND PIN LOCATIONS (5.6MM)	REMARKS
10123359-1010LF	TIN OVER NICKEL (LEAD FREE)	NO	NO	F1, F3, F5, F7, F9, G2, G4, G6, G8, G10	1-SIDED PLATING
10123359-1110LF		NO	YES		
10123359-1011LF		YES	NO		
10123359-1111LF		YES	YES		
10123359-1020LF		NO	NO		2-SIDED PLATING
10123359-1120LF		NO	YES		
10123359-1021LF		YES	NO		
10123359-1121LF		YES	YES		

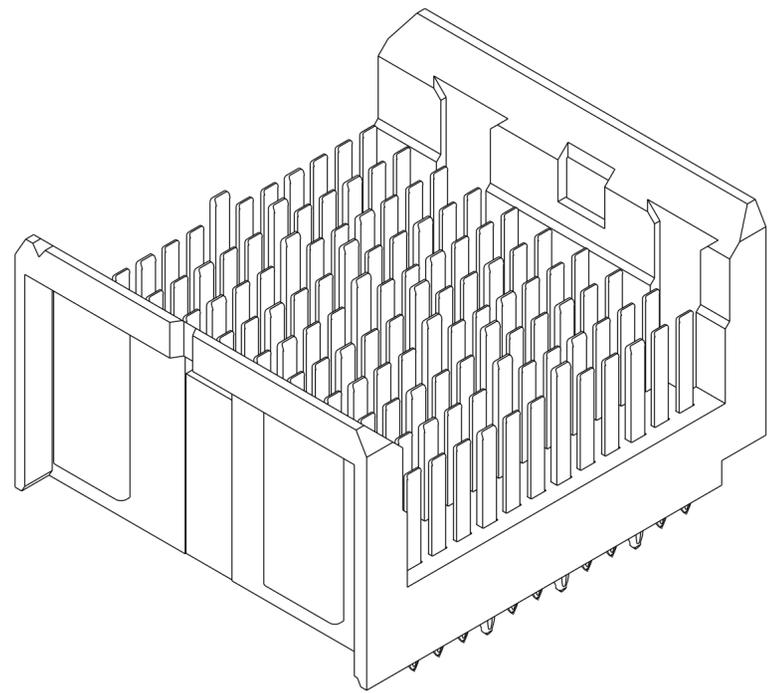

10123359-1010LF & 1020LF

NOTES:

- CONNECTOR MATERIALS:
HOUSING: HIGH TEMP THERMOPLASTIC, BLACK, UL94V-0
CONTACT: COPPER ALLOY
- CONTACT PLATING:
SEPARABLE INTERFACE: PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-XXX INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE TEST SEQUENCE
PRESS-FIT TAILS: SEE TABLE
- PRODUCT SPECIFICATION: GS-12-239.
- APPLICATION SPECIFICATION: GS-20-035.
- PRODUCT MARKING, (PROTOTYPE, PART NUMBER & LOT CODE), ON THIS SURFACE.
- THE MINIMUM CENTERLINE SPACING BETWEEN ADJACENT MODULES IS 20.0 mm.
- CONNECTOR OUTLINE WITH HOUSING POS AI INDICATOR MAY BE SCREEN PRINTED ONTO CUSTOMER PCB TO BE USED AS A GUIDE FOR MANUAL CONNECTOR PLACEMENT.
- REFER TO CUSTOMER DRAWING 10104444 FOR INFORMATION ON PCB HOLE DIAMETERS AND PLATING OPTIONS.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.
- FOR REMOVAL OF THE PROTECTIVE CAP BY HAND GRIP USING THESE SURFACES.
- FOR REMOVAL OF THE PROTECTIVE CAP WITH PLIERS GRIP USING THIS FEATURE.
- GROUND VIAS IN POSITIONS C, F, I, & M FOR ODD COLUMNS AND POSITIONS D, G, J, & M FOR EVEN COLUMNS REQUIRE (Ø0.50) FINISHED HOLES. ALL OTHER VIAS REQUIRE (Ø0.40) FINISHED HOLES.
- THE OUTER VIAS IN COLUMN M ARE OPTIONAL. IF ADDED THESE HOLES PROVIDE GROUND SYMMETRY THROUGH THE PCB. NO CONNECTOR EONS WILL BE PRESSED INTO THESE HOLES.
- MATING PIN H5 IS 0.5mm LESS WIPE NOMINAL THAN THE SHORTEST PIN.

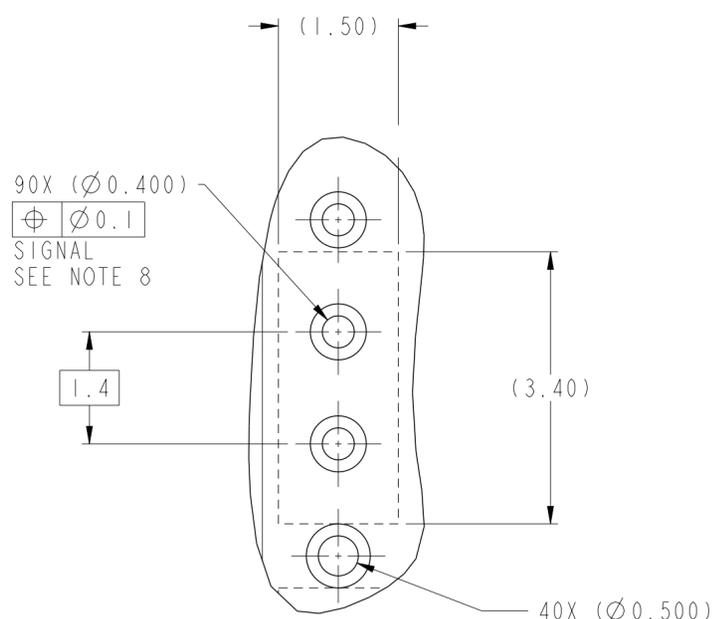

DETAIL A
SCALE 16:1

spec ref	-	dr	Sander Soe	2012/1/15	projection	MM	size	A2	scale	5:1
tolerance std	ASME Y14.5	eng	Tao Zhan	2013/07/30	chr	-	ecn no	-	rel level	Released
TOLERANCES UNLESS OTHERWISE SPECIFIED		appr	Pei-Ming Zheng	2013/07/30	product family	AIRMAX VS	cat. no.	10123359	rev	A
surface	linear	0.X	±0.3	0.XX	±0.10	0.XXX	±0.050	www.fci.com		
ASME Y14.5	angular	0°	±2°	Product - Customer Drw						