

1934305-1 ✓ ACTIVE

Z-PACK | Z-PACK TinMan


TE Internal #: 1934305-1

96 Position High Speed Backplane Connector, 12 Row, 8 Column,
PCB Mount Header, Vertical, Partially Shrouded, Z-PACK TinMan

[View on TE.com >](#)



Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors

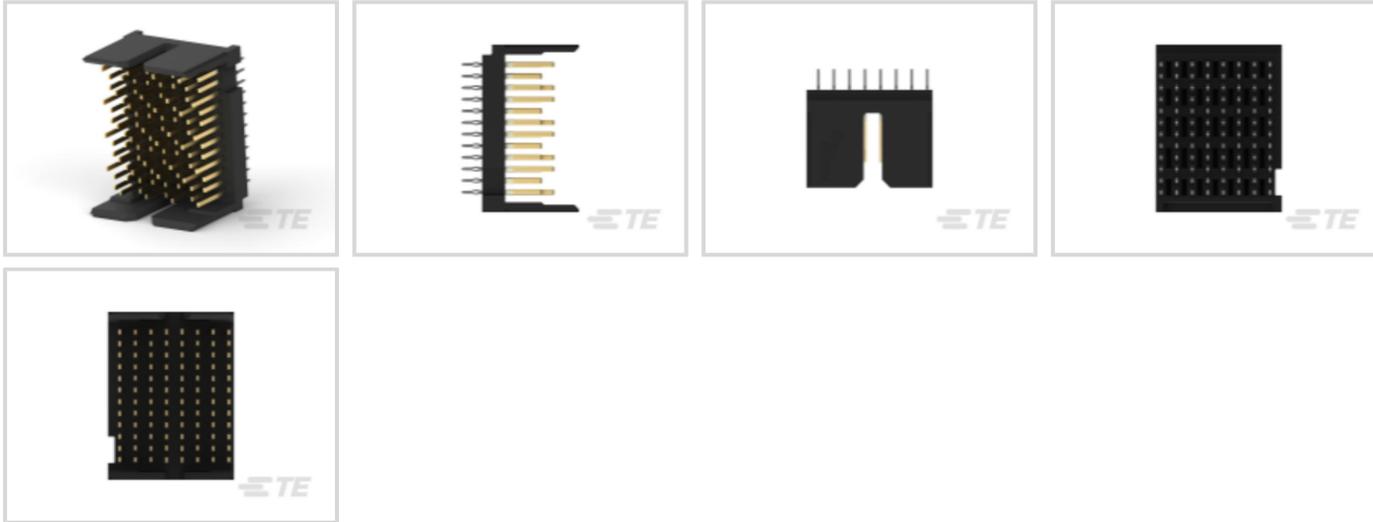

Number of Positions: 96

Row-to-Row Spacing: 1.4 mm [.055 in]

Mating Alignment: With

Mating Alignment Type: Guide Slot

Number of Rows: 12

Features

Product Type Features

Signal Arrangement	Differential
Connector & Contact Terminates To	Printed Circuit Board
Connector System	Board-to-Board
Backplane Module Type	Center
PCB Connector Type	PCB Mount Header
Shroud Style	Partially Shrouded

Configuration Features

Number of Pairs	32
Number of Signal Positions	64
Backplane Architecture	Traditional Backplane
Stackable	No
Pairs per Column	4
Number of Positions	96
Number of Rows	12
Number of Columns	8



PCB Mount Orientation	Vertical
-----------------------	----------

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Impedance	100 Ω
-----------	--------------

Signal Characteristics

Data Rate	10 Gb/s
-----------	---------

Differential Impedance	100 Ω
------------------------	--------------

Number of Differential Pairs per Column	4
---	---

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

PCB Contact Termination Area Plating Material Finish	Matte
--	-------

Contact Mating Area Plating Material Thickness	.76 μm [29.92 μin]
--	---

PCB Contact Termination Area Plating Material Thickness	.5 μm [20 μin]
---	---------------------------------------

Contact Shape & Form	Rectangular
----------------------	-------------

Contact Mating Area Plating Material	Gold (Au)
--------------------------------------	-----------

Contact Mating Area Length	6 mm[.236 in]
----------------------------	---------------

Contact Base Material	Phosphor Bronze
-----------------------	-----------------

PCB Contact Termination Area Plating Material	Tin
---	-----

Contact Type	Pin
--------------	-----

Contact Current Rating (Max)	.5 A
------------------------------	------

Termination Features

Termination Method to PCB	Through Hole - Press-Fit
---------------------------	--------------------------

Termination Post & Tail Length	2.5 mm[.098 in]
--------------------------------	-----------------

Mechanical Attachment

Guide Hardware	Without
----------------	---------

PCB Mount Retention	With
---------------------	------

Mating Retention	Without
------------------	---------

PCB Mount Retention Type	Action/Compliant Tail
--------------------------	-----------------------

PCB Mount Alignment	Without
---------------------	---------

Mating Alignment	With
------------------	------

Mating Alignment Type	Guide Slot
-----------------------	------------



Connector Mounting Type Board Mount

Housing Features

Number of Shrouded Sides	2
End Wall Location	Open
Housing Material	Liquid Crystal Polymer (LCP)
Centerline (Pitch)	1.9 mm[.075 in]

Dimensions

Connector Width	20.2 mm
Connector Height	11.8 mm
PCB Hole Diameter	.47 mm
Connector Length	11.8 mm
Row-to-Row Spacing	1.4 mm[.055 in]

Usage Conditions

Operating Temperature Range	-65 – 90 °C[-85 – 194 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

Compatible With Agency/Standards Products	UL
UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	UL E28476

Packaging Features

Packaging Method	Box & Tube, Tube
------------------	------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC



Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




Also in the Series | Z-PACK TinMan

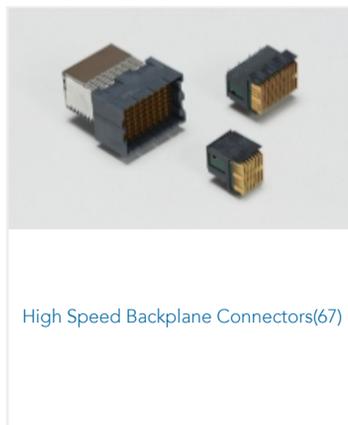

Customers Also Bought




TE Part #120953-1
TE UPM Ver Receptacle 4P HC Power



TE Part #2187738-2
SW PIR HDR BFP, 92OHM, 8X8 OEW



TE Part #2227670-3
zQSFP+ STACKED RECEPTACLE ASSEMBLY 2X2



TE Part #2274842-4
HARDWARE KIT, CFP2, 1X1,




TE Part #2356426-1
RA REC ASSY 4X4, 92OHM PIR WHISPER R




TE Part #6469081-1
HMZD 3PR, RECEPTACLE ASSEMBLY




TE Part #2-6609037-6
12EP1=F8217



TE Part #144127-E
ERMBGR BS GSEFT * LP16 * ERMET-BAUSATZ F



TE Part #923767-E
ERMB 150 MI 1 L1 * 3,50 A-F V-V 9999 * 2



TE Part #923831-E
ERM 66 MI 1 L1 * 3,50 A-F V-V 9999 * 20

Documents

Product Drawings

[Tin Man Header Assy 4x8Open](#)

English

CAD Files

Customer View Model

[ENG_CVM_1934305-1_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_1934305-1_B.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_1934305-1_B.2d_dxf.zip](#)

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



[High Speed Backplane Connectors catalog - Z-PACK TinMan High Speed, High Density Backplane Connector](#)

English

[Z-PACK TinMan High Speed High Density Backplane Connector Catalog 5-1773447-9](#)

English

[Product Specifications](#)

[Application Specification](#)

English