

1934357-1 ✓ ACTIVE

Z-PACK | Z-PACK TinMan


TE Internal #: 1934357-1

90 Position High Speed Backplane Connector, 9 Row, 10 Column,
PCB Mount Header, Right Angle, Partially Shrouded, Z-PACK
TinMan

[View on TE.com >](#)



Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors

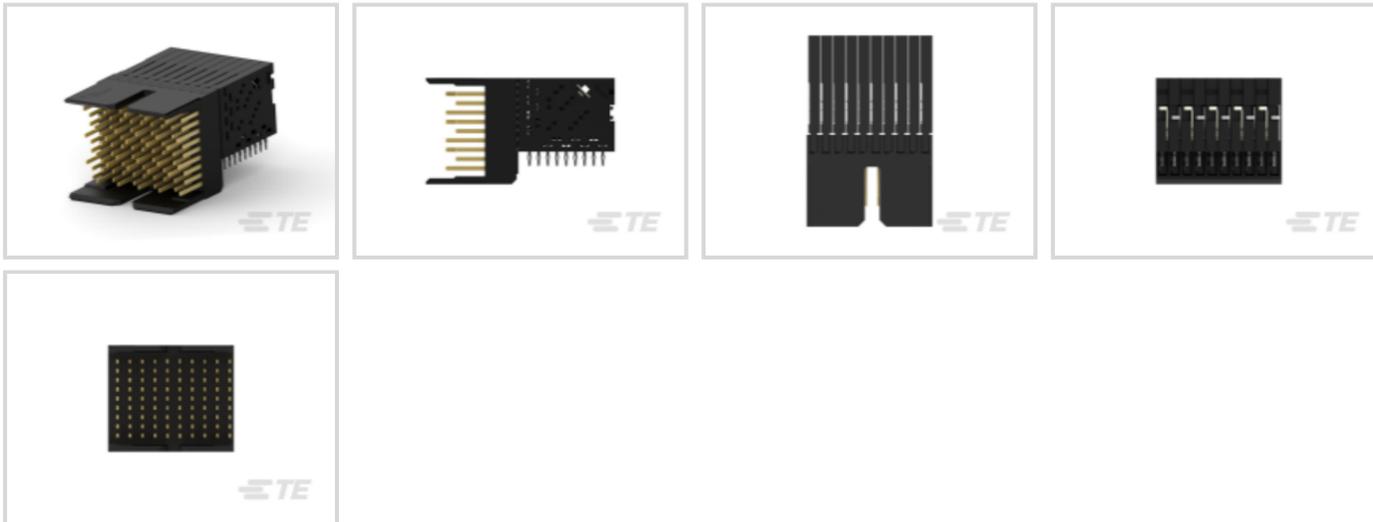

Number of Positions: 90

Row-to-Row Spacing: 1.4 mm [.055 in]

Mating Alignment: **With**

Mating Alignment Type: **Guide Slot**

Number of Rows: 9

Features

Product Type Features

| | |
|-----------------------------------|-----------------------|
| Signal Arrangement | Differential |
| Connector & Contact Terminates To | Printed Circuit Board |
| Connector System | Board-to-Board |
| Backplane Module Type | Center |
| PCB Connector Type | PCB Mount Header |
| Shroud Style | Partially Shrouded |

Configuration Features

| | |
|----------------------------|-----------|
| Number of Pairs | 30 |
| Number of Signal Positions | 60 |
| Backplane Architecture | Co-Planar |
| Stackable | No |
| Pairs per Column | 3 |
| Number of Positions | 90 |
| Number of Rows | 9 |



| | |
|-----------------------|-------------|
| Number of Columns | 10 |
| PCB Mount Orientation | Right Angle |

Electrical Characteristics

| | |
|-------------------|--------------|
| Operating Voltage | 250 VAC |
| Impedance | 100 Ω |

Signal Characteristics

| | |
|-----------------------------------------|--------------|
| Data Rate | 10 Gb/s |
| Differential Impedance | 100 Ω |
| Number of Differential Pairs per Column | 3 |

Body Features

| | |
|-----------------------|-----------------|
| Shield Material | Phosphor Bronze |
| Primary Product Color | Black |

Contact Features

| | |
|---------------------------------------------------------|---------------------------------------|
| PCB Contact Termination Area Plating Material Finish | Matte |
| PCB Contact Termination Area Plating Material Thickness | .5 μm [20 μin] |
| Contact Shape & Form | Rectangular |
| Contact Mating Area Plating Material | Gold (Au) |
| Contact Mating Area Length | 6 mm[.236 in] |
| Contact Base Material | Phosphor Bronze |
| PCB Contact Termination Area Plating Material | Tin |
| Contact Type | Pin |
| Contact Current Rating (Max) | .5 A |

Termination Features

| | |
|--------------------------------|--------------------------|
| Termination Method to PCB | Through Hole - Press-Fit |
| Termination Post & Tail Length | 2.2 mm[.087 in] |

Mechanical Attachment

| | |
|--------------------------|-----------------------|
| Guide Hardware | Without |
| PCB Mount Retention | With |
| Mating Retention | Without |
| PCB Mount Retention Type | Action/Compliant Tail |
| PCB Mount Alignment | Without |
| Mating Alignment | With |



| | |
|-----------------------|------------|
| Mating Alignment Type | Guide Slot |
|-----------------------|------------|

| | |
|-------------------------|-------------|
| Connector Mounting Type | Board Mount |
|-------------------------|-------------|

Housing Features

| | |
|--------------------------|---|
| Number of Shrouded Sides | 2 |
|--------------------------|---|

| | |
|-------------------|------|
| End Wall Location | Open |
|-------------------|------|

| | |
|------------------|------------------------------|
| Housing Material | Liquid Crystal Polymer (LCP) |
|------------------|------------------------------|

| | |
|--------------------|-----------------|
| Centerline (Pitch) | 1.9 mm[.075 in] |
|--------------------|-----------------|

Dimensions

| | |
|-----------------|---------|
| Connector Width | 28.8 mm |
|-----------------|---------|

| | |
|-----------------------------|------------------|
| PCB Thickness (Recommended) | 1.57 mm[.062 in] |
|-----------------------------|------------------|

| | |
|------------------|-------|
| Connector Height | 16 mm |
|------------------|-------|

| | |
|-------------------|--------|
| PCB Hole Diameter | .47 mm |
|-------------------|--------|

| | |
|------------------|----------|
| Connector Length | 19.15 mm |
|------------------|----------|

| | |
|--------------------|-----------------|
| Row-to-Row Spacing | 1.4 mm[.055 in] |
|--------------------|-----------------|

Usage Conditions

| | |
|-----------------------------|---------------------------|
| Operating Temperature Range | -65 – 90 °C[-85 – 194 °F] |
|-----------------------------|---------------------------|

Operation/Application

| | |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

Industry Standards

| | |
|-------------------------------------------|----|
| Compatible With Agency/Standards Products | UL |
|-------------------------------------------|----|

| | |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

| | |
|---------------------------------------------|-----------|
| Compatible With Approved Standards Products | UL E28476 |
|---------------------------------------------|-----------|

Packaging Features

| | |
|------------------|------------------|
| Packaging Method | Box & Tube, Tube |
|------------------|------------------|

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|------------------------------|-----------|
| EU RoHS Directive 2011/65/EU | Compliant |
|------------------------------|-----------|

| | |
|-----------------------------|-----------|
| EU ELV Directive 2000/53/EC | Compliant |
|-----------------------------|-----------|

| | |
|-----------------------------------------------|---------------------------------------------------------|
| China RoHS 2 Directive MIIT Order No 32, 2016 | 有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold |
|-----------------------------------------------|---------------------------------------------------------|

| | |
|----------------------------------------|----------------------------------------------|
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2025 (250) |
|----------------------------------------|----------------------------------------------|



Candidate List Declared Against: JUNE 2025 (250)
Does not contain REACH SVHC

| | |
|---------------------------|----------------------------------------------------------------------------------|
| Halogen Content | Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability |


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | Z-PACK TinMan

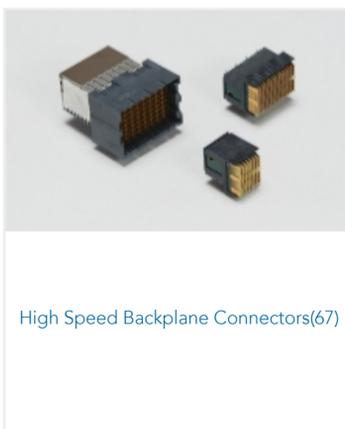

Customers Also Bought



TE Part #CAT-D48-ST273
DEUTSCH Connector Solid Contacts



TE Part #CAT-D487-W416
Wedgelocks: DEUTSCH DT



TE Part #DT04-2P
REC, 2P, GRY, N



TE Part #DT06-2S
PLG, 2P, GRY, N



TE Part #114017-ZZ
SEALING PLUG, SIZE 12/16, WHT



TE Part #281934-2
SINGLE WIRE SEAL



TE Part #CAT-AM71-CH8172
AMP SUPERSEAL 1.5MM,
CONNECTOR HOUSING

Documents

Product Drawings

[Tinman R/A Header Assy 3x10 Open](#)

English

CAD Files

[Customer View Model](#)

[ENG_CVM_CVM_1934357-1_B.2d_dxf.zip](#)

English

[3D PDF](#)

3D

[Customer View Model](#)

[ENG_CVM_CVM_1934357-1_B.3d_igs.zip](#)

English

[Customer View Model](#)

[ENG_CVM_CVM_1934357-1_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[High Speed Backplane Connectors catalog - Z-PACK TinMan High Speed, High Density Backplane Connector](#)

English

Product Specifications

[Application Specification](#)

English