

5106773-1 ✓ ACTIVE

Z-PACK | Z-PACK 2mm HM

TE Internal #: 5106773-1

Hard Metric Backplane PCB Mount Receptacle,  $\leq 1$  Gb/s, 22

Column, 5 Row, Mezzanine, 110 Position, 2 mm [.078 in] Centerline,


Vertical, Z-PACK 2mm HM

[View on TE.com >](#)



[Connectors](#) > [PCB Connectors](#) > [Backplane Connectors](#) > [Hard Metric Backplane Connectors](#) >

Hard Metric Backplane Receptacle Connector: Mezzanine, 2mm

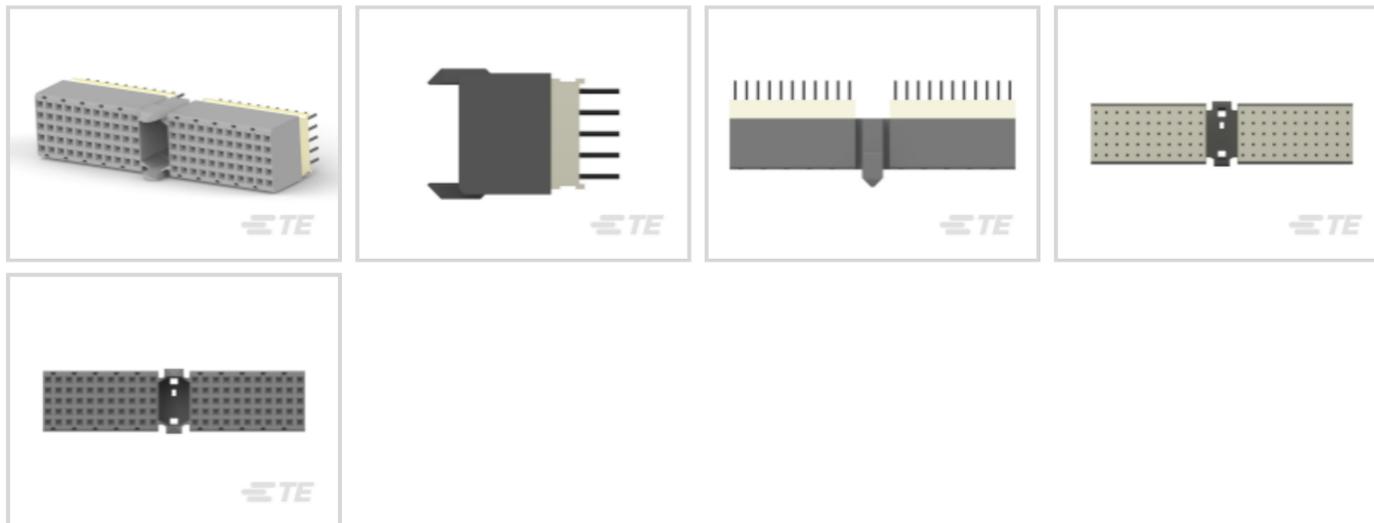

PCB Connector Type: **PCB Mount Receptacle**

Data Rate:  $\leq 1$  Gb/s

Number of Columns: **22**

Number of Rows: **5**

Backplane Architecture: **Mezzanine**

[All Hard Metric Backplane Receptacle Connector: Mezzanine, 2mm \(27\)](#)

## Features

### Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Connector System	Board-to-Board
PCB Connector Type	PCB Mount Receptacle
Sealable	No

### Configuration Features

Number of Signal Positions	110
Number of Columns	22
Number of Rows	5
Backplane Architecture	Mezzanine
Number of Positions	110
PCB Mount Orientation	Vertical

### Signal Characteristics



Crosstalk Version	Reduced
-------------------	---------

Data Rate	≤1 Gb/s
-----------	---------

### Body Features

Primary Product Color	Gray
-----------------------	------

### Contact Features

Contact Underplating Material	Nickel
-------------------------------	--------

Contact Mating Area Length	3.3 mm
----------------------------	--------

Contact Base Material	Phosphor Bronze
-----------------------	-----------------

CompactPCI Designation	None
------------------------	------

PCB Contact Termination Area Plating Material	Tin
---	-----

Feedthrough Post Length	3.7 mm
-------------------------	--------

Contact Type	Socket
--------------	--------

Contact Mating Area Plating Material	Nickel (Ni)
--------------------------------------	-------------

Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]
--	-----------------

Contact Current Rating (Max)	1.5 A
------------------------------	-------

### Mechanical Attachment

Connector Mounting Type	Board Mount
-------------------------	-------------

Mating Alignment Type	Multi-Purpose Center
-----------------------	----------------------

### Housing Features

Housing Material	Polyester GF
------------------	--------------

Centerline (Pitch)	2 mm[.078 in]
--------------------	---------------

### Dimensions

Backplane Module Length	50 mm
-------------------------	-------

### Usage Conditions

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
-----------------------------	----------------------------

### Operation/Application

Shielded	No
----------	----

Circuit Application	Power & Signal
---------------------	----------------

### Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

### Packaging Features

Packaging Quantity	11
Packaging Method	Tray

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability


### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



Also in the Series | **Z-PACK 2mm HM**

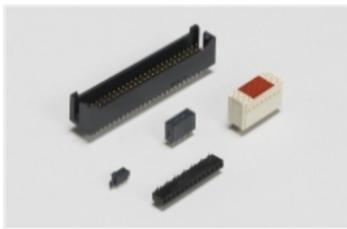


Board-to-Board Headers & Receptacles(46)



Connector Contacts(1)



Connector Hardware(91)

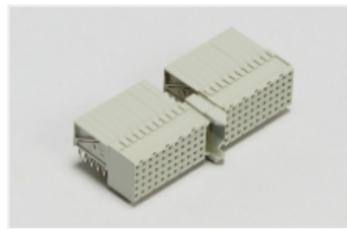

Hard Metric Backplane Connectors (264)



Power Contacts(1)




Rectangular Power Connectors(46)

## Customers Also Bought




TE Part #HPP816E056  
TRICAN 24V HTD2800P1B11C6STD



TE Part #Y22630-14-19PC0330  
HERM RECP



TE Part #1-179277-5  
DYNAMIC 3200 HDR ASSY 4P H

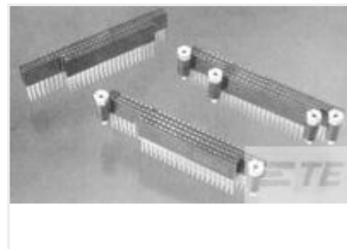

TE Part #1375793-2  
PC104 ASY 2S/0 STKTHRU UNKEYED




TE Part #1-1469372-1  
ATCA GUIDE MODULE RA MALE




TE Part #1658723-2  
ASSY SFP CAGE 1X4 SOLDER TAIL




TE Part #5100147-1  
Z-PACK/A RAF 110P



TE Part #2260281-1  
REC ASSEMBLY, SE2 CONN



TE Part #6-2432269-3  
ASSY STRADDLE 85Ohm 168P 062 SLIVER 2.0



TE Part #2822649-2  
IP RESET JIG, TYPE B

## Documents



## Product Drawings

### Z-PACK/A VF 110P

English

---

## CAD Files

### Customer View Model

[ENG\\_CVM\\_CVM\\_5106773-1\\_A.2d\\_dxf.zip](#)

English

### 3D PDF

3D

### Customer View Model

[ENG\\_CVM\\_CVM\\_5106773-1\\_A.3d\\_igs.zip](#)

English

### Customer View Model

[ENG\\_CVM\\_CVM\\_5106773-1\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

## Product Specifications

### Application Specification

English