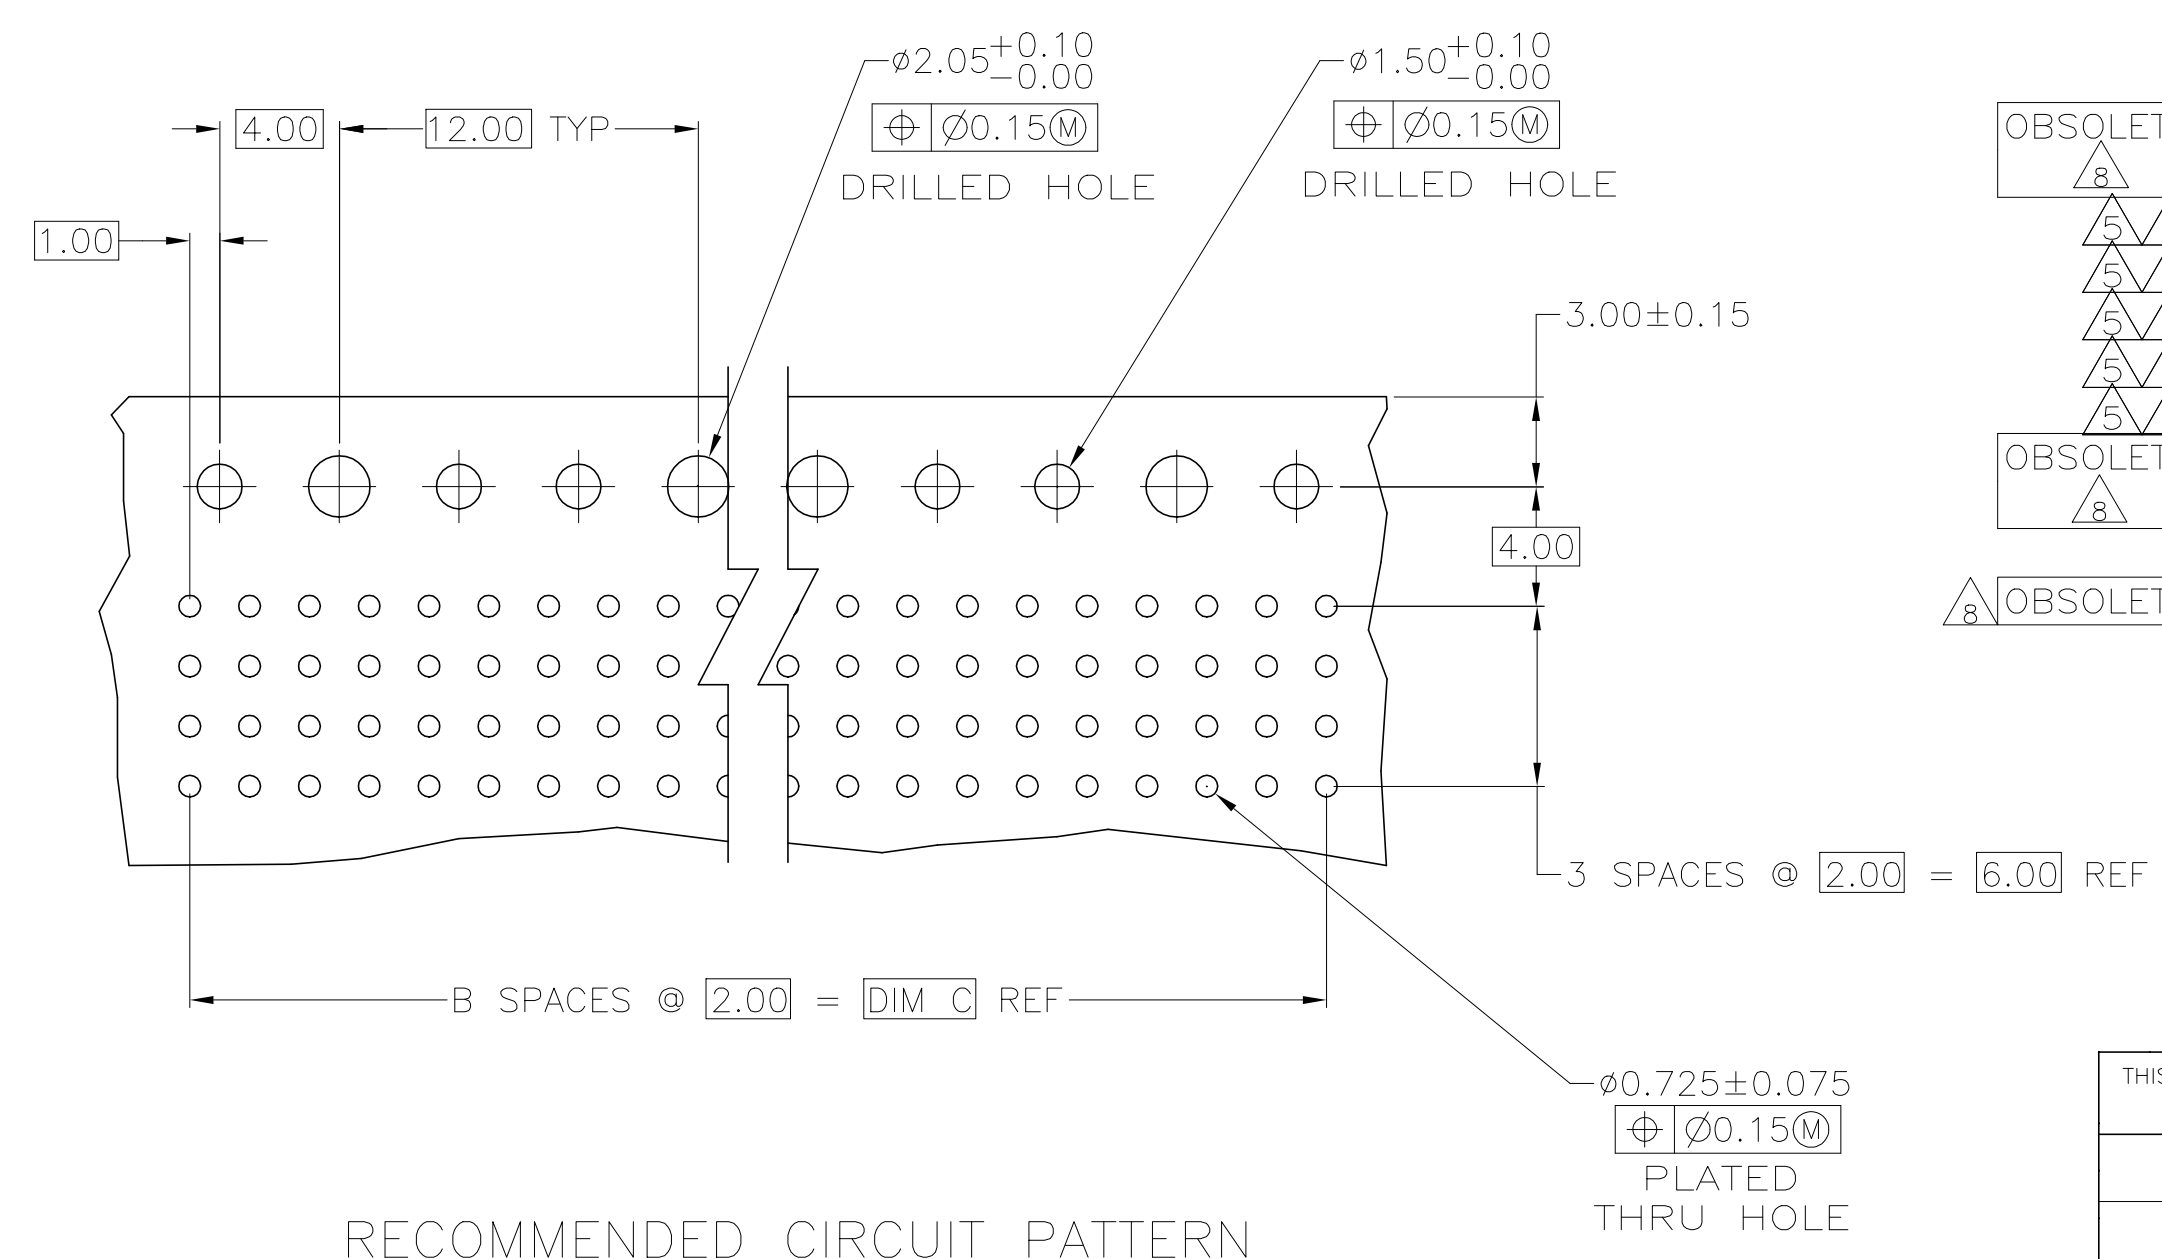
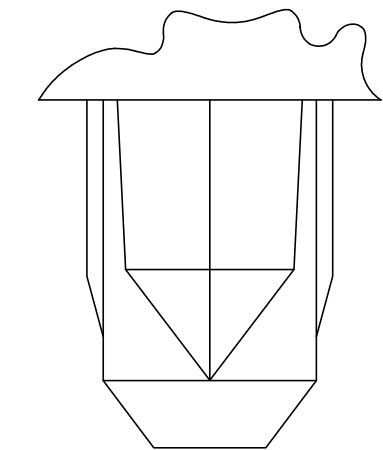
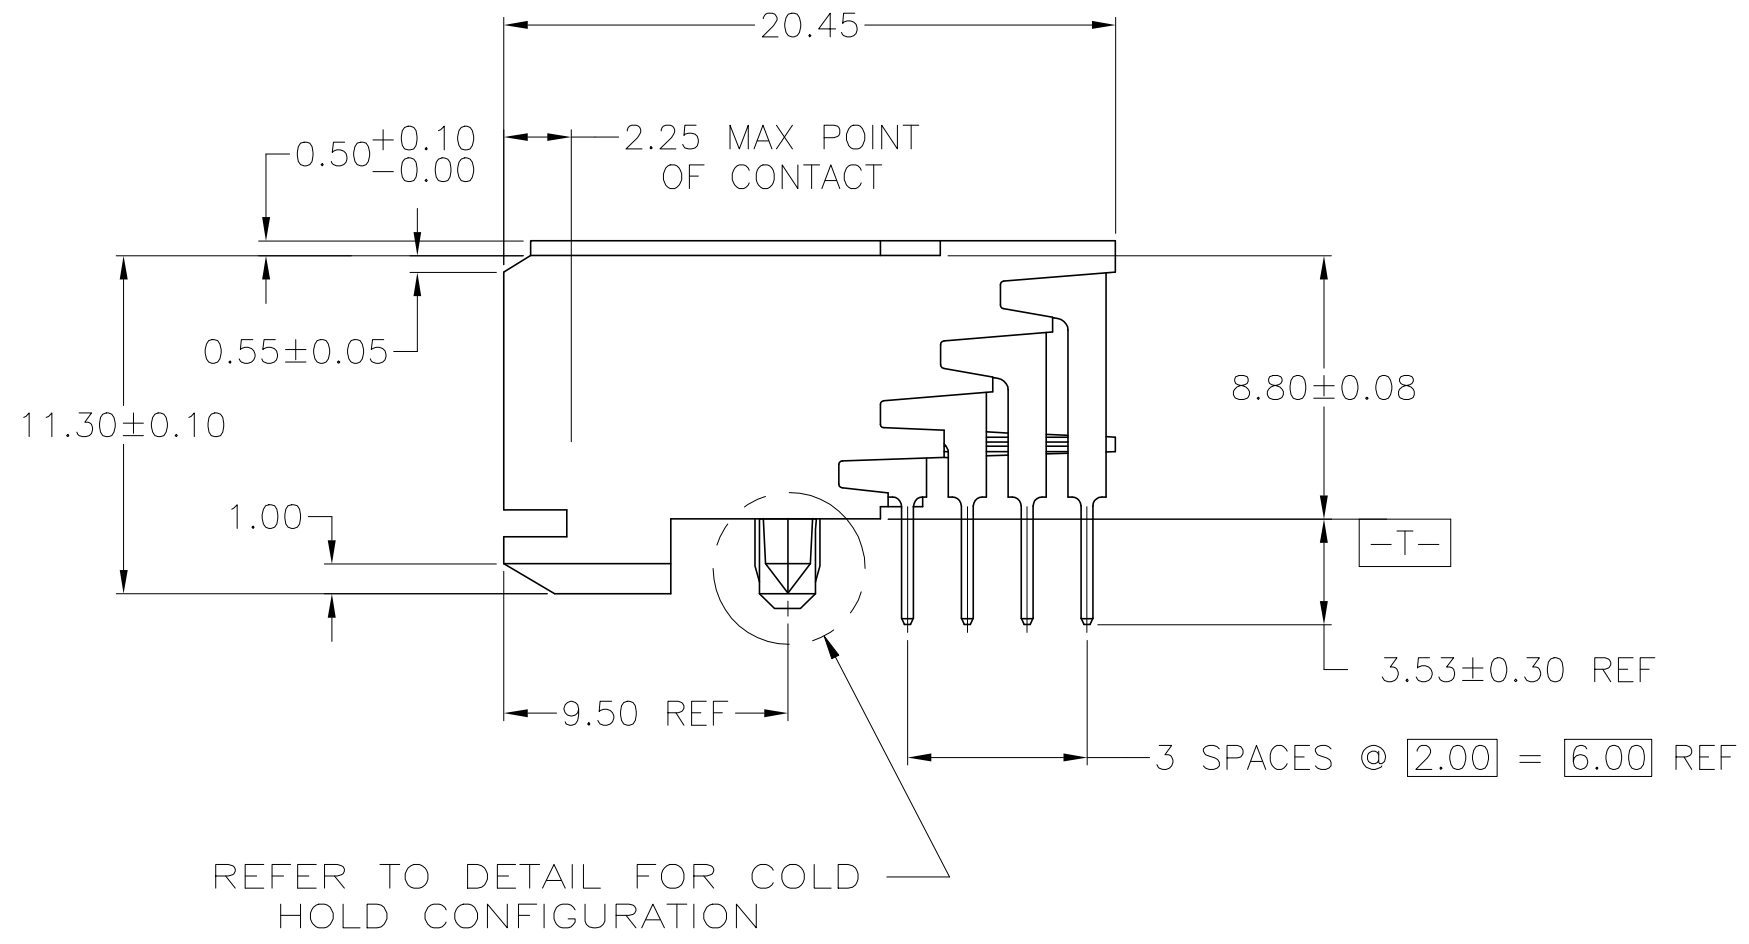


TYPICAL COLD HOLD
FOR ALL ASSEMBLIES

OBSOLETE		NO	70	35	71.88		144	2-5536510-8
		NO	94	47	95.88		192	2-5536510-7
		NO	46	23	47.88		96	2-5536510-6
		NO	22	11	23.88		48	2-5536510-5
		YES	94	47	95.88		192	2-5536510-4
		YES	46	23	47.88		96	2-5536510-3
		NO	34	17	35.88		72	1-5536510-5
		NO	22	11	23.88		48	1-5536510-4
		NO	94	47	95.88		192	1-5536510-3
		NO	106	53	107.88		216	1-5536510-2
OBSOLETE		NO	70	35	71.88		144	1-5536510-1
		NO	130	65	131.88		264	1-5536510-0
 OBSOLETE		NO	106	53	107.88		216	5536510-9
		NO	118	59	119.88		240	5536510-8
		NO	82	41	83.88		168	5536510-7
		NO	58	29	59.88		120	5536510-6
		NO	70	35	71.88		144	5536510-5
		NO	94	47	95.88		192	5536510-4
		NO	46	23	47.88		96	5536510-3
		NO	22	11	23.88		48	5536510-2
		YES	10	5	11.88		24	5536510-1
	= [6.00] REF	POSITIONING PEGS	C	B	A	FINISH	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN: B. MCMMASTER CHK: R. WERTZ 31AUG04 31AUG04		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± . 1 PLC ± . 2 PLC ± .13 3 PLC ± . 4 PLC ± . ANGLES ± .		NAME RECEPTACLE ASSEMBLY, SIGNAL MODULE, Z-PACK 2mm FB,4 ROW, 3.53mm LEAD LENGTH	
		APVD: R. WERTZ 31AUG04 PRODUCT SPEC — APPLICATION SPEC —		SIZE A1	
MATERIAL 		WEIGHT 0.000000		CAGE CODE 00779	
FINISH 		DRAWING NO C=55.36510		RESTRICTED TO —	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 of 1 REV B	

RECOMMENDED CIRCUIT PATTERN
PER IPC-D300 TYPE II, CLASS C
(COMPONENT SIDE)