

1-1718230-1 ✓ ACTIVE




TE Internal #: 1-1718230-1

12 V / 24 V / 48 V, 7 Position, Automotive Housing for Male
Terminals, Wire-to-Wire, Sealable, Blue, Wire & Cable, Power,
Cable Mount (Free-Hanging)

[View on TE.com >](#)

Automotive Parts > Automotive Connectors > Automotive Housings > Circular DIN Housings

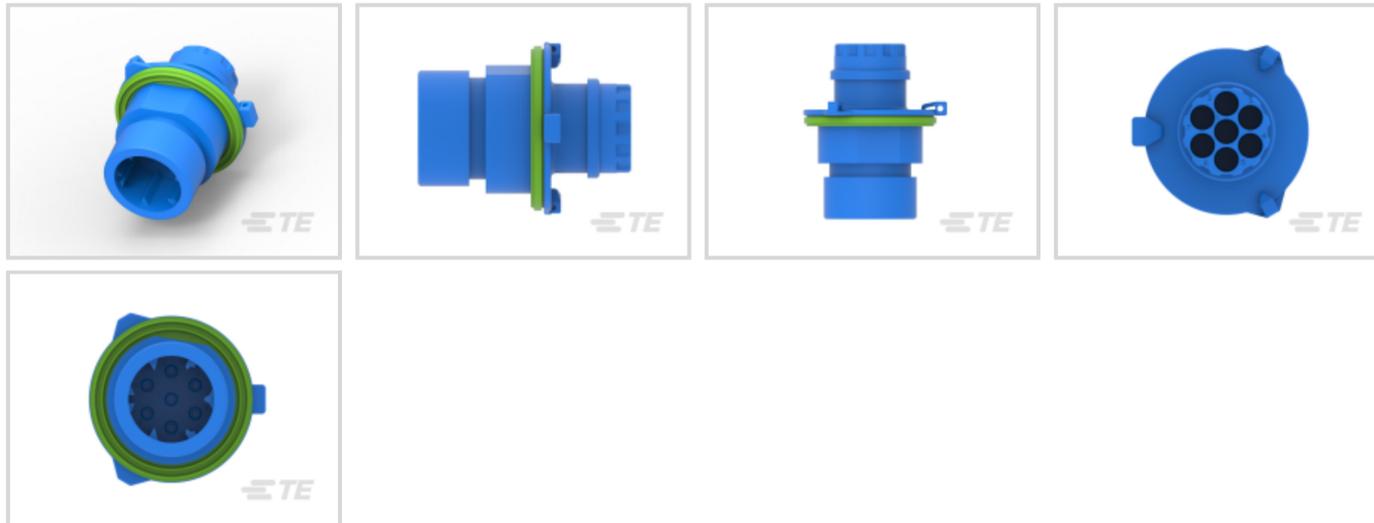

Nominal Voltage Architecture: 12 V, 24 V, 48 V

Connector & Housing Type: **Housing for Male Terminals**

Number of Positions: 7

Sealable: **Yes**

Operating Temperature Range: -40 – 120 °C [-40 – 248 °F]

[All Circular DIN Housings \(59\)](#)

Features

Product Type Features

| | |
|-----------------------------------|----------------------------|
| Mixed & Hybrid Connector | No |
| Connector Shape | Circular |
| Connector & Housing Type | Housing for Male Terminals |
| Sealable | Yes |
| Primary Locking Feature | Integrated in Housing |
| Connector System | Wire-to-Wire |
| Connector & Contact Terminates To | Wire & Cable |

Configuration Features

| | |
|---------------------|---|
| Number of Positions | 7 |
|---------------------|---|

Electrical Characteristics

| | |
|------------------------------|------------------|
| Nominal Voltage Architecture | 12 V, 24 V, 48 V |
|------------------------------|------------------|

Body Features

| | |
|------------------|-------|
| Cable Exit Angle | 180 ° |
|------------------|-------|



| | |
|-----------------------|------|
| Primary Product Color | Blue |
|-----------------------|------|

| | |
|-------------------------|---|
| Connector & Keying Code | A |
|-------------------------|---|

Contact Features

| | |
|--------------|-------|
| Contact Size | 1.5mm |
|--------------|-------|

| | |
|--------------|-----|
| Contact Type | Pin |
|--------------|-----|

| | |
|---------------------|-----------------|
| Mating Pin Diameter | 1.5 mm[.059 in] |
|---------------------|-----------------|

Mechanical Attachment

| | |
|---------------|---------|
| Strain Relief | Without |
|---------------|---------|

| | |
|-----------------------------|----|
| Terminal Position Assurance | No |
|-----------------------------|----|

| | |
|-----------------------|-------|
| Mating Alignment Type | Keyed |
|-----------------------|-------|

| | |
|------------------|------|
| Mating Alignment | With |
|------------------|------|

| | |
|-------------------------|----------------------------|
| Connector Mounting Type | Cable Mount (Free-Hanging) |
|-------------------------|----------------------------|

Housing Features

| | |
|------------------|--------|
| Housing Material | PBT GF |
|------------------|--------|

Dimensions

| | |
|----------------|----------------|
| Product Length | 44 mm[1.73 in] |
|----------------|----------------|

| | |
|------------------|---------------|
| Connector Height | 28 mm[1.1 in] |
|------------------|---------------|

Usage Conditions

| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -40 – 120 °C[-40 – 248 °F] |
|-----------------------------|----------------------------|

| | |
|-----------------------------|----------------|
| Operating Temperature (Max) | 120 °C[248 °F] |
|-----------------------------|----------------|

Operation/Application

| | |
|---------------------|-------|
| Circuit Application | Power |
|---------------------|-------|

Industry Standards

| | |
|-----------|-------|
| IP Rating | IP69K |
|-----------|-------|

| | |
|------------------------|---------|
| UL Flammability Rating | UL 94HB |
|------------------------|---------|

Packaging Features

| | |
|------------------|-----|
| Packaging Method | Box |
|------------------|-----|

| | |
|--------------------|-----|
| Packaging Quantity | 450 |
|--------------------|-----|

Other

| | |
|-------------|-----|
| Serviceable | Yes |
|-------------|-----|

| | |
|--------------------------------------|----|
| Connector Position Assurance Capable | No |
|--------------------------------------|----|

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | 有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1418919-1
MULTI CORE CABLE ADAPTER 90 DEGREE



TE Part # CAT-R7602-T273
ROUND CONNECTOR SYSTEM, PIN AND SOCKET



TE Part # 1534789-1
ADAPTER 90DEG 4/7POS



TE Part # 965785-1
ABDECKKAPPE 180GRD



Customers Also Bought





Documents

Product Drawings

[1,5MM PIN HSG 5-7 POS ASSY](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_1-1718230-1_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1718230-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1718230-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English