

HDB36-24-91SN-059 ✓ ACTIVE

DEUTSCH | DEUTSCH HD, DEUTSCH HD30


TE Internal #: HDB36-24-91SN-059

12 V, 9 Position, Automotive Housing for Female Terminals, Wire-to-Wire, Sealable, Wire & Cable, Power, Panel Mount, Hybrid

[View on TE.com >](#)



Automotive Parts > Automotive Connectors > Automotive Housings > DEUTSCH HD30 Housings

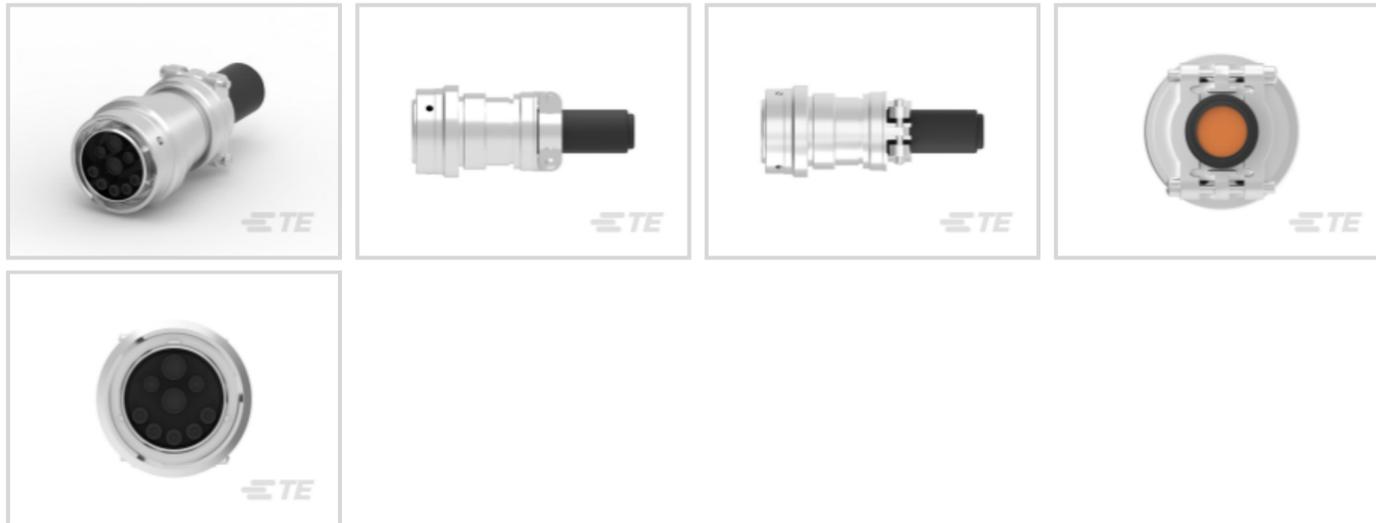

Nominal Voltage Architecture: 12 V

Connector & Housing Type: **Housing for Female Terminals**

Number of Positions: 9

Sealable: **Yes**

Operating Temperature Range: -55 – 125 °C [-67 – 257 °F]

[All DEUTSCH HD30 Housings \(324\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	Yes
Connector Shape	Circular
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	Contact Retainer
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Connector Modification	Cable Clamp
Connector Seal Code	N Seal
Number of Positions	9

Electrical Characteristics

Operating Voltage	250 VDC
-------------------	---------



Nominal Voltage Architecture	12 V
------------------------------	------

Body Features

Cable Exit Angle	180 °
------------------	-------

Contact Features

Contact Size	Size 12, Size 16, Size 8
--------------	--------------------------

Contact Type	Socket
--------------	--------

Mating Pin Diameter	1.6 mm, 2.4 mm, 3.6 mm [.063 in][.094 in][.142 in]
---------------------	--

Contact Current Rating (Max)	13 A, 25 A, 60 A
------------------------------	------------------

Mechanical Attachment

Strain Relief	With
---------------	------

Terminal Position Assurance	No
-----------------------------	----

Mating Alignment Type	Guide Slot
-----------------------	------------

Mating Alignment	With
------------------	------

Connector Mounting Type	Panel Mount
-------------------------	-------------

Housing Features

Housing Material	Aluminum Alloy
------------------	----------------

Dimensions

Compatible Insulation Diameter Range	1.4 – 3.8 mm, 3.6 – 5.2 mm [.055 – .15 in][.14 – .204 in]
--------------------------------------	---

Product Width	49.3 mm [1.94 in]
---------------	-------------------

Product Length	49.3 mm [1.94 in]
----------------	-------------------

Connector Height	81 mm [3.19 in]
------------------	-----------------

Usage Conditions

Operating Temperature Range	-55 – 125 °C [-67 – 257 °F]
-----------------------------	-----------------------------

Operating Temperature (Max)	125 °C [257 °F]
-----------------------------	-----------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

IP Rating	IP67
-----------	------

Packaging Features

Packaging Quantity	1
--------------------	---



Packaging Method

Package

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) SVHC > Threshold: Pb (1.2% in 74004969) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>




Compatible Parts




Also in the Series | **DEUTSCH HD**

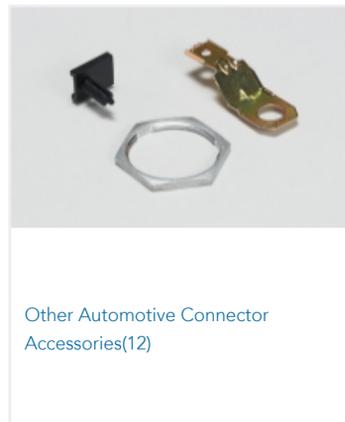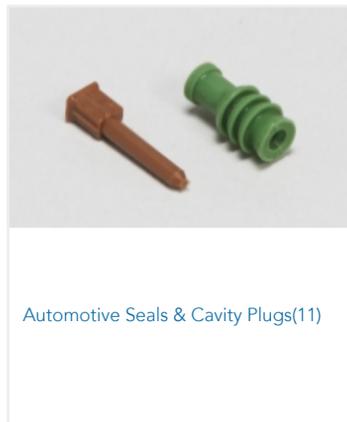

Also in the Series | **DEUTSCH HD30**

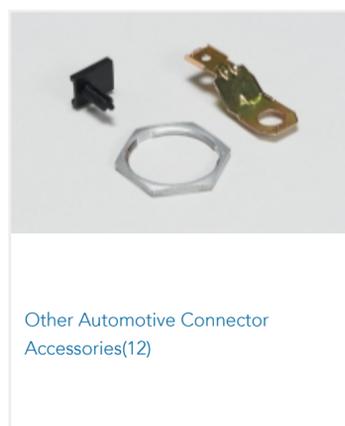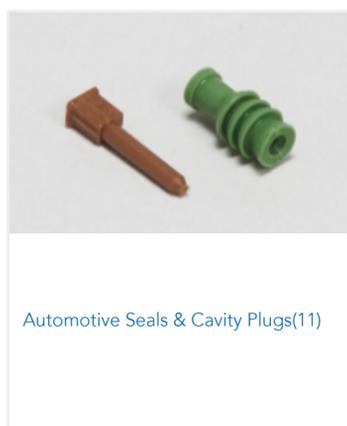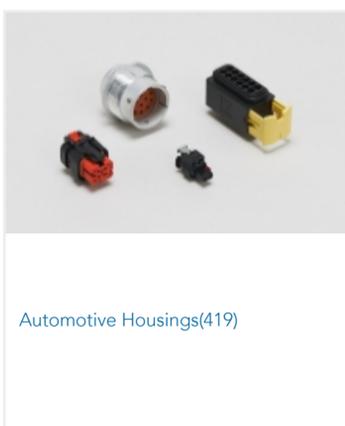

Customers Also Bought

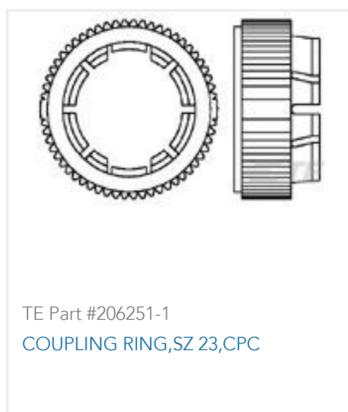

Documents

Product Drawings

[BR AWY PL ASM,MC](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_HDB36-24-91SN-059_A_c-hdb36-24-91sn-059-a.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_HDB36-24-91SN-059_A_c-hdb36-24-91sn-059-a.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_HDB36-24-91SN-059_A_c-hdb36-24-91sn-059-a.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



[ICT Terminals and Connectors Catalogue](#)

English

[CONNECTOR SELECTOR](#)

English

[Product Specifications](#)

[Application Specification](#)

English