


Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

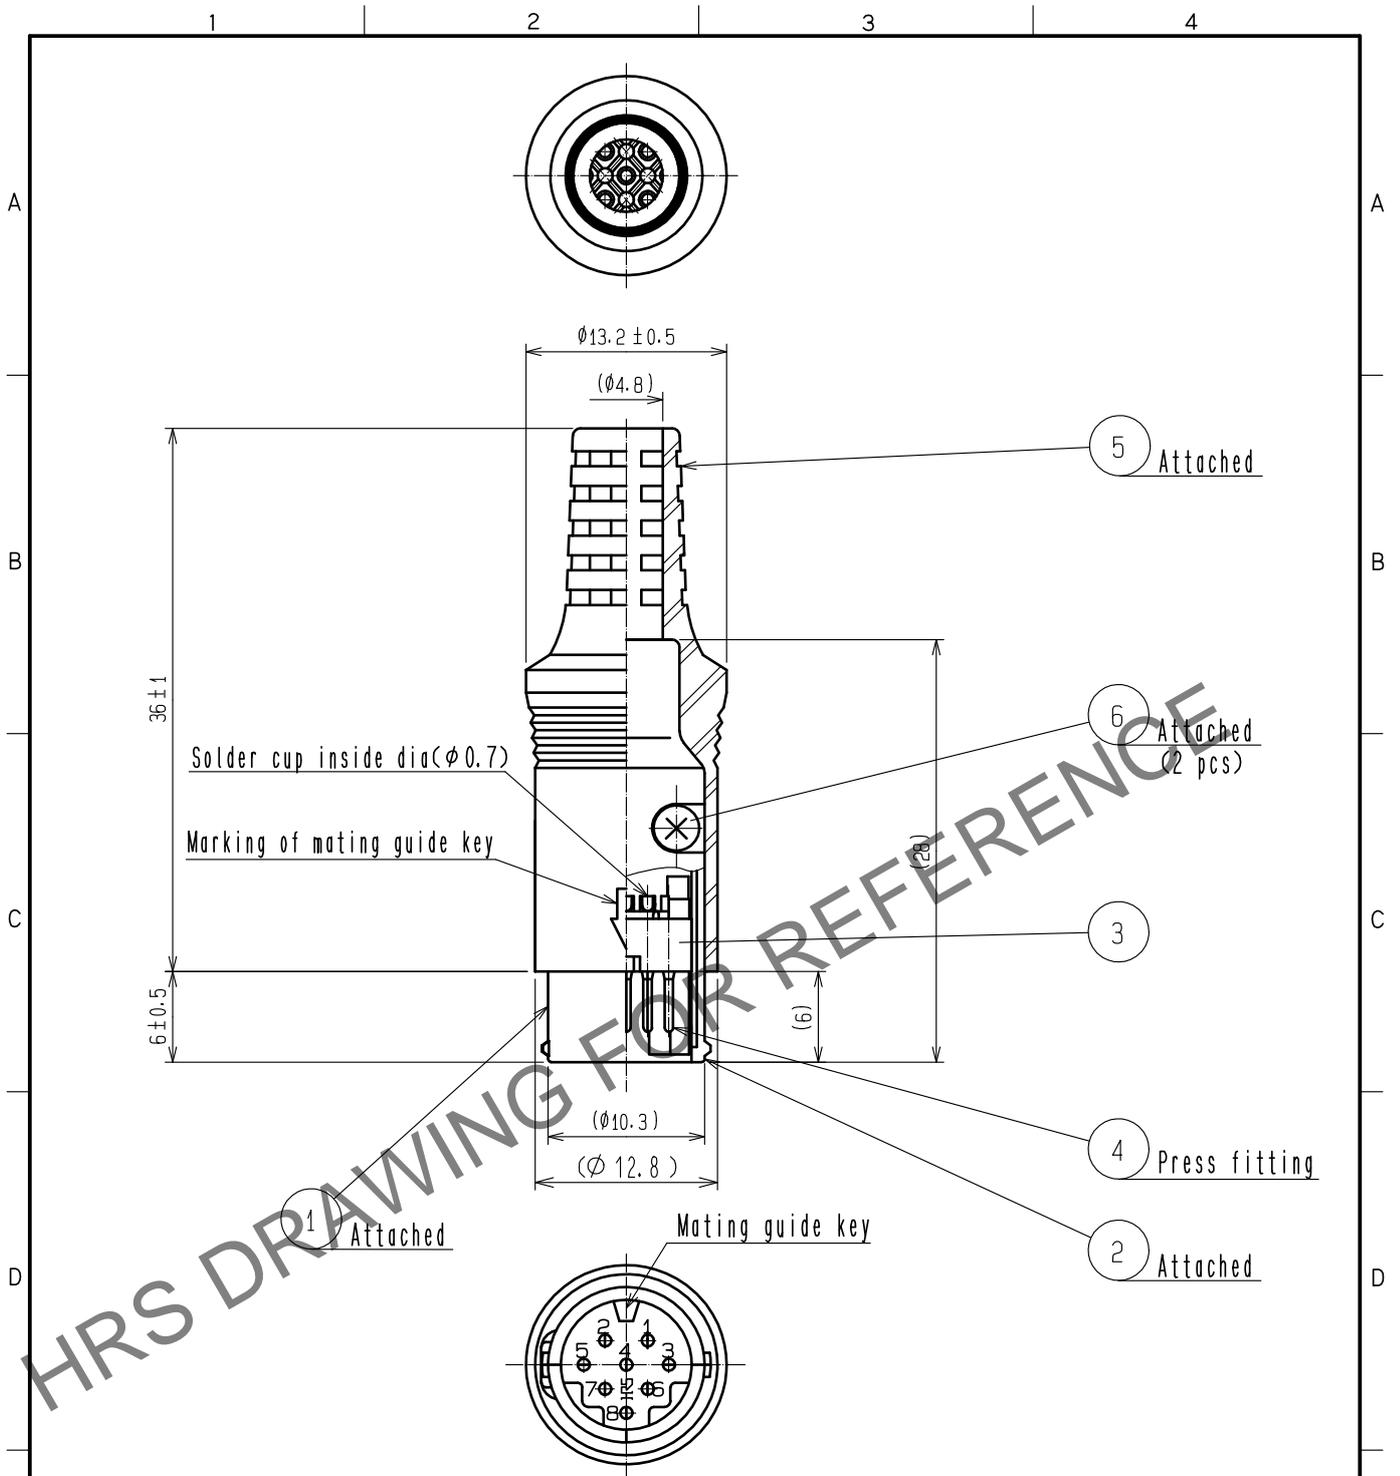

Notes) 1. Assembling should be done as per drawing.  
2. The cable clamping power and the turning force, etc. are different according to the structure of the cable, and use it, please after it confirms it beforehand.

3	PPS	(Black) UL94V-0	6	Steel	Nickel plating Tapping screw M2×4
2	Zink alloy	Nickel plating	5	Soft polyvinyl chloride	(Black) UL94V-0
1	Zink alloy	Nickel plating	4	Copper alloy	Selective gold plating (0.2μm min)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : TP. KOMATSU 20201121	DRAWING NO. EDC-043932-43-00				
		CHECKED : HY. KOBAYASHI 20201119	PART NO. HR212-10P-8P(43)				
		DESIGNED : TY. SUZUKI 20201119	CODE NO. CL0112-4001-3-43				
		DRAWN : TY. SUZUKI 20201119					